

MATRIX™ MICRO 2


RECESSED

TYPE:

PROJECT NAME:



Recessed square **IP40** downlight, for indoor false ceiling applications, ideal for the lighting of residential and commercial areas, shop windows, corridors, meeting rooms, offices.

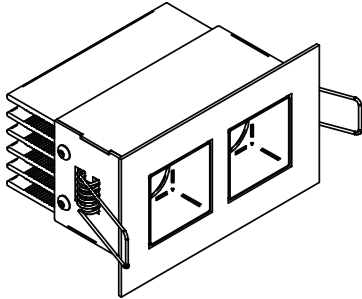

IP40



kg 0,39




90x50 mm



Intertek


SUPPLY	W	LM CRI>90	OPTICS	LED COLOR	CODE + FINISH
120Vac	12	1120	12°	2700 K	L0122321 .02 .05 .08
120Vac	12	1200	12°	3000 K	L0122331 .02 .05 .08
120Vac	12	1280	12°	4000 K	L0122341 .02 .05 .08
120Vac	12	1120	28°	2700 K	L0122322 .02 .05 .08
120Vac	12	1200	28°	3000 K	L0122332 .02 .05 .08
120Vac	12	1280	28°	4000 K	L0122342 .02 .05 .08
120Vac	12	1120	45°	2700 K	L0122323 .02 .05 .08
120Vac	12	1200	45°	3000 K	L0122333 .02 .05 .08
120Vac	12	1280	45°	4000 K	L0122343 .02 .05 .08

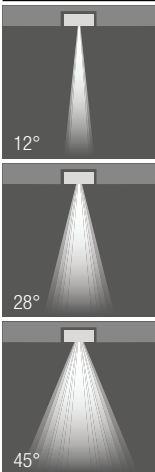

Power supply included
100 (3.93")

Finish Options

- .02 Matt white
- .05 Matt grey
- .08 Matt black

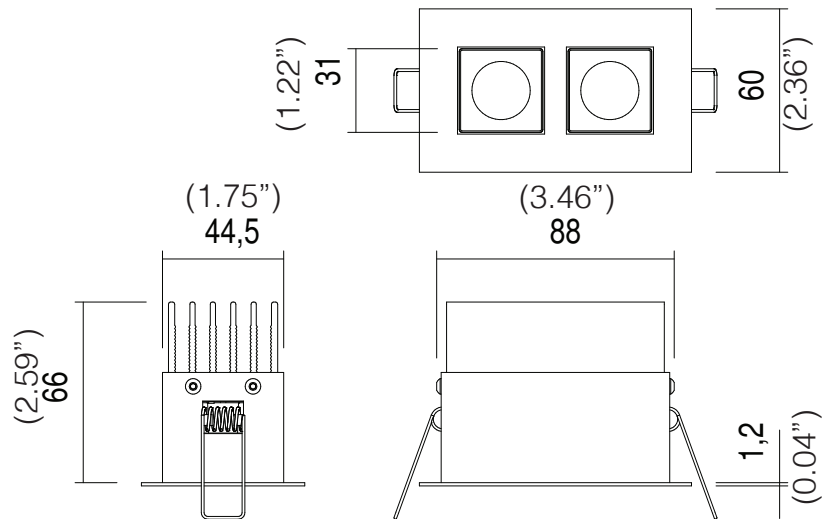

SPECIFICATION SHEET



WWW.LEDOLOGY.COM

A **Luminart** BRAND