

# MINIBRITE™

## OUTDOOR RECESSED LED

TYPE:

PROJECT NAME:

### Minibrite 1.0

CE LED MARK IP68 kg 500 kg 0,20 IK 07

Ø 30x70 mm



0,5W 12Vac - 0,6W 12Vdc - 1,2W 24Vdc

L5MB1000 I Stainless Steel

LED COLOUR OPTIC

**0** - Cool White 5000K **D** - Diffused  
**5** - Warm White 3000K  
**9** - Natural White 4000K  
**F** - Warm White 2700K



#### TECHNICAL DATA

**Application** Ideal for pathways and marker lighting  
**Installation** Outdoor recessed spotlights; recessed floor spotlights  
**Mounting** With outer casing L5WC0201; spring-loaded ferrule accessory L5WG0300 for installation on panels, plasterboard  
**Material** Body and ferrule in Stainless Steel AISI316L, outer ferrule thickness 1.5mm, tempered glass  
**Finishes available** Stainless Steel  
**N° and type of LED** 3 mid power LEDs  
**Nom. power consumption** 0,5W; 0,6W; 1,2W

**Power supply** 12/24 Vdc; 12 Vac  
**Power supply unit** Not included  
**Connection** In parallel; wired with a 1.5m neoprene cable  
**Total Delivered Lumens** 20 lm (3000K)  
**Optics** Diffused  
**LED colour** White: Warm White (2700K); Warm White (3000K); Natural White (4000K); Cool White (5000K)  
**IP** 68  
**IK** 07  
**UGR** -

#### POWER SUPPLY UNIT

0,6W - 12Vdc 1,2W - 24Vdc	N° MAX FIXTURES	PSU	IP	Page
	1...n	12 Vdc	20	479
	1...n	24 Vdc	20	479


#### OUTER CASINGS



#### ACCESSORIES




#### CABLES

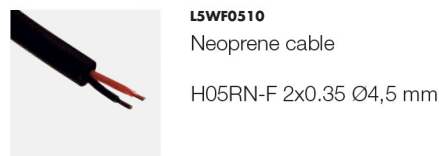

SPECIFICATION SHEET

#### PHOTOMETRIC CURVES

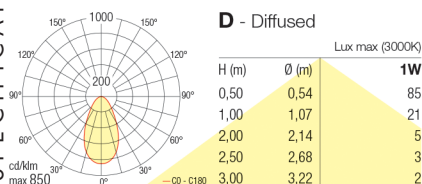

A Luminart® BRAND

WWW.LUMINARTLIGHTING.COM



LEDOLOGY®

A **Luminart** BRAND

[WWW.LUMINARTLIGHTING.COM](http://WWW.LUMINARTLIGHTING.COM)