

MINILINE™

SUSPENSION

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

Luminart®



WWW.LUMINARTLIGHTING.COM
Last updated: 09/26/24

MINILINE™

SUSPENSION

TYPE:

PROJECT NAME:

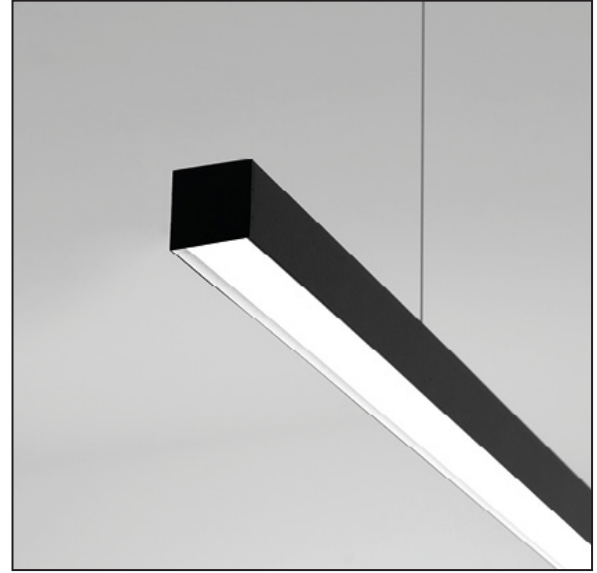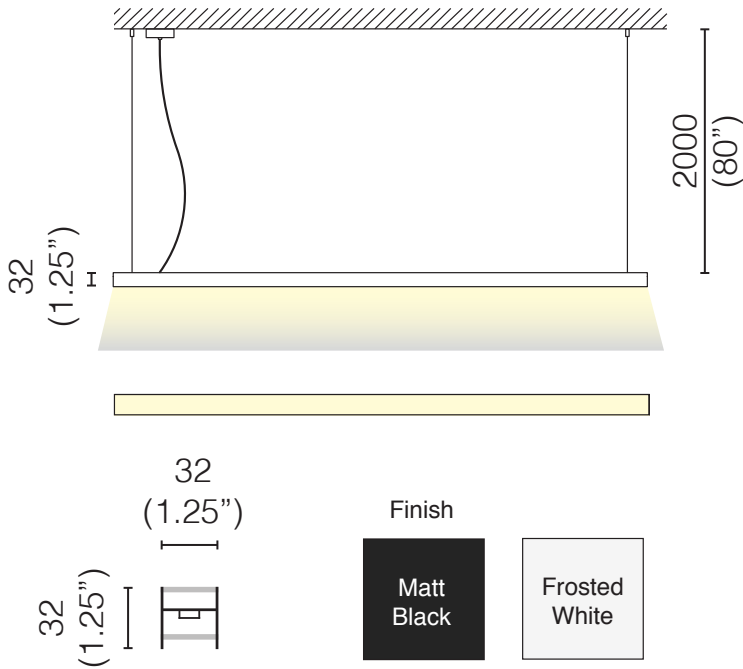

Mounting:

Supplied with 80" (2000mm) long suspension aircraft cable (standard) and canopy. To be installed on a standard 4" octogonal junction box. Custom cable length on request (Please specify).

CODE	W	Length [mm / inches]	Lm (3000K)
L25A8-610.33	33	1108 (43.62")	3300
L25A8-610.46	46	1608 (63.3")	4800
L25A8-610.54	54	1908 (75.11")	5700
L25A8-610.70	70	2508 (98.74")	7500
L25A8-610.76	76	2808 (110.55")	8400



130°



3



2700K / 3000K / 4000K



E



40



0



>90

ORDERING INFO

Model (Order Code)	Finish Options	Diffuser Options	LED	Remote Driver
<input type="radio"/> L25A8-610.33 33W	<input type="radio"/> 06: Frosted Black	<input type="radio"/> 01: Micro-prismatic PMMA	<input type="radio"/> 27: 2700K	<input type="radio"/> 120V LTE
<input type="radio"/> L25A8-610.46 46W	<input type="radio"/> 08: Frosted White	<input type="radio"/> 02: Opal	<input type="radio"/> 30: 3000K	<input type="radio"/> 120-277V 0-10V
<input type="radio"/> L25A8-610.54 54W			<input type="radio"/> 40: 4000K	
<input type="radio"/> L25A8-610.70 70W				
<input type="radio"/> L25A8-610.76 76W				

SPECIFICATION SHEET

