

MUR™











WALL/CEILING LED

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

-  (see tables)
-  TC 3000K / 4000K
-  IP 40
-  CRI 93 (>80 on request)
-  EEI A++
-  RG 1
-  08 / 02 Satin white/black
-  02 Matte black
-  08 Satin white
-  Intertek

MUR

WALL / CEILING

Subtle but powerful lines identify these wall/ceiling fixtures, which can be angled into infinite positions to enhance objects and details. Mur luminaires are made from epoxy polyester powder coated aluminium and steel. They are equipped with a high efficiency LED light source and driver. The base can be rectangular with two light sources or square-shaped with four sources. Their degree of protection against the penetration of dust, solid objects and liquids is IP40.

LEDOLOGY®

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM


MUR™


WALL/CEILING LED

TYPE:


PROJECT NAME:


MUR Ø120

CODE	W	Lm (3000K)	
L25A4-600.212	2x12	2x1615	40° (24° on request)
L25A4-600.217	2x17	2x2240	40° (24° on request)
L25A4-600.223	2x23	2x3025	40° (24° on request)

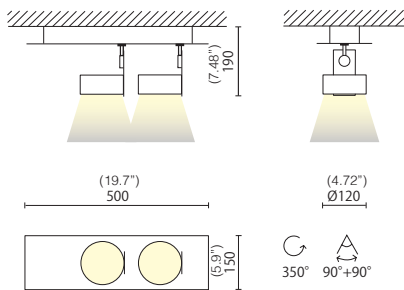

MUR Ø60

CODE	W	Lm (3000K)	
L25A4-202.2	2x9	2x1115	30°

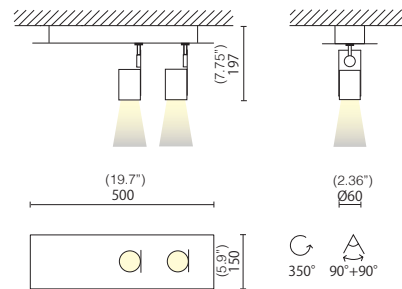

SPECIFICATION SHEET

 LEDOLGY®

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM

MUR™


WALL/CEILING LED


TYPE:

PROJECT NAME:




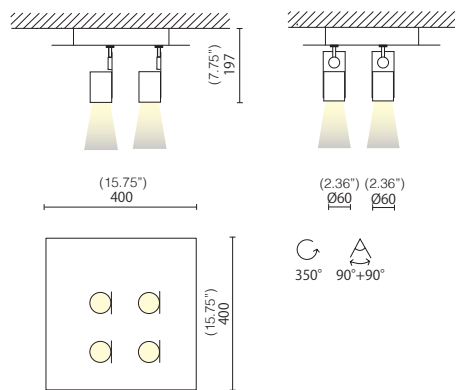
MUR Ø120

CODE	W	Lm (3000K)	
L25A4-602.412	4x12	4x1615	40° (24° on request)
L25A4-602.417	4x17	4x2240	40° (24° on request)
L25A4-602.423	4x23	4x3025	40° (24° on request)

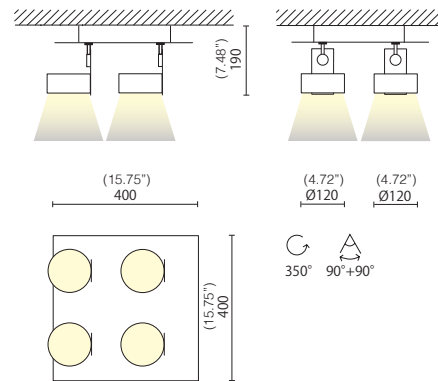

MUR Ø60

CODE	W	Lm (3000K)	
L25A4-203.4	4x9	4x1115	30°



SPECIFICATION SHEET

MUR™
WALL/CEILING LED

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

LEDOLOGY®

A **Luminart** BRAND

WWW.LUMINARTLIGHTING.COM