

# POP™ 12 RING

TYPE:

WALL

PROJECT NAME:



SPECIFICATION SHEET

**Luminart®**


WWW.LUMINARTLIGHTING.COM

# POP™ 12 RING

**TYPE:**

WALL

**PROJECT NAME:**

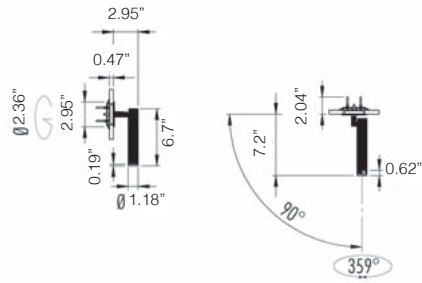


|                        |            |             |   |   |
|------------------------|------------|-------------|---|---|
| IP20                   | MC-E=3     | CE          | ▽ | ⊕ |
| 120V                   | 6W         | CRI>90      |   |   |
| <b>L17PR12.2</b> ■ S.□ |            |             |   |   |
| ■ Led color            | Nominal lm | Beam spread |   |   |
| 2 = 2700 °K            | 528        | S = 24°     |   |   |
| 3 = 3000 °K            | 552        |             |   |   |
| 4 = 4000 °K            | 594        |             |   |   |

© (m-M) Converter

- DRV.500.15 (1-1) on/off
- DRV.501.50 (1-7) DALI - Push - 1...10V (Remote installation)
- DRV.502.20 (1-3) DALI
- DRV.503.20 (1-3) Push - 1...10V
- DRV.504.10 (1-1) IGBT - Triac

| □ Frame    | Ring     |
|------------|----------|
| 02 ● Black | ● Black  |
| 06 ○ White | ○ White  |
| KC ● Black | ● Copper |
| KS ● Black | ● Brass  |
| WC ○ White | ● Copper |
| WS ○ White | ● Brass  |



Installation note: Comes with 4" round backplate to cover junction box

(m-M) = min. Led unit - Max Led unit