


POP™ Y3 TRIMLESS

RECESSED

TYPE:

PROJECT NAME:

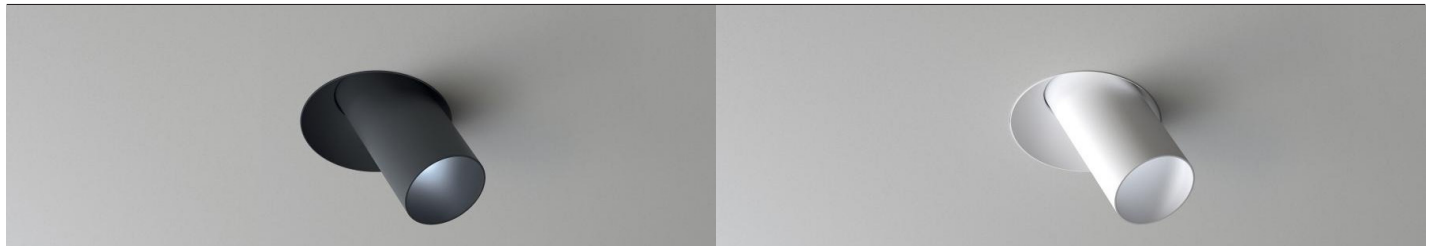

POP PY3 11W

IP40 MC-E=3

350m/A LED 11W

L173PY3.3 S.

L174PY3.3 S.

With honeycomb

Led color	Nominal lm	Beam spread
2 = 2700°K	1195	20°
3 = 3000°K	1257	
4 = 4000°K	1313	

Frame

02 Black

06 White

POP NY3 8W

IP40 MC-E=3

250m/A LED 8W CRI>90

L173NY3.3 S.

L174NY3.3 S.



With honeycomb

Led color	Nominal lm	Beam spread
2 = 2700°K	779	20°
3 = 3000°K	819	
4 = 4000°K	855	

Frame

02 Black


06 White



Pop PY3	P
3PY3.3 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> led IP40	3.7"
4PY3.3 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> led IP40 + honeycomb	3.89"

Pop NY3	P
3NY3.3 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> led IP40	3.14"
4NY3.3 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> led IP40 + honeycomb	2.87"

Mud Kit for Plaster
L171Z00.080.01
Ø 9.5 cm



SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Finish	LED	Remote Driver Options
	<input type="radio"/> 02 Black	<input type="radio"/> 2700K	<input type="radio"/> 120V Phase Dimming
	<input type="radio"/> 06 White	<input type="radio"/> 3000K	<input type="radio"/> 120V 0-10V Dimming
	<input type="radio"/> C1 Copper Anodized	<input type="radio"/> 4000K	<input type="radio"/> 277V 0-10V Dimming
	<input type="radio"/> S1 Brass Anodized		



Luminart®

WWW.LUMINARTLIGHTING.COM