

# RADIUS™ 360

POLE

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

# RADIUS™ 360

POLE

TYPE:



PROJECT NAME:



## Technical information:

Installation:	Pole Ø60 (2.36")
Material:	Aluminum
Treatment:	Treatment
Diffuser type:	Transparent glass
Lamp type:	LED
Energy performance class:	D
CRI:	>80
LB Factor:	LM90B10 - 60.000
Power consumption (Watt):	52
Lumen:	6100
Type of protection:	<b>IP 65</b>

Recommended for installation on Ø 60 (2.36") metal poles. Not suitable for Still poles.

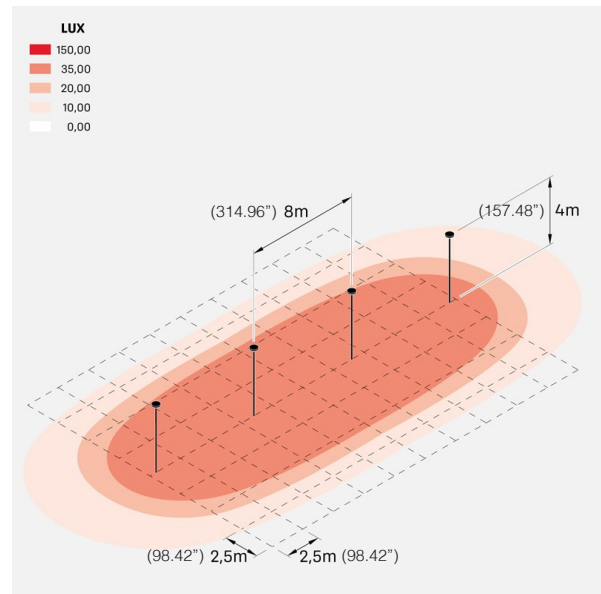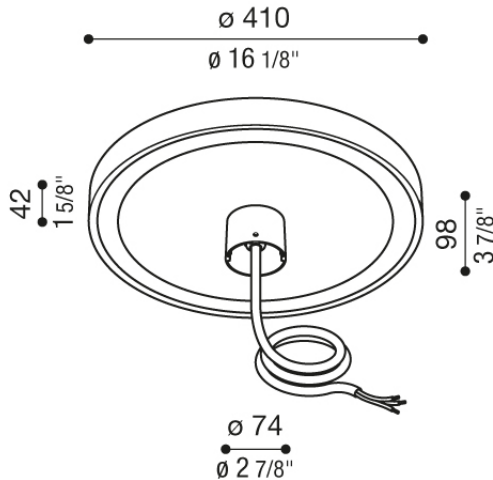

SPECIFICATION SHEET

## ORDERING INFO

Model (Order Code)	Structure Finish	LED	Dimming Options
<input type="radio"/> L53 RADIUS 360	<input type="radio"/> B: Black RAL 9005 <input type="radio"/> G: Grey RAL 9006 <input type="radio"/> A: Anthracite RAL 7021 <input type="radio"/> C: Corten RAL 8003	<input type="radio"/> 2200K <input type="radio"/> 2700K <input type="radio"/> 3000K <input type="radio"/> 4000K	<input type="radio"/> 120V LTE <input type="radio"/> 120V 0-10V <input type="radio"/> 277V 0-10V



**Luminart®**

WWW.LUMINARTLIGHTING.COM  
Last updated: 04/22/24