

RAIL™ BIEMISSION

MODULAR SUSPENSION

TYPE:

PROJECT NAME:

L671545



1,3 kg

.01 White

/W LED 37,5W 1999lm up light + 3000lm down light 4000K CRI>90

/WW LED 37,5W 1982lm up light + 2975lm down light 3000K CRI>90

/XW LED 37,5W 1791lm up light + 2687lm down light 2700K CRI>90

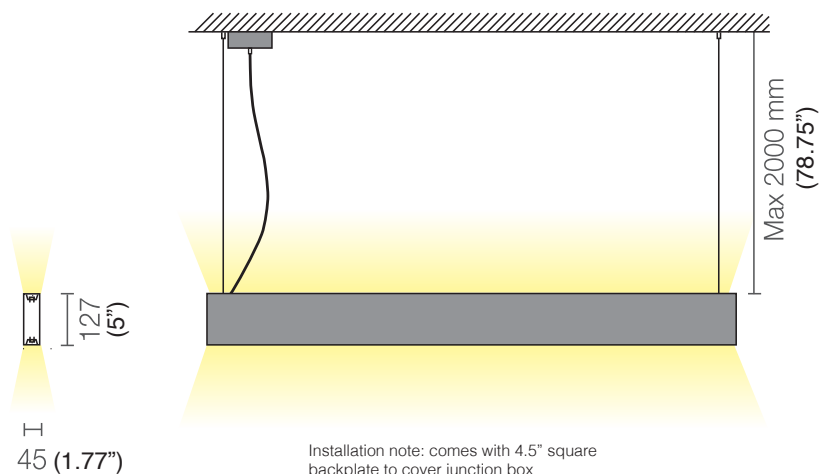

CUSTOM SIZE

Table of available lengths. Measures are referred to complete fixtures including closing heads.

LED source 18W/mt CRI>90

L cm.	watt	2700K (XW)	lm up	down	3000K (WW)	lm up	down	4000K (W)	lm up	down
127	37,5W	1545.01/XW	1791	2687	1545.01/WW	1982	2975	1545.01/W	1999	3000
152	45W	A1545.01/150/XW	2150	3225	A1545.01/150/WW	2380	3570	A1545.01/150/W	2400	3600
177	55,5W	A1545.01/175/XW	2866	3762	A1545.01/175/WW	3173	4165	A1545.01/175/W	3200	4200
202	60W	A1545.01/200/XW	2866	4300	A1545.01/200/WW	3173	4760	A1545.01/200/W	3200	4800
227	67,5W	A1545.01/225/XW	3225	4837	A1545.01/225/WW	3570	5355	A1545.01/225/W	3600	5400
252	75W	A1545.01/250/XW	3583	5375	A1545.01/250/WW	3966	5950	A1545.01/250/W	4000	6000
277	82,5W	A1545.01/275/XW	3941	5912	A1545.01/275/WW	4363	6545	A1545.01/275/W	4400	6600
302	93W	A1545.01/300/XW	4658	6450	A1545.01/300/WW	5156	7140	A1545.01/300/W	5200	7200

The product code refers to the complete lamp.

Ceiling rose with cable, 2 closing heads and polycarbonate satin diffuser are included.

1 cm = 0.3937 inches

SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM