

RETTA™ 200


CEILING / WALL

TYPE:

PROJECT NAME:



materials:	aluminum body, opal polycarbonate diffuser
light:	direct-diffuse
light source:	<i>/XW</i> LED 24V 36W 3780lm 2700K <i>/WW</i> LED 24V 36W 4040lm 3000K <i>/W</i> LED 24V 36W 4520lm 4000K
life:	> 30.000 h
step MacAdam:	3
CRI:	>90
IP	20
net weight:	1,00 Kg
finishing:	.01 white .02 black .35 sand
symbols:	IP40

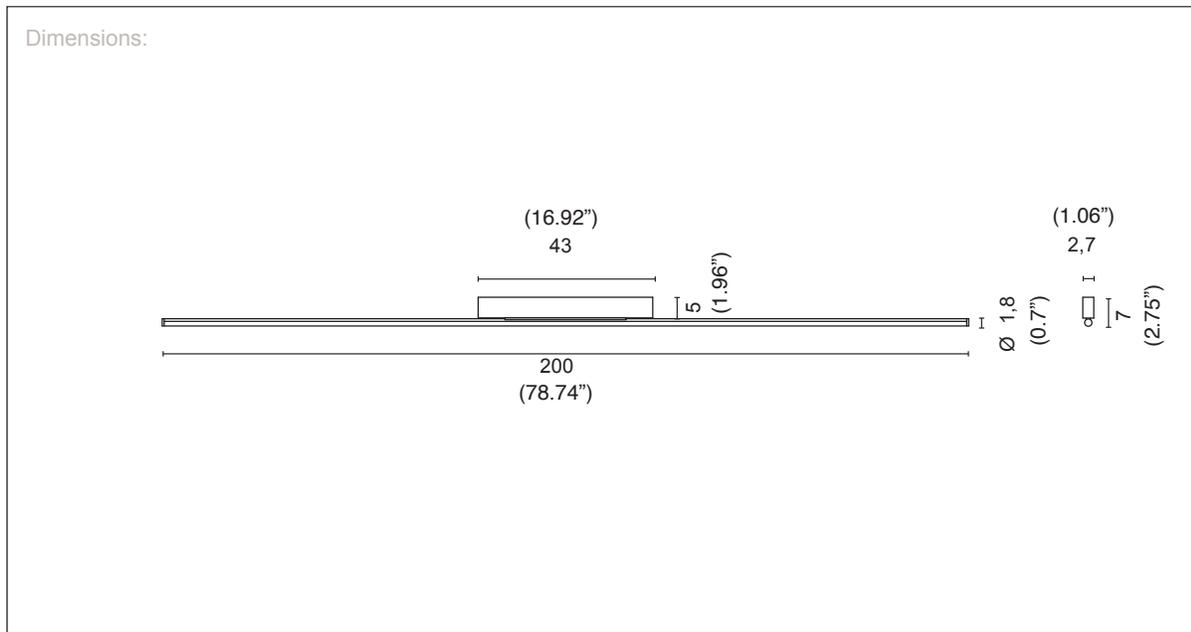

SPECIFICATION SHEET

ORDERING INFO

L675694

Model (Order Code)	Structure Finishes	LED	Driver Options
<input type="radio"/> L675694 36W	<input type="radio"/> 01: White <input type="radio"/> 02: Black <input type="radio"/> 35: Sand	<input type="radio"/> XW: 2700K <input type="radio"/> WW: 3000K <input type="radio"/> W: 4000K	<input type="radio"/> 120V LTE <input type="radio"/> 120V-277V 0-10V

Installation Note: Fixture comes with a 4" backplate that mounts to a standard junction box.



RETTA™ 250


CEILING / WALL

TYPE:

PROJECT NAME:



materials:	aluminum body, opal polycarbonate diffuser
light:	direct-diffuse
light source:	<i>/XW</i> LED 24V 45W 4725lm 2700K <i>/WW</i> LED 24V 45W 5050lm 3000K <i>/W</i> LED 24V 45W 5650lm 4000K
life:	> 30.000 h
step MacAdam:	3
CRI:	>90
IP	20
net weight:	1,00 Kg
finishing:	.01 white .02 black .35 sand
symbols:	IP40

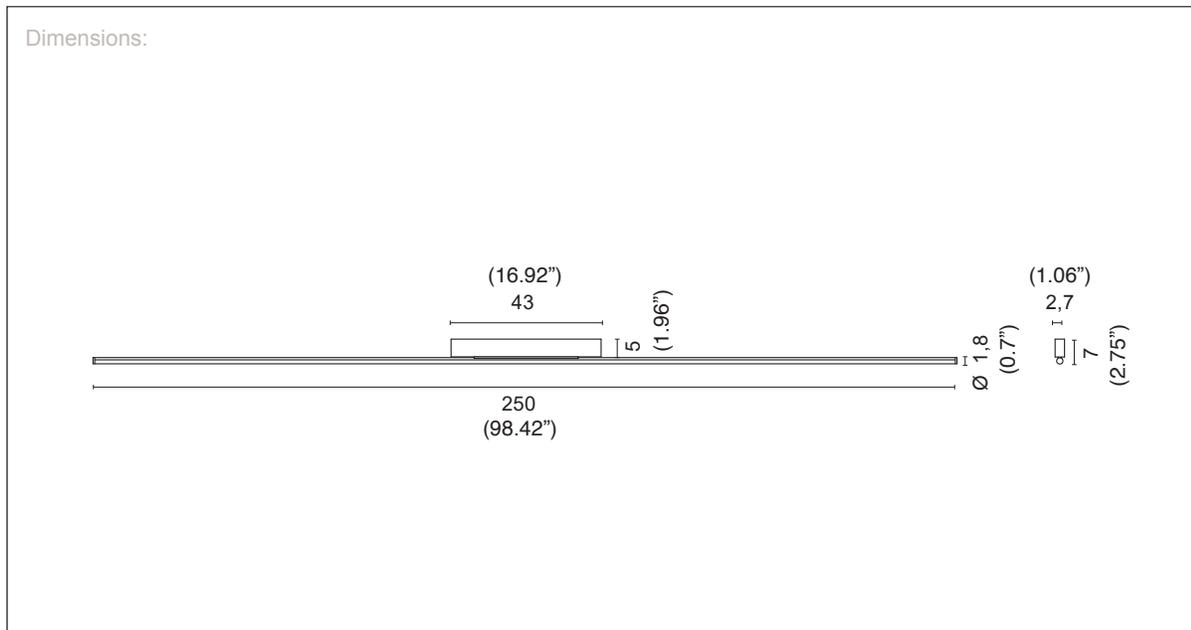

SPECIFICATION SHEET

ORDERING INFO			
Model (Order Code)	Structure Finishes	LED	Driver Options
L675695 45W	<input type="radio"/> 01: White <input type="radio"/> 02: Black <input type="radio"/> 35: Sand	<input type="radio"/> XW: 2700K <input type="radio"/> WW: 3000K <input type="radio"/> W: 4000K	<input type="radio"/> 120V LTE <input type="radio"/> 120V-277V 0-10V

Installation Note: Fixture comes with a 4" backplate that mounts to a standard junction box.



RETTA™ 300


CEILING / WALL

TYPE:

PROJECT NAME:



materials:	aluminum body, opal polycarbonate diffuser						
light:	direct-diffuse						
light source:	<table border="0"> <tr> <td>/XW</td> <td>LED 24V 54W 5670lm 2700K</td> </tr> <tr> <td>/WW</td> <td>LED 24V 54W 6060lm 3000K</td> </tr> <tr> <td>/W</td> <td>LED 24V 54W 6780lm 4000K</td> </tr> </table>	/XW	LED 24V 54W 5670lm 2700K	/WW	LED 24V 54W 6060lm 3000K	/W	LED 24V 54W 6780lm 4000K
/XW	LED 24V 54W 5670lm 2700K						
/WW	LED 24V 54W 6060lm 3000K						
/W	LED 24V 54W 6780lm 4000K						
life:	> 30.000 h						
step MacAdam:	3						
CRI:	>90						
IP	20						
net weight:	1,00 Kg						
finishing:	<table border="0"> <tr> <td>.01</td> <td>white</td> </tr> <tr> <td>.02</td> <td>black</td> </tr> <tr> <td>.35</td> <td>sand</td> </tr> </table>	.01	white	.02	black	.35	sand
.01	white						
.02	black						
.35	sand						
symbols:	IP40						

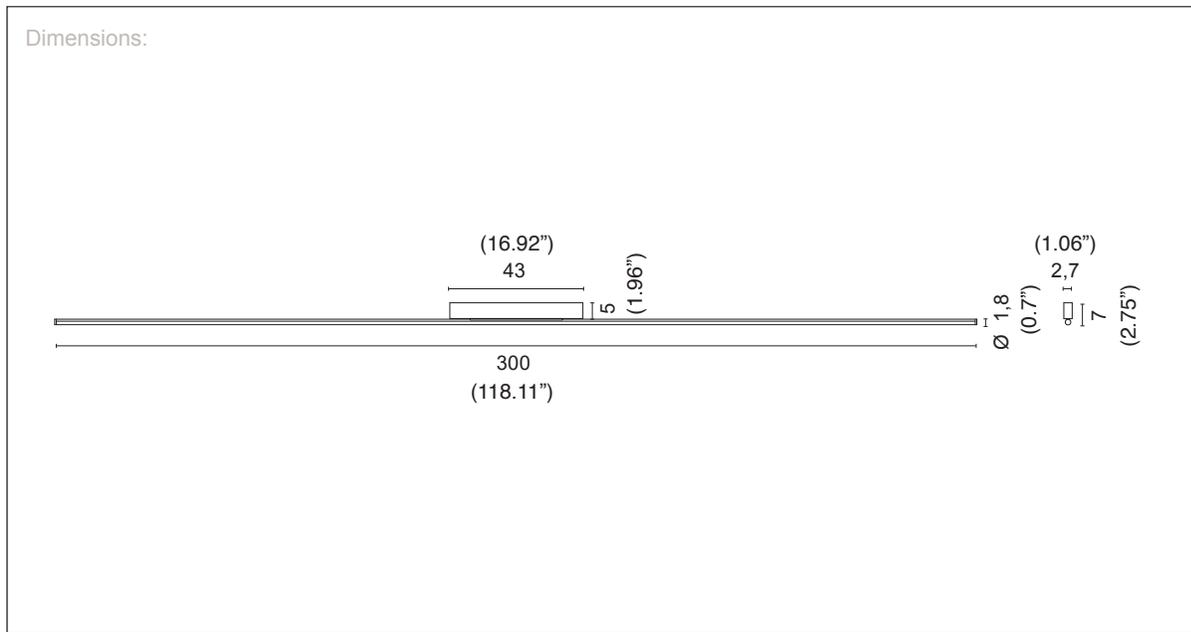

SPECIFICATION SHEET

ORDERING INFO

L675696

Model (Order Code)	Structure Finishes	LED	Driver Options
<input type="radio"/> L675696 54W	<input type="radio"/> 01: White <input type="radio"/> 02: Black <input type="radio"/> 35: Sand	<input type="radio"/> XW: 2700K <input type="radio"/> WW: 3000K <input type="radio"/> W: 4000K	<input type="radio"/> 120V LTE <input type="radio"/> 120V-277V 0-10V

Installation Note: Fixture comes with a 4" backplate that mounts to a standard junction box.

