

REVERSE™

SUSPENSION

TYPE:

PROJECT NAME:

Finish

Fabric options:



Cotton



Pleated



Pleated Ribbon

Fabric lampshade,
diffuser in PMMA



IP20

SPECIFICATION SHEET



**



*



* on demand

** cable on measure



Canopy detail

Luminart®

WWW.LUMINARTLIGHTING.COM
Last updated: 11/10/20

REVERSE™

SUSPENSION


TYPE:

PROJECT NAME:

Diffuser finishes



Cotton



Cod. 300
Ivory



Cod. 301
White



Cod. 302
Sand



Cod. 303
Golden yellow



Cod. 315
Orange



Cod. 328
Gourd



Cod. 305
Lobate pink



Cod. 306
Red



Cod. 327
Lavender



Cod. 320
Mallow



Cod. 321
Periwinkle



Cod. 326
Navy blue



Cod. 319
Teal



Cod. 316
Green



Cod. 323
Sage



Cod. 318
Moss



Cod. 317
Dove colour



Cod. 324
Ecrú



Cod. 314
Brown



Cod. 312
Grey



Cod. 310
Anthracite



Cod. 313
Black

REVERSE™

SUSPENSION

TYPE:

PROJECT NAME:

Diffuser Finishes



Pleated



Cod. 500
White



Cod. 513
Ivory



Cod. 501
Beige



Cod. 511
Orange



Cod. 504
Flame red



Cod. 512
Dark red



Cod. 520
Electric blue



Cod. 515
Military



Cod. 514
Hazel



Cod. 505
Brown



Cod. 516
Dark brown



Cod. 517
Red brick



Cod. 509
Light grey



Cod. 519
Dark grey



Cod. 510
Anthracite




Cod. 502
Black



Pleated Ribbon



Cod. 700
Ivory



Cod. 704
Ecrú



Cod. 701
Leather



Cod. 705
Yellow



Cod. 710
Terracotta



Cod. 711
Grey



Cod. 708
Cast Iron

REVERSE™

SUSPENSION

TYPE:

PROJECT NAME:

Reverse Small A - ø 60	ø 60 x 18 cm 5 Kg	lamp type 1 led module 19.3W luminous efficacy 2900 Lm light colour 2700 K cri >80	L82REAESO060C04
Reverse Small B - ø 60	ø 60 x 18 cm 5 Kg	lamp type 1 led module 19.3W luminous efficacy 2900 Lm light colour 2700 K cri >80	L82REBESO060C04
Reverse Large A - ø 80	ø 80 x 24 cm 7 Kg	lamp type 1 led module 29.3W luminous efficacy 3900 Lm light colour 2700 K cri >80	L82REAESO080C07
Reverse Large B - ø 80	ø 80 x 24 cm 7 Kg	lamp type 1 led module 29.3W luminous efficacy 3900 Lm light colour 2700 K cri >80	L82REBESO080C07

ORDERING INFO


Model (Order Code)	Finish	LED	Voltage	Dimming
		<input type="radio"/> 2700K	<input type="radio"/> 120V	<input type="radio"/> LTE (Leading/Trailing Edge Dim)
		<input type="radio"/> 3000K	<input type="radio"/> 277V	<input type="radio"/> 0-10V (0-10V)
		<input type="radio"/> 4000K		



Intertek

Fixture comes with a 4" backplate that mounts to a standard junction box. Please note: 277V is only compatible with 0-10V dimming.

SPECIFICATION SHEET

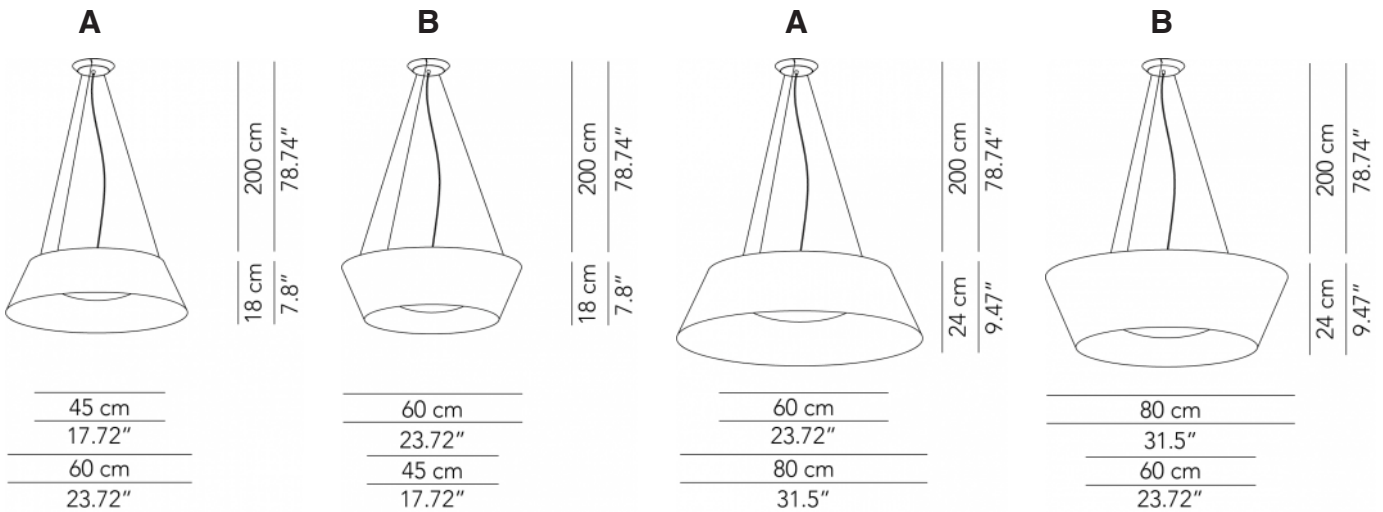

Luminart®

WWW.LUMINARTLIGHTING.COM
Last updated: 11/10/20