

RITMO™

WALL

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

Luminart®


WWW.LUMINARTLIGHTING.COM
Last updated: 12/13/23

RITMO™ 1800

WALL

TYPE:

PROJECT NAME:

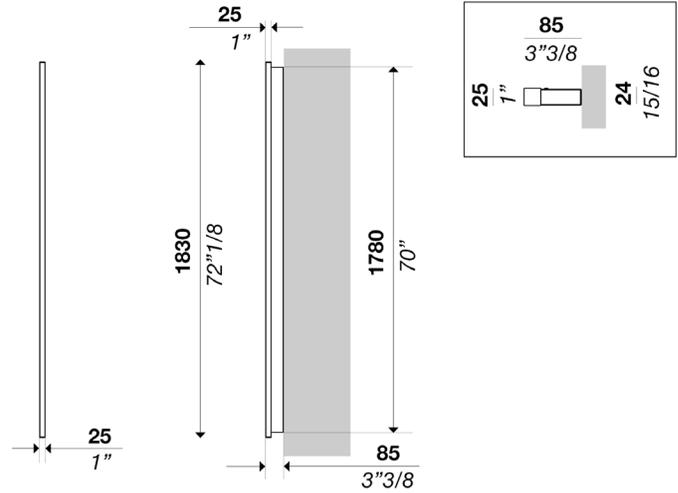

Wall lamp with direct frontal light. Aluminum structure matt white, black or brass coated. Opal polycarbonate or transparent prismatic diffuser. Strip LED.

Power input: 43W

Light emission direction: Direct frontal

Materials: Aluminum structure, opal transparent polycarbonate or transparent prismatic PMMA diffuser

Electrical: High efficiency electronic power supply, rated 50,000 hours 120V-277V

Dimming: LTE phase dimming or 0-10V

Diffuser options: Opal, transparent prismatic



Structure finish: Matt white, matt black, brass



Light source: LED
3000K: 90CRI
4000K: 90CRI

Degree of protection: IP20

Source lumens: 6407 lm

Delivered lumens: 4434 lm

Source efficacy: 149 lm/W

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Structure Finish	Diffuser Options	LED	Driver Options
<input type="radio"/> L032570101S20100	<input type="radio"/> Matt White <input type="radio"/> Matt Black <input type="radio"/> Brass	<input type="radio"/> Opal <input type="radio"/> Transparent prismatic	<input type="radio"/> 3000K <input type="radio"/> 4000K	<input type="radio"/> 120V Phase Dimming <input type="radio"/> 120V 0-10V Dimming <input type="radio"/> 277V 0-10V Dimming



Luminart®



WWW.LUMINARTLIGHTING.COM
Last updated: 12/13/23

RITMO™ 2300

WALL

TYPE:

PROJECT NAME:

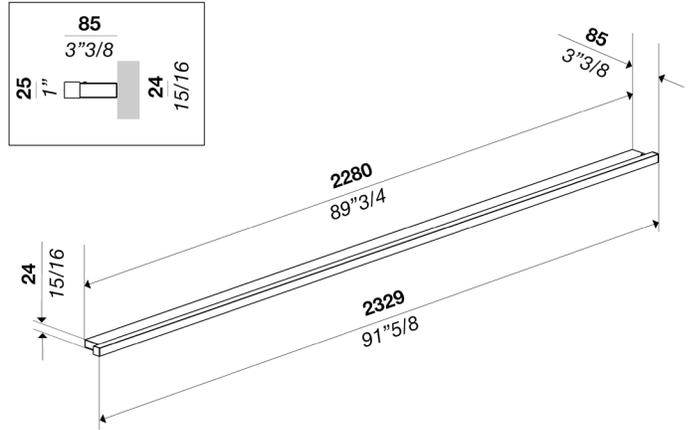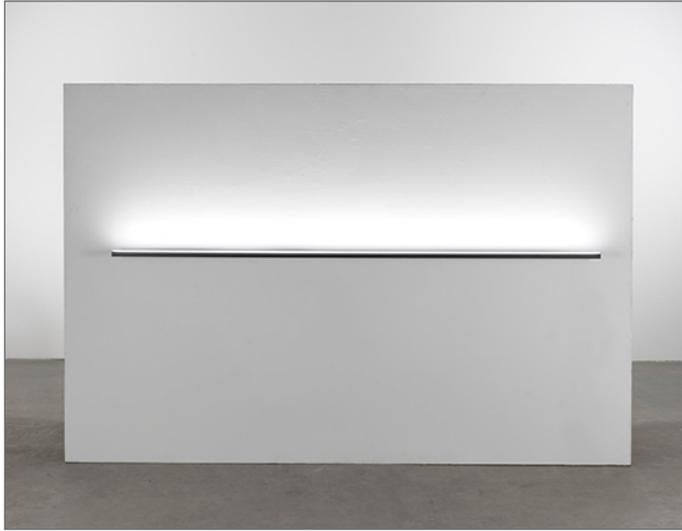

Wall lamp with direct frontal light. Aluminum structure matt white, black or brass coated. Opal polycarbonate or transparent prismatic diffuser. Strip LED.

Power input: 55W

Light emission direction: Indirect

Materials: Aluminum structure, opal transparent polycarbonate or transparent prismatic PMMA diffuser

Electrical: High efficiency electronic power supply, rated 50,000 hours 120V-277V

Dimming: LTE phase dimming or 0-10V

Diffuser options: Opal, transparent prismatic



Structure finish: Matt white, matt black, brass



Light source: LED
3000K: 90CRI
4000K: 90CRI

Degree of protection: IP20

Source lumens: 8195 lm

Delivered lumens: 5635 lm

Source efficacy: 149 lm/W

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Structure Finish	Diffuser Options	LED	Driver Options
<input type="radio"/> L032570103S20100	<input type="radio"/> Matt White <input type="radio"/> Matt Black <input type="radio"/> Brass	<input type="radio"/> Opal <input type="radio"/> Transparent prismatic	<input type="radio"/> 3000K <input type="radio"/> 4000K	<input type="radio"/> 120V Phase Dimming <input type="radio"/> 120V 0-10V Dimming <input type="radio"/> 277V 0-10V Dimming

