


TYPE:

## **PROJECT NAME:**



# **ROXX<sup>™</sup> 150** SUSPENSION

## **PROJECT NAME:**

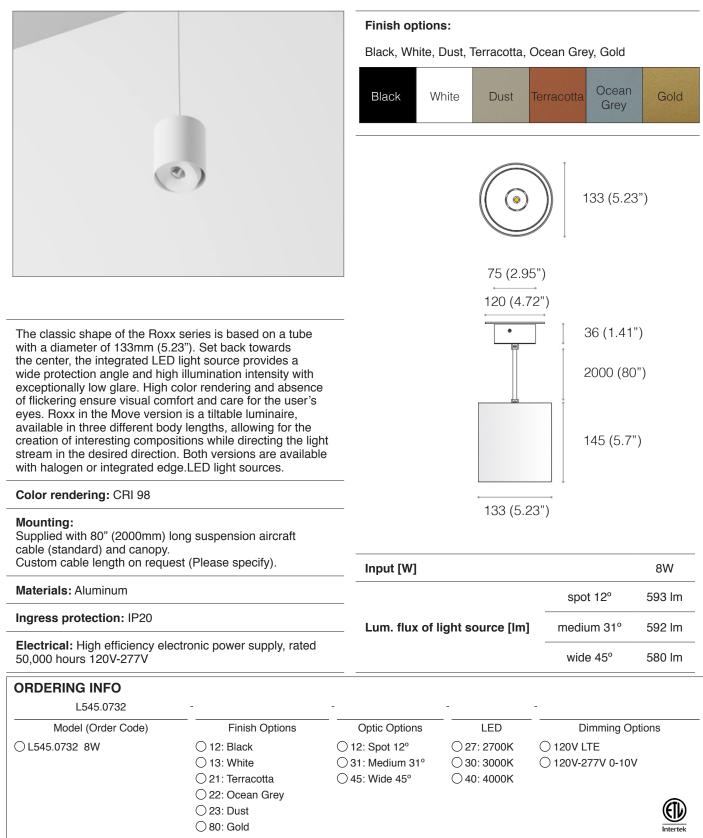

SHEET


PECIFICATION

ഗ

#### WWW.LUMINARTLIGHTING.COM Last updated: 12/11/24

# ROXX<sup>TM</sup> 230 SUSPENSION

## **PROJECT NAME:**

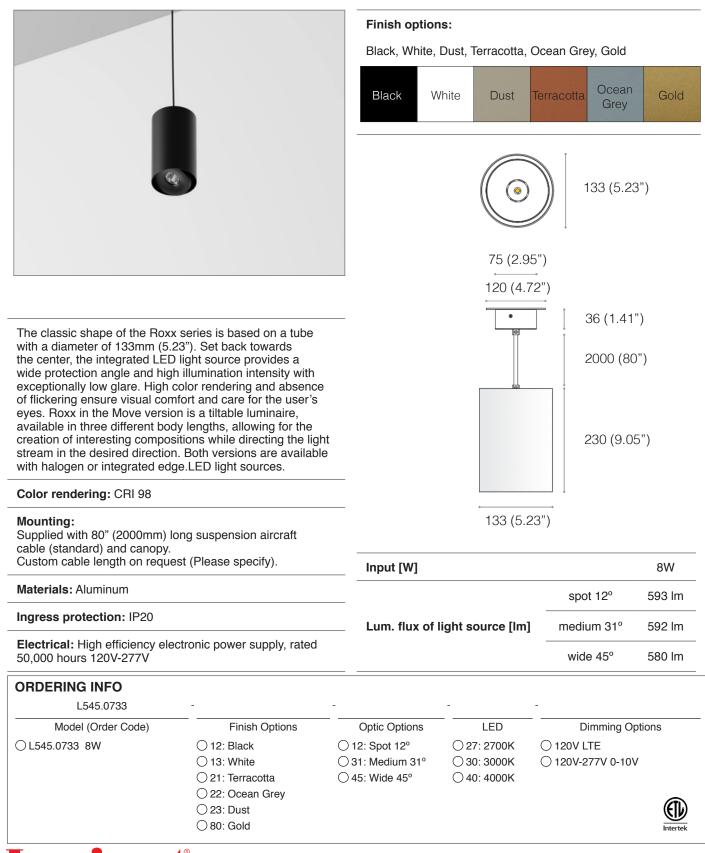

ഗ

#### WWW.LUMINARTLIGHTING.COM Last updated: 12/11/24

# ROXX<sup>TM</sup> 330 SUSPENSION

## **PROJECT NAME:**

		Finish option	Finish options:			
		Black, White,	Black, White, Dust, Terracotta, Ocean Grey, Gold			
		Black V	Vhite Dust	Terracotta Ocean Grey	Gold	
0	>			133 (5.2	3")	
			75 (2.95	ō")		
			120 (4.7	2")		
			•	36 (1.41	")	
The classic shape of the Roxx series is based on a tube with a diameter of 133mm (5.23"). Set back towards the center, the integrated LED light source provides a wide protection angle and high illumination intensity with exceptionally low glare. High color rendering and absence of flickering ensure visual comfort and care for the user's eyes. Roxx in the Move version is a tiltable luminaire, available in three different body lengths, allowing for the creation of interesting compositions while directing the light stream in the desired direction. Both versions are available with halogen or integrated edge.LED light sources.				2000 (8	)")	
				330 (12	.99")	
Color rendering: CRI 98						
<b>Mounting:</b> Supplied with 80" (2000mm) long suspension aircraft cable (standard) and canopy. Custom cable length on request (Please specify).			133 (5.2	3")		
	(Please specify).	Input [W]			8W	
Materials: Aluminum				spot 12°	593 lm	
Ingress protection: IP20 Electrical: High efficiency electronic power supply, rated 50,000 hours 120V-277V		Lum. flux of	light source [Im]	medium 31°	592 lm	
				wide 45°	580 lm	
ORDERING INFO						
L545.0734	-	-	-	-		
Model (Order Code)	Finish Options	Optic Options	LED	Dimming C	ptions	
〕L545.0734 8W	<ul> <li>12: Black</li> <li>13: White</li> <li>21: Terracotta</li> </ul>	<ul> <li>12: Spot 12°</li> <li>31: Medium 31°</li> <li>45: Wide 45°</li> </ul>	<ul> <li>○ 27: 2700K</li> <li>○ 30: 3000K</li> <li>○ 40: 4000K</li> </ul>	○ 120V LTE ○ 120V-277V 0-10	V	
	<ul> <li>○ 22: Ocean Grey</li> <li>○ 23: Dust</li> </ul>				A	

## - WWW.LUMINARTLIGHTING.COM Last updated: 12/11/24

**TYPE:** 

## **PROJECT NAME:**



- WWW.LUMINARTLIGHTING.COM Last updated: 12/11/24

Luminart<sup>®</sup>