TYPE:

PROJECT NAME:



Round pendant light with shade diameter Ø400mm (15.74"). Product consists of cableless pendant and opal polycarbonate shade. Shade is fixed by two-step clamp holders. Suitable for indoor use.

Power input: 27W

Mounting: 72" adjustable air craft cable and one canopy. Installs on a standard 4" junction box.

Shade: Opal polycarbonate


Electrical: High efficiency electronic power supply, rated 50,000 hours 120V-277V

Dimming: Power supply compatible with 0-10V (D10) or LTE phase dimming (TRIAC).

Finish: White

SH

Base material: Steel

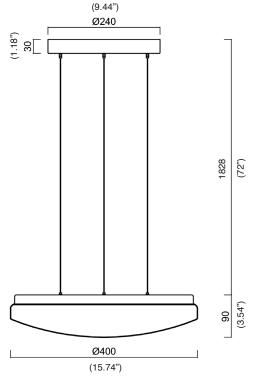

Come with 72" air craft suspension cable, longer cable on request.

Source: LED module

3000K: 80CRI 4000K: 80CRI

Lumen maintenance: >80% of initial lumens at 50,000h

	Input [W]	Lum. flux of light source [lm]		Lum. flux of luminaire [lm]	
		3000K	4000K	3000K	4000K
	27	3690	3890	2400	2530

ORDERING INFO SPECIFICATION Model (Order Code) Structure Finish LED **Driver Options** OL74SAGITALE2 27W ○ White Ral9003 ○3000K ◯120V LTE O4000K O 120-277V 0-10V



