SHARP

CEILING/WALL

TYPE:

PROJECT NAME:

SPECIFICATION SHEET

SHARP

CEILING/WALL

TYPE:

PROJECT NAME:

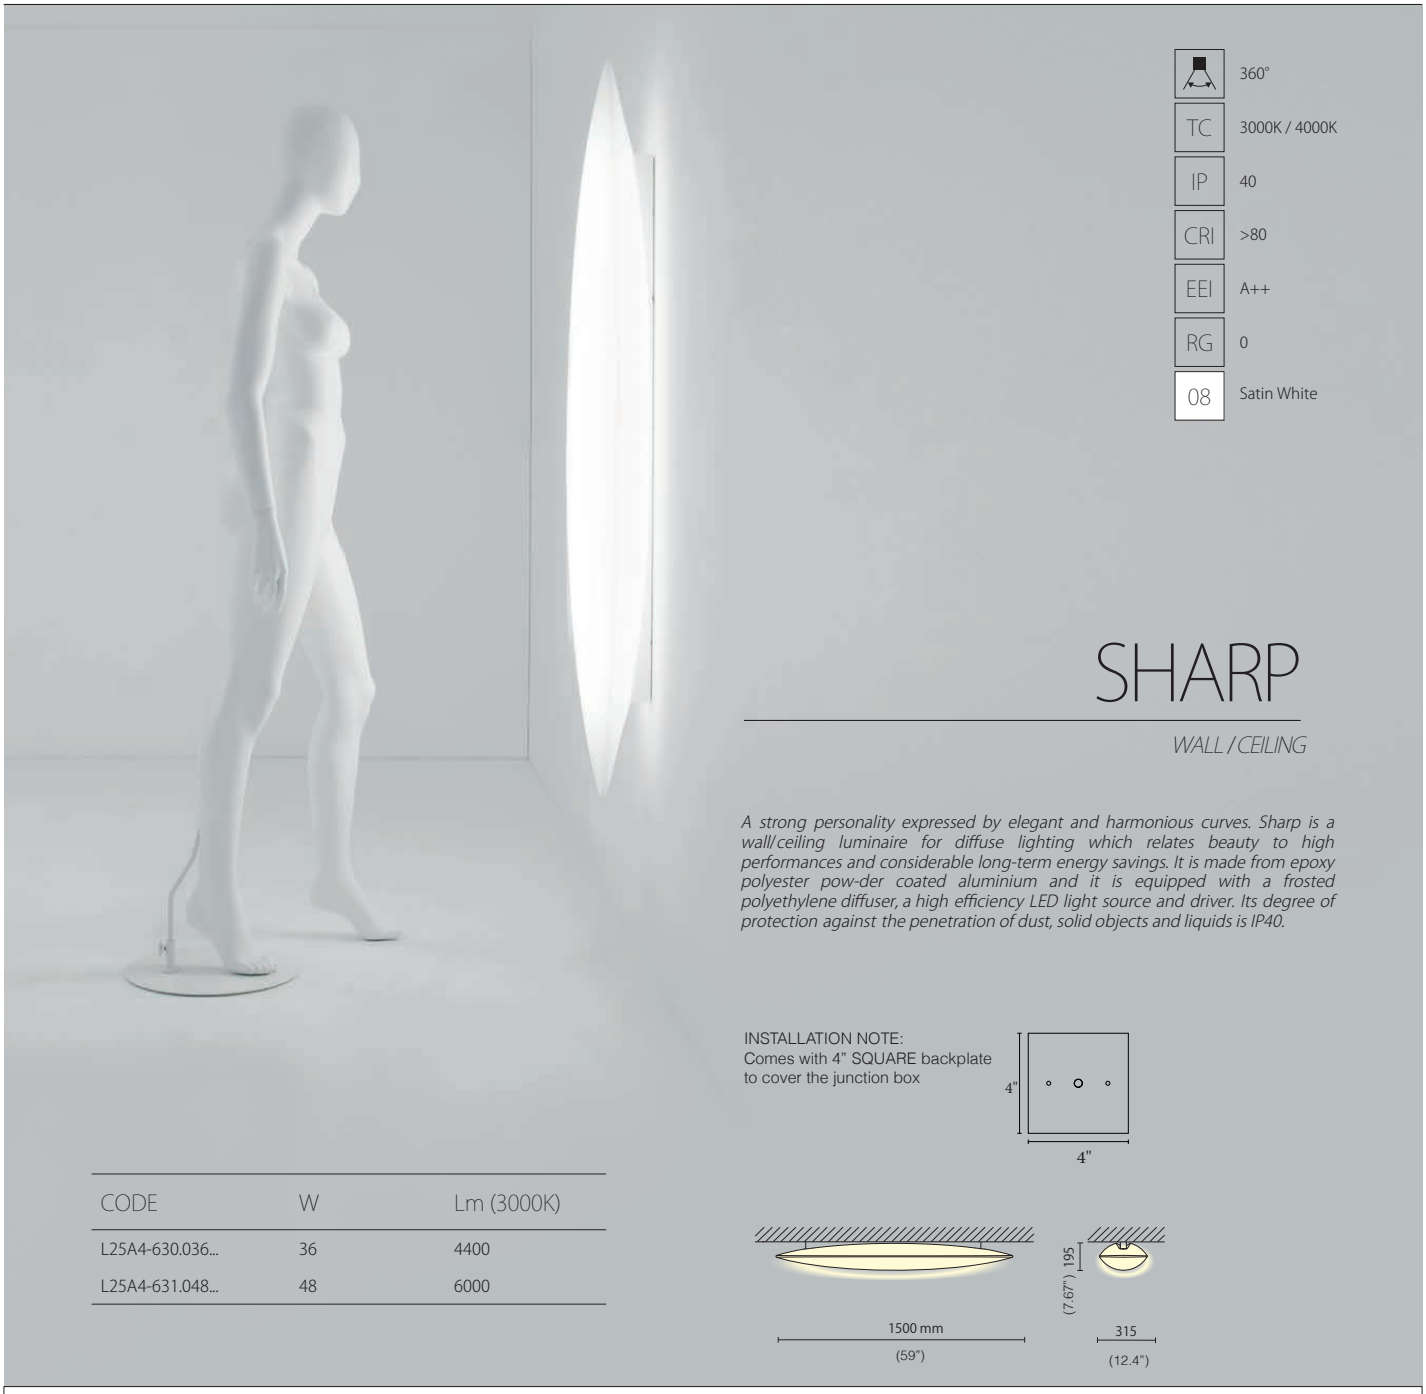

360°	
TC	3000K / 4000K
IP	40
CRI	>80
EEI	A++
RG	0
08	Satin White

SHARP

WALL / CEILING

A strong personality expressed by elegant and harmonious curves. Sharp is a wall/ceiling luminaire for diffuse lighting which relates beauty to high performances and considerable long-term energy savings. It is made from epoxy polyester pow-der coated aluminium and it is equipped with a frosted polyethylene diffuser, a high efficiency LED light source and driver. Its degree of protection against the penetration of dust, solid objects and liquids is IP40.

INSTALLATION NOTE:
Comes with 4" SQUARE backplate to cover the junction box

CODE	W	Lm (3000K)
L25A4-630.036...	36	4400
L25A4-631.048...	48	6000

ORDERING INFO

Model (Order Code)	Finish	LED	Driver Options
	◯ 08 Satin White	◯ 3000K ◯ 4000K	◯ 120V Phase Dimming ◯ 120V 0-10V Dimming ◯ 277V 0-10V Dimming

Intertek

SPECIFICATION SHEET