


SILVIO™

BOLLARD

TYPE:

PROJECT NAME:

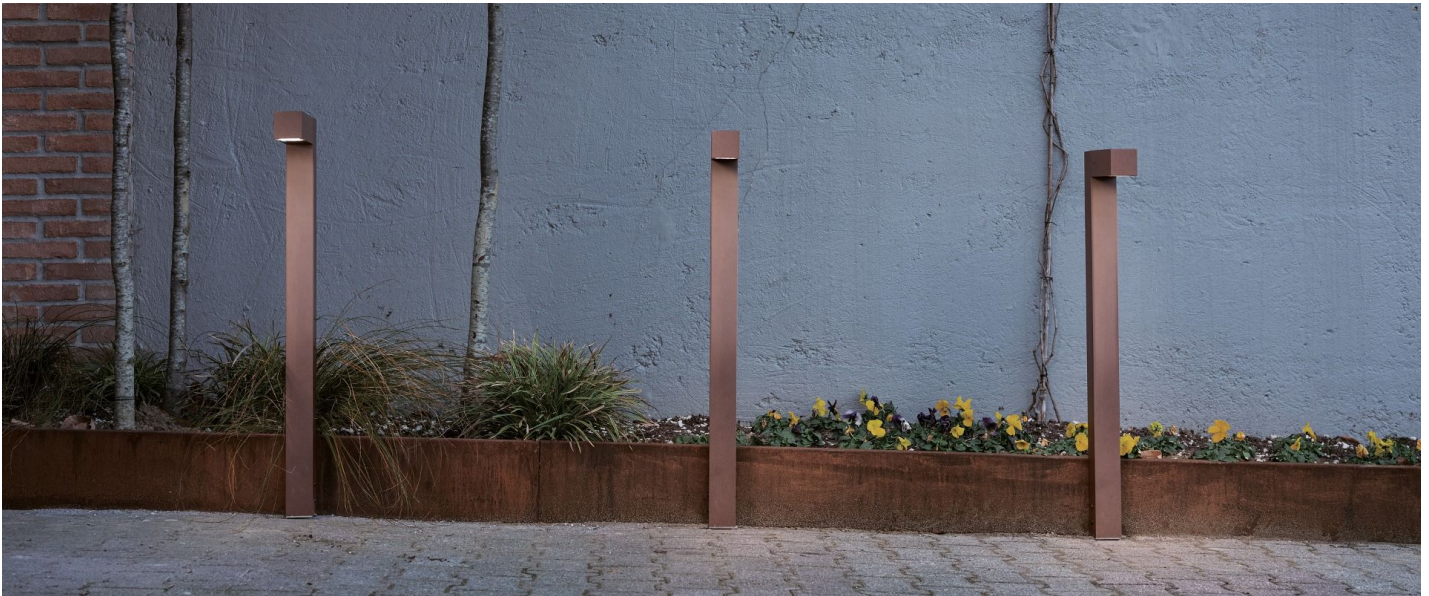


SPECIFICATION SHEET

SILVIO™

BOLLARD


TYPE:

PROJECT NAME:

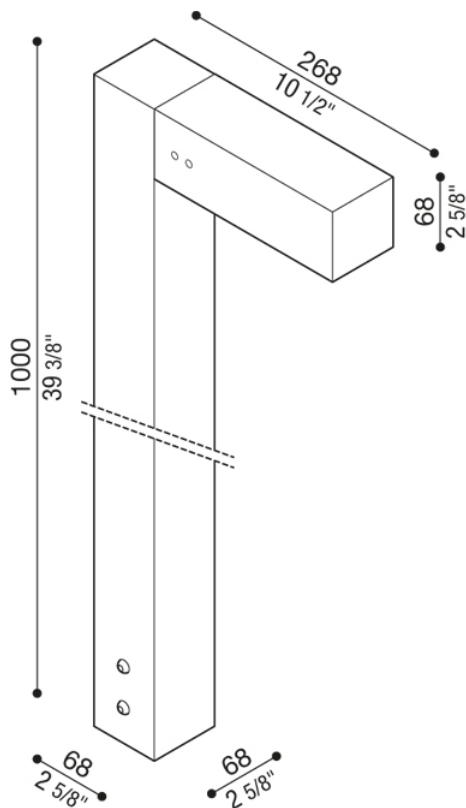

Technical information:

Installation:	Ground
Material:	Aluminum
Treatment:	Sea Treatment
Diffuser type:	Etched Glass
CRI:	>80
LB Factor:	L80B50 - 50.000h
Power consumption [Watt]	10
Source Lumen:	1350 lm
Delivered Lumen:	855 lm
Type of protection:	IP66

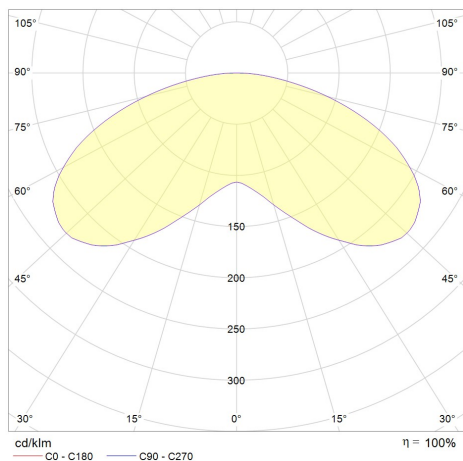

H1000mm (39.37") pole and fixing base included.


SPECIFICATION SHEET

ORDERING INFO


Model (Order Code)	Structure Finish	Optic Options	LED	Dimming Options
<input type="radio"/> L53 SILVIO BOLLARD	<input type="radio"/> BL: Black RAL 9005 <input type="radio"/> CO: Corten <input type="radio"/> DG: Dark Grey RAL 7021 <input type="radio"/> WH: White RAL 9010	<input type="radio"/> S: 30° <input type="radio"/> W: Wide <input type="radio"/> A: Asymmetric <input type="radio"/> D: Diffuse	<input type="radio"/> 2700K <input type="radio"/> 3000K <input type="radio"/> 4000K	<input type="radio"/> 120V LTE <input type="radio"/> 120V 0-10V <input type="radio"/> 277V 0-10V




Luminart®

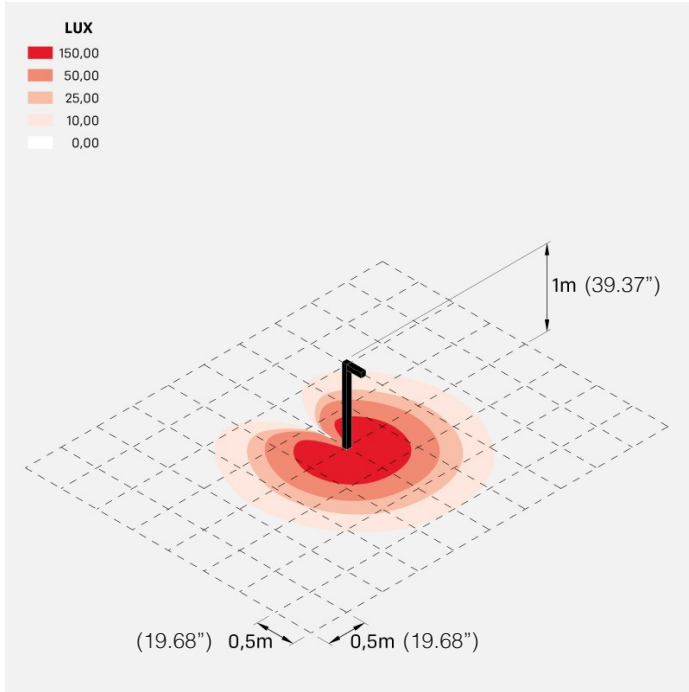


silvio 200_bollard_s

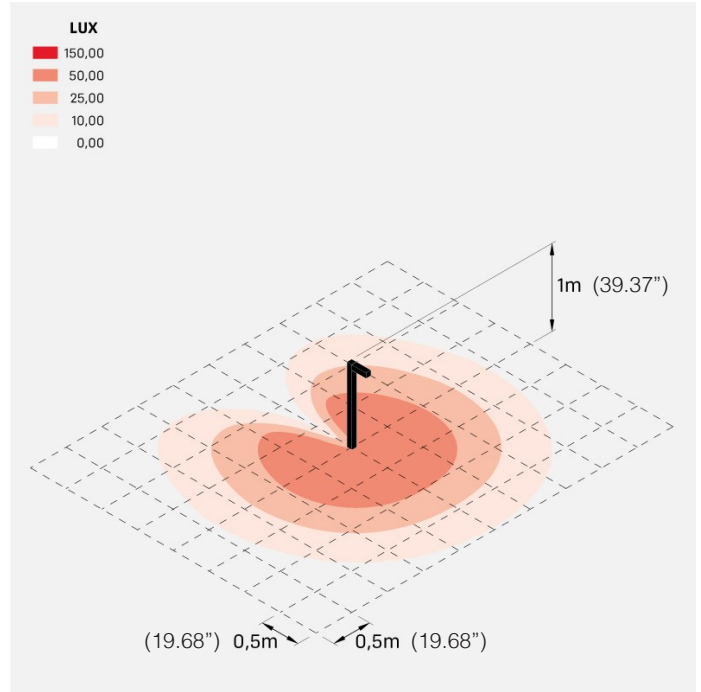

silvio 200_bollard_w

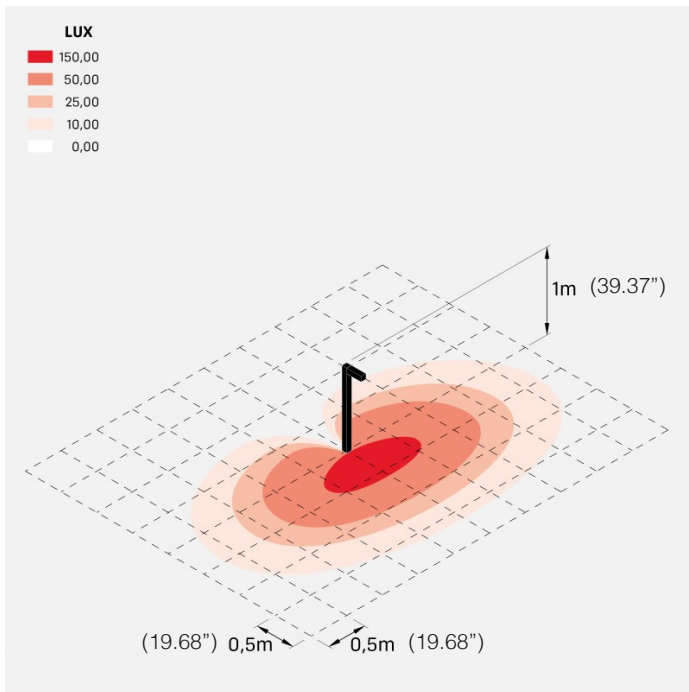

silvio 200_bollard_a

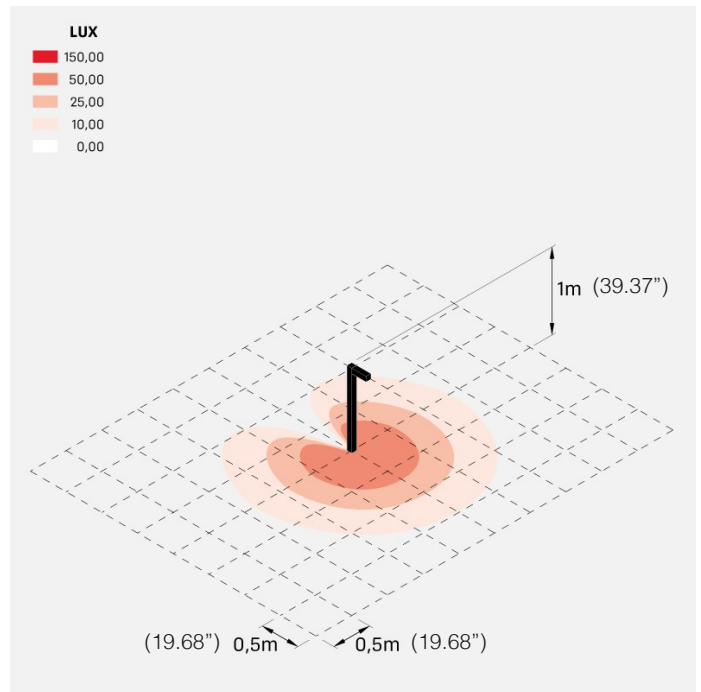

silvio 200_bollard_d