

MAXI™ SERIES

WALL/CEILING

TYPE:

PROJECT NAME:



SMALL



MIDI



MAXI



SUPERMAXI




SUPERMAXI CORRIDOR

SMALL, MIDI, MAXI & SUPERMAXI



Diffuser

Ultrawhite opal tempered glass diffuser for SMALL, MIDI and MAXI; opal UV resistant polycarbonate for SUPERMAXI. The polycarbonate diffuser emanates a wide and uniform light diffusion.



Wall and ceiling installation

Channel installation makes it possible to position lamps on walls or ceilings, including in corners.



Channel installation

The 3.2 m channel allows for easy installation of SUPERMAXI lamp lines. Two brackets allows you to easily attach the channel, permitting precision positioning and perfect alignment.

SPECIFICATION SHEET



SUPERMAXI "Corridor"

The Corridor function automatically eliminates non-useful illumination thanks to a PIR sensor circuit. 10% at rest mode and 100% upon detection.

MAXI™ SERIES


WALL/CEILING

TYPE:

PROJECT NAME:

Small


IP65 outdoor fixture for wall or ceiling application.
CRI 80.
Opal diffuser in ultra-white glass.
Finish options: Black, Silver

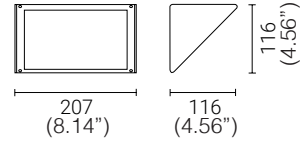

Code	Lamp	Voltage	Wattage	LED Lumens	Real Lumens	Optics
L985608LV	LED	24V	8.5	850	419	Diffuse

Midi


IP65 outdoor fixture for wall or ceiling application.
CRI 80.
Opal diffuser in ultra-white glass.
Finish options: Black, Silver

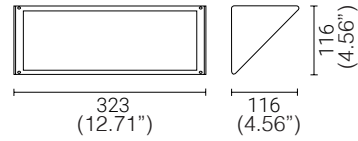

Code	Lamp	Voltage	Wattage	LED Lumens	Real Lumens	Optics
L985621LV	LED	24V	17	1700	838	Diffuse For optional vandalproof polycarbonate diffuser, add PC to code

Maxi

IP65 outdoor fixture for wall or ceiling application.
CRI 80.
Opal diffuser in ultra-white glass.
Finish options: Black, Silver

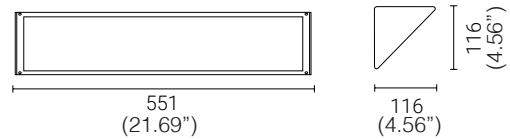

Code	Lamp	Voltage	Wattage	LED Lumens	Real Lumens	Optics
L985638LV	LED	24V	34	3400	1677	Diffuse For optional vandalproof polycarbonate diffuser, add PC to code

SPECIFICATION SHEET

MAXI™ SERIES

WALL/CEILING

TYPE:

PROJECT NAME:


Supermaxi

IP65 outdoor fixture for wall or ceiling application.

CRI 80.

Opal diffuser in polycarbonate.

Finish options: Black, Silver

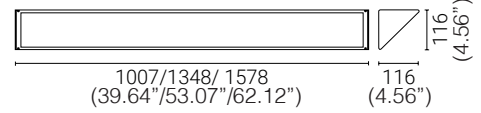

Code	Length	Lamp	Voltage	Wattage	LED Lumens	Real Lumens	Optics
L985212LV	1007mm 39.64"	LED	24V	20	2000	1192	Diffuse
L985213LV	1007mm 39.64"	LED	24V	40	4000	2138	Diffuse
L985221LV	1348mm 53.07"	LED	24V	29	2850	1682	Diffuse
L985223LV	1348mm 53.07"	LED	24V	58	5650	3132	Diffuse
L985232LV	1578mm 62.12"	LED	24V	34	3400	2039	Diffuse
L985233LV	1578mm 62.12"	LED	24V	69	6800	3727	Diffuse

Adjustable Arms


Aluminum arms for mounting to walls. Allows up to 30° of rotation.

To avoid water stagnation, an upward orientation of the light fixture is not recommended.

Code for one pair of arms:

L985080

Finish options: Black, Silver

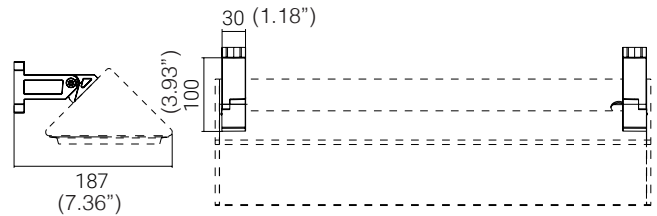

SPECIFICATION SHEET

Snap bracket

For mounting to ceilings.


Order 1 snap bracket for MIDI or MAXI.

For SUPERMAXI, order 2 brackets.

Code for one snap bracket:

L985091

Finish options: Black, Silver




MAXI™ SERIES

WALL/CEILING

TYPE:

PROJECT NAME:

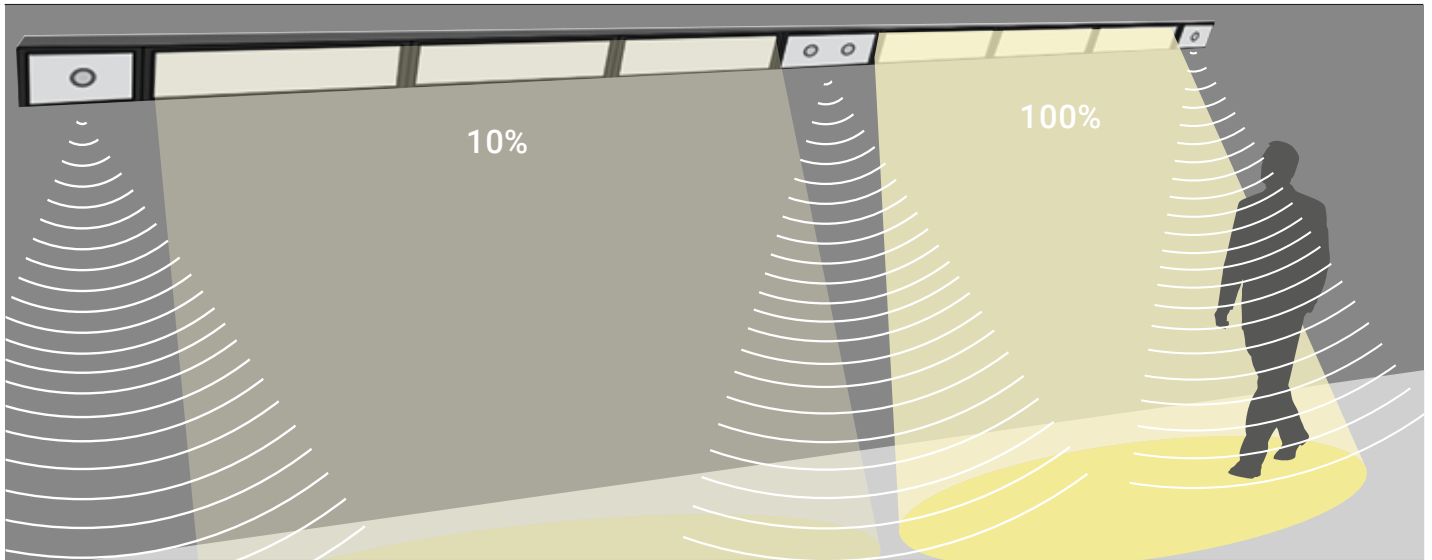

SUPERMAXI is also available with a Corridor function to allow a smart light control. Thanks to a PIR sensor compatible with the incorporated control gear, the luminaires dim down to 10%, but upon motion detection they will light up to 100% for a pre-set period of time. Other settings available upon request. Blind modules can be inserted between continuous SUPERMAXI lines.




Supermaxi Corridor Modules

IP65 modules for adding motion detection capabilities to Supermaxi fixtures. Housing and frame in aluminum, side covers in polycarbonate.

Code for single sensor module:
L985700

Code for double sensor module:
L985704




207
(8.14")



116
(4.56")



116
(4.56")



323
(12.7")

SPECIFICATION SHEET

MAXI™ SERIES

WALL/CEILING


TYPE:

PROJECT NAME:

Aluminum conduit

For wall mounting. Each module contains 3 drill points.


Code for one module:
L985692
Finish: Black

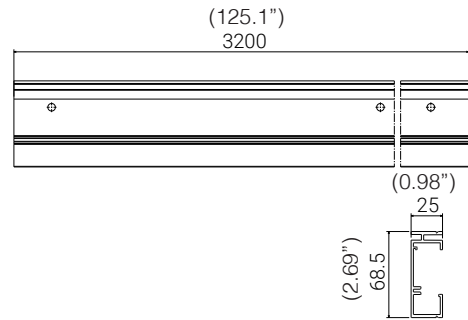

Side cover

Fits either left or right side


Code for one pair:
L985693
Finish: Black

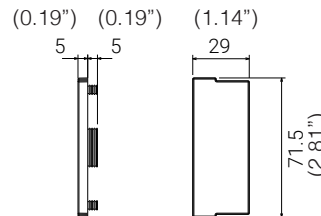

Snapping cover

Made from technopolymer


Code for one module:
L985694
Finish: Black

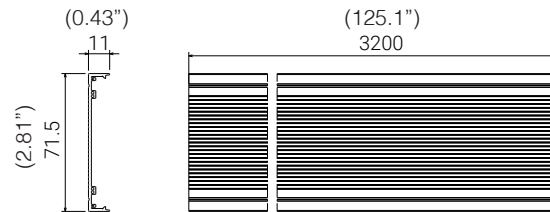

Mounting brackets

For mounting SUPERMAXI to conduits.

Code for one pair:
L985696
Finish: Black




Blind SUPERMAXI modules

Same aluminum housing and side covers of SUPERMAXI fixture without lights.

Code for length 1348mm (53.07"): L985705

Code for length 1578mm (62.12"): Finish: Black

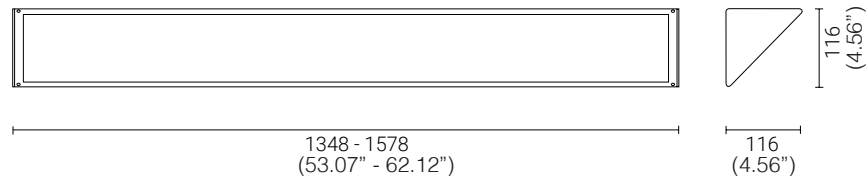

SPECIFICATION SHEET

MAXI™ SERIES

WALL/CEILING

TYPE:

PROJECT NAME:

ORDERING INFO

LIGHT FIXTURES:

Order Code	Finish	LED	Remote Driver Options
	<input type="radio"/> Black	<input type="radio"/> 27K (2700K)	<input type="radio"/> 120V Phase Dimming
	<input type="radio"/> Silver	<input type="radio"/> 3K (3000K)	<input type="radio"/> 120V 0-10V Dimming
		<input type="radio"/> 4K (4000K)	<input type="radio"/> 277V 0-10V Dimming

ACCESSORIES:

Order Code	Finish (if applicable)

SPECIFICATION SHEET

