

# SPOON™

RECESSED

TYPE:

PROJECT NAME:




## L676350

0.22 lb

/WW Led max 2W 500 mA 199lm 3000K

/W Led max 2W 500 mA 209lm 4000K

/XW Led max 2W 500 mA 189lm 2700K

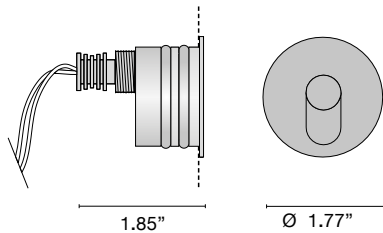

.01/WW .01/W .45/WW .45/W  
.01/XW .45/XW

1.50"


## L676351

0.22 lb

/WW Led max 2W 500 mA 199lm 3000K

/W Led max 2W 500 mA 209lm 4000K

/XW Led max 2W 500 mA 189lm 2700K

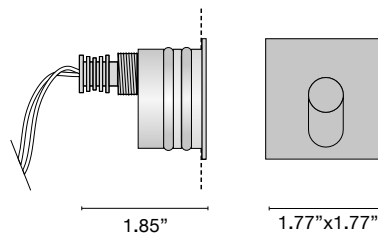

.01/WW .01/W .45/WW .45/W  
.01/XW .45/XW

1.50"

Recessed spotlight for asymmetric emission. Aluminum frame in anodized or white finish. Heat sink included. Mounting with junction box.

### FINISHES

- .01 White
- .45 Anodized Aluminum

### Accessories



L670217  
Plastic Box

SPECIFICATION SHEET

## ORDERING INFO

| Model (Order Code) | Finish                                      | LED                         | Remote Driver Options (500mA 12W)                               |
|--------------------|---|-----------------------------|---|
|                    | <input type="radio"/> .01 White             | <input type="radio"/> 2700K | <input type="radio"/> 120V On/Off (Min 1 Max 6 Fixtures)        |
|                    | <input type="radio"/> .45 Anodized Aluminum | <input type="radio"/> 3000K | <input type="radio"/> 120V Phase Dimming (Min 3 Max 6 Fixtures) |
|                    |   | <input type="radio"/> 4000K | <input type="radio"/> 120V 0-10V Dimming (Min 3 Max 6 Fixtures) |
|                    |   |                             | <input type="radio"/> 277V 0-10V Dimming (Min 3 Max 6 Fixtures) |



# Luminart®

WWW.LUMINARTLIGHTING.COM  
Last updated: 05/07/21