


SUSPENDX™

SUSPENSION

TYPE:

PROJECT NAME:

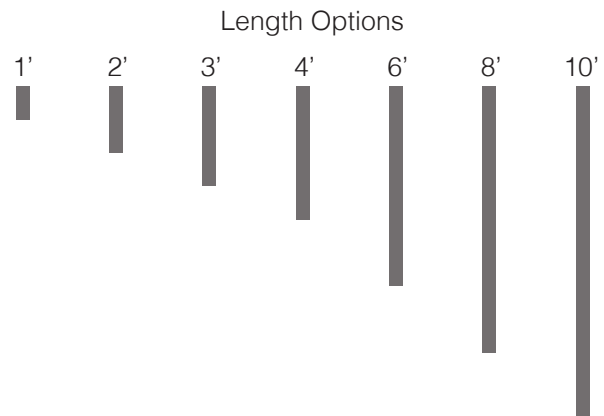

ORDERING INFO

Model	Length	Direct	LED	Body Finish	Dimming	Voltage
<input type="radio"/> SUSPENDX	<input type="radio"/> 01: 1'	<input type="radio"/> 3W	<input type="radio"/> 27K (2700K)	<input type="radio"/> Black Painted	<input type="radio"/> LTE (Leading/ Trailing Edge Dim)	<input type="radio"/> 120V
	<input type="radio"/> 02: 2'		<input type="radio"/> 30K (3000K)	<input type="radio"/> White Painted		
	<input type="radio"/> 03: 3'		<input type="radio"/> 40K (4000K)	<input type="radio"/> Aluminum Grey Painted		
	<input type="radio"/> 04: 4'			<input type="radio"/> Dark Bronze Painted		
	<input type="radio"/> 06: 6'			<input type="radio"/> Gold Painted		
	<input type="radio"/> 08: 08'			<input type="radio"/> Copper Painted		
	<input type="radio"/> 10: 10'			<input type="radio"/> Custom		
	<input type="radio"/> C: Custom					

SPECIFICATIONS

Design

Slim profile pendant luminaire providing direct lighting.

Construction

Housing: Extruded aluminum.
Canopy: Die-cast aluminum.

Light Source

LED module, 80CRI.

Optics

Flood beam.

Electrical

3W power input.
High efficiency electronic power supply, rated 50,000 hours 120.

Dimming


Leading/Trailing Edge dimming.

Mounting

Supplied with 5' aircraft cable. To be installed on standard 4" junction box.

Finish

Available in white, black, aluminum, or custom finish option.

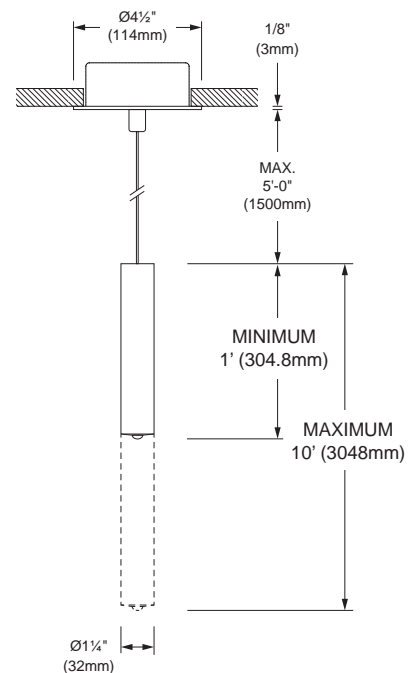

SIDE VIEW

SPECIFICATION SHEET

LEDOLOGY®

A **Luminart** BRAND

WWW.LEDOLOGY.COM