


# SUSPENDX™

SUSPENSION

TYPE:

PROJECT NAME:

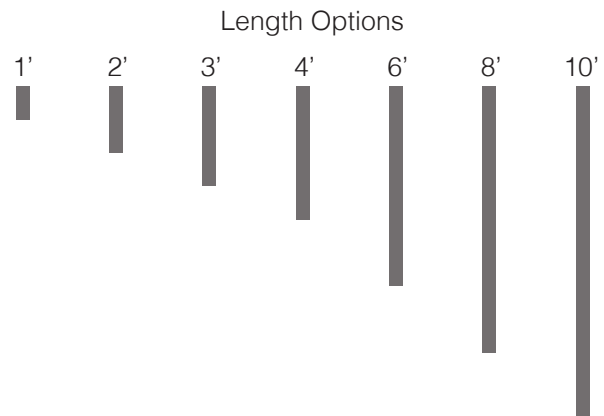

## ORDERING INFO

Model	Length	Direct	LED	Body Finish	Dimming	Voltage
<input type="radio"/> SUSPENDX	<input type="radio"/> 01: 1'	<input type="radio"/> 3W	<input type="radio"/> 27K (2700K)	<input type="radio"/> Black	<input type="radio"/> LTE (Leading/ Trailing Edge Dim)	<input type="radio"/> 120V
	<input type="radio"/> 02: 2'		<input type="radio"/> 30K (3000K)	<input type="radio"/> White		
	<input type="radio"/> 03: 3'		<input type="radio"/> 40K (4000K)	<input type="radio"/> Aluminum Grey		
	<input type="radio"/> 04: 4'			<input type="radio"/> Dark Bronze		
	<input type="radio"/> 06: 6'			<input type="radio"/> Gold		
	<input type="radio"/> 08: 08'			<input type="radio"/> Custom		
	<input type="radio"/> 10: 10'					
	<input type="radio"/> C: Custom					

## SPECIFICATIONS

### Design

Slim profile pendant luminaire providing direct lighting.

### Construction

Housing: Extruded aluminum.

Canopy: Die-cast aluminum.

### Light Source

LED module, 80CRI.

### Optics

Flood beam.

### Electrical

3W power input.

High efficiency electronic power supply, rated 50,000 hours 120.

### Dimming


Leading/Trailing Edge dimming.

### Mounting

Supplied with 5' aircraft cable. To be installed on standard 4" junction box.

### Finish

Available in white, black, aluminum, or custom finish option.

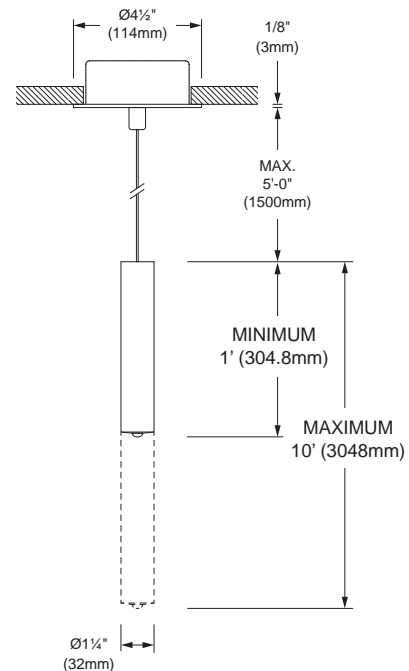

SIDE VIEW

SPECIFICATION SHEET

LEDOLOGY®

A Luminart BRAND

WWW.LEDOLOGY.COM