

TILT™

WALL MOUNT - ADA COMPLIANT

TYPE:

PROJECT NAME:



Tilt is a wall luminaire which, thanks to its compact size and minimalist form, takes up little space while providing optimum lighting for reading with its mobile arm and optical lens for adjusting the lighting angle.

Color rendering: CRI 95

Installation: Wall mounted

Optic: 15° - 40°



Ingress protection: IP20

Electrical: High efficiency electronic power supply, rated 50,000 hours 120V-277V

Input [W] 6.4W

Lum. flux of light source [lm] 524 lm

Finish options:

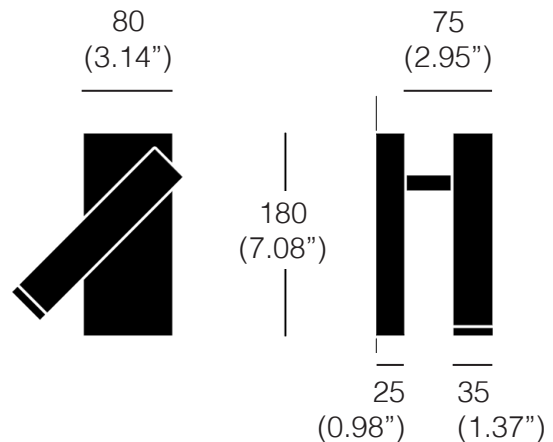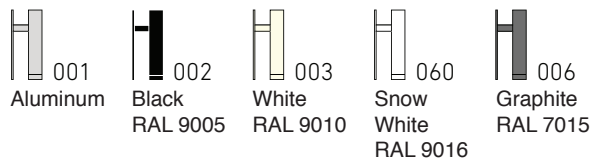

ORDERING INFO

Model (Order Code)	Housing Finish	LED	Dimming Options
<input type="radio"/> L3815.2112 (without switch)	<input type="radio"/> 001: Aluminum	<input type="radio"/> 27: 2700K	<input type="radio"/> 120V LTE
<input type="radio"/> L3815.2124 (with integral rocker switch)	<input type="radio"/> 002: Black	<input type="radio"/> 30: 3000K	<input type="radio"/> 120V-277V 0-10V
	<input type="radio"/> 003: White	<input type="radio"/> 40: 4000K	
	<input type="radio"/> 060: Snow White		
	<input type="radio"/> 006: Graphite		



SPECIFICATION SHEET

TILT™

WALL RECESSED - ADA COMPLIANT

TYPE:


PROJECT NAME:



WALL RECESSED

Tilt is a wall recessed luminaire which, thanks to its compact size and minimalist form, takes up little space while providing optimum lighting for reading with its mobile arm and optical lens for adjusting the lighting angle. Also available is a version with a touchless switch. To switch the light on or off, you need only to move your palm close to the luminaire.

Spot and wall mounted lighting. The luminaires will work perfectly at hotels, in art galleries, museums or restaurants, but also in residential spaces, as bedside lighting solutions.



Installation Note:
Fixture includes 4" x 4" square backplate

ORDERING INFO

Model	Finish	Output	LED	Voltage	Dimming
<input type="radio"/> L3815.2106 (without switch)	<i>See below</i>	<input type="radio"/> LED 6.4W	<input type="radio"/> 27K (2700K)	<input type="radio"/> 120V	<input type="radio"/> LTE (Leading/Trailing Edge Dim)
<input type="radio"/> L3815.2107 (with integral rocker switch)			<input type="radio"/> 30K (3000K)	<input type="radio"/> 277V	<input type="radio"/> 010V (0-10V)
			<input type="radio"/> 40K (4000K)		

FINISH OPTIONS



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM
Last updated: 9/19/24