

TITAN™ T400


SUSPENSION

TYPE:

PROJECT NAME:



Round ceiling or wall light with shade diameter Ø400mm (15.74"). Product consists of wire pendant and opal polycarbonate shade. Shade is fixed by two-step clamp holders. Suitable for indoor and outdoor use.

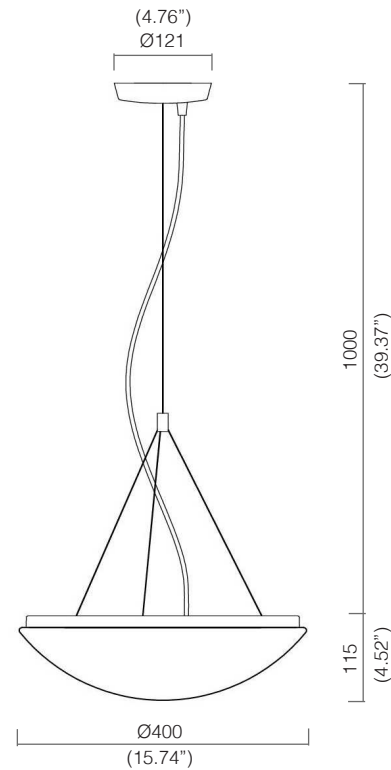

Power input: 27W

Hanger: wire with length 1000mm (39.37")

Mounting: Pendant

Shade: Opal polycarbonate

Electrical: High efficiency electronic power supply, rated 50,000 hours 120V-277V

Dimming: Power supply compatible with 0-10V (UNV) or leading (TRIAC) and trailing edge (ELV) (120V only).

Finish: White

Base material: Steel

Source: LED module

3000K: 80CRI

4000K: 80CRI

Lumen maintenance: >80% of initial lumens at 50,000h

Input [W]	Lum. flux of light source [lm]		Lum. flux of luminaire [lm]	
	3000K	4000K	3000K	4000K
27	3690	3890	2550	2680

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Structure Finish	LED	Driver Options
<input type="radio"/> L74TITANT2 27W	<input type="radio"/> White Ral 9003	<input type="radio"/> 3000K <input type="radio"/> 4000K	<input type="radio"/> 120V Phase Dimming <input type="radio"/> 120V 0-10V Dimming <input type="radio"/> 277V 0-10V Dimming



Luminart®

WWW.LUMINARTLIGHTING.COM

TITAN™ T500


SUSPENSION

TYPE:

PROJECT NAME:



Round ceiling or wall light with shade diameter Ø500mm (19.68"). Product consists of wire pendant and opal polycarbonate shade. Shade is fixed by two-step clamp holders. Suitable for indoor and outdoor use.

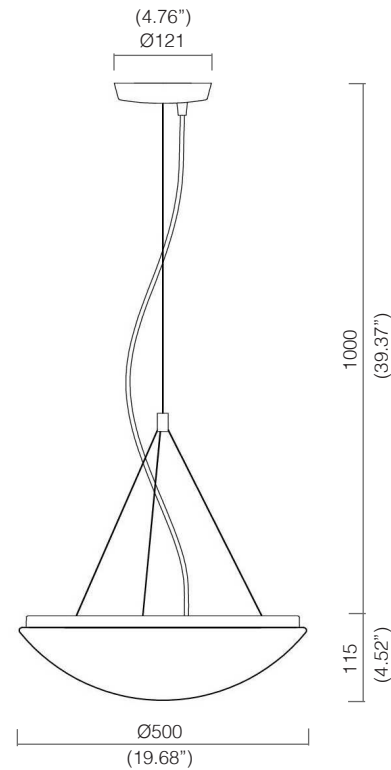

Power input: 35W

Hanger: wire with length 1000mm (39.37")

Mounting: Pendant

Shade: Opal polycarbonate

Electrical: High efficiency electronic power supply, rated 50,000 hours 120V-277V

Dimming: Power supply compatible with 0-10V (UNV) or leading (TRIAC) and trailing edge (ELV) (120V only).

Finish: White

Base material: Steel

Source: LED module

3000K: 80CRI

4000K: 80CRI

Lumen maintenance: >80% of initial lumens at 50,000h

Input [W]	Lum. flux of light source [lm]		Lum. flux of luminaire [lm]	
	3000K	4000K	3000K	4000K
35	5050	5330	3490	3680

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Structure Finish	LED	Driver Options
<input type="radio"/> L74TITANT3 35W	<input type="radio"/> White Ral 9003	<input type="radio"/> 3000K <input type="radio"/> 4000K	<input type="radio"/> 120V Phase Dimming <input type="radio"/> 120V 0-10V Dimming <input type="radio"/> 277V 0-10V Dimming



Luminart®

WWW.LUMINARTLIGHTING.COM