

TYRIUS™ COLLECTION

CEILING

TYPE:

PROJECT NAME:




SPECIFICATION SHEET

TYRIUS™ DOWN 350

CEILING

TYPE:

PROJECT NAME:

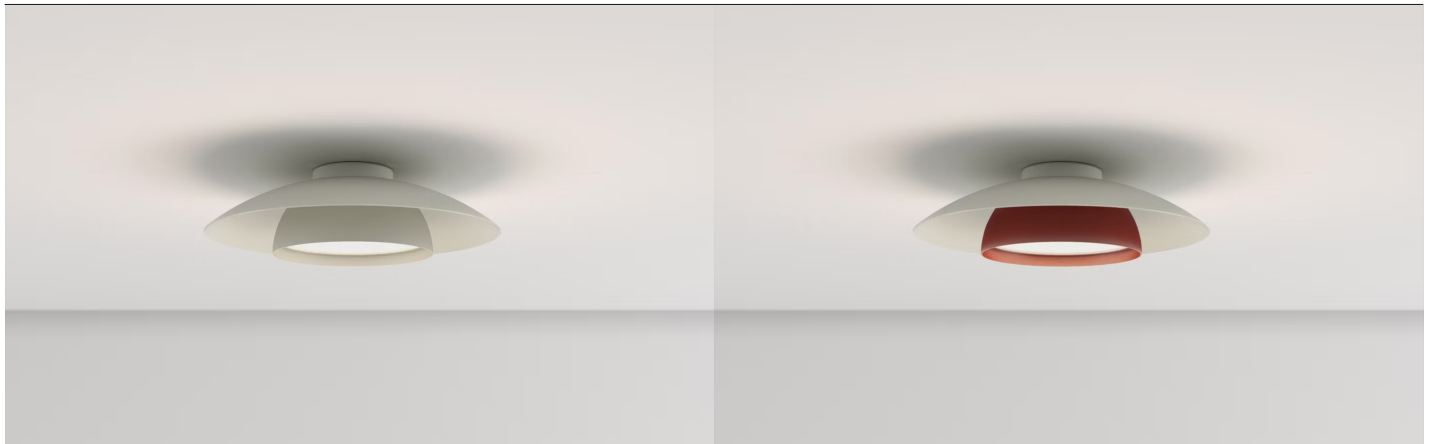


Technical information

Index Protection	IP20
Driver	Included
CRI	90
Temperature	2700K/3000K/4000K
Lifetime	50.000h
Technology	LED
Guarantee	5 years
Voltage	120V
Step McAdam:	3-SDCM
Flicker:	Flicker Free

L6531420-
Tyrius Down 350

ø350 mm (13.77")



ø190 mm (7.48")



97 mm (3.81")

Model

	Interior Cup Finish	Exterior Cup Finish	CRI/Temp.	Led
L6531420	M Grey Blue (RAL 5008)	M Grey Blue	H 927	3 2150lm / 21W
	J Cement Grey (RAL 7033)	J Cement Grey	E 930	
	E Silk Grey (RAL 7044)	E Silk Grey	F 940	
	S Red Oxide (RAL 3009)	S Red Oxide		

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Interior Finish	Exterior Finish	LED Temp	Driver Options
	<input type="radio"/> Grey Blue	<input type="radio"/> Grey Blue	<input type="radio"/> 2700K	<input type="radio"/> 120V Phase Dimming
	<input type="radio"/> Cement Grey	<input type="radio"/> Cement Grey	<input type="radio"/> 3000K	<input type="radio"/> 120V 0-10V Dimming
	<input type="radio"/> Silk Grey	<input type="radio"/> Silk Grey	<input type="radio"/> 4000K	<input type="radio"/> 277V 0-10V Dimming
	<input type="radio"/> Red Oxide	<input type="radio"/> Red Oxide		



Luminart®

WWW.LUMINARTLIGHTING.COM

TYRIUS™ DOWN 500

CEILING

TYPE:

PROJECT NAME:




Technical information


Index Protection	IP20
Driver	Included
CRI	90
Temperature	2700K/3000K/4000K
Lifetime	50.000h
Technology	LED
Guarantee	5 years
Voltage	120V
Step McAdam	3-SDCM
Flicker	Flicker Free

L6531430-
Tyrius Down 500

ø500 mm (19.68")



ø304 mm (11.96")



129 mm (7.55")

Model

	Interior Cup Finish	Exterior Cup Finish	CRI/Temp.	Led
L6531430 ● M	Grey Blue (RAL 5008)	M Grey Blue	H 927	2 1900lm/14W
● J	Cement Grey (RAL 7033)	J Cement Grey	E 930	3 2500lm/21W
● E	Silk Grey (RAL 7044)	E Silk Grey	F 940	
● S	Red Oxide (RAL 3009)	S Red Oxide		

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Interior Finish	Exterior Finish	LED Temp	Driver Options
	<input type="radio"/> Grey Blue	<input type="radio"/> Grey Blue	<input type="radio"/> 2700K	<input type="radio"/> 120V Phase Dimming
	<input type="radio"/> Cement Grey	<input type="radio"/> Cement Grey	<input type="radio"/> 3000K	<input type="radio"/> 120V 0-10V Dimming
	<input type="radio"/> Silk Grey	<input type="radio"/> Silk Grey	<input type="radio"/> 4000K	<input type="radio"/> 277V 0-10V Dimming
	<input type="radio"/> Red Oxide	<input type="radio"/> Red Oxide		



Luminart®

WWW.LUMINARTLIGHTING.COM

TYRIUS™ DOWN 700

CEILING

TYPE:

PROJECT NAME:




Technical information


L6531440-
Tyrius Down 700

Index Protection	IP20
Driver	Included
CRI	90
Temperature	2700K/3000K/4000K
Lifetime	50.000h
Technology	LED
Guarantee	5 years
Voltage	120V
Step McAdam	3-SDCM
Flicker	Flicker Free

ø700 mm (27.55")



ø304 mm (11.96")



128.5 mm (5.05")

Model

	Interior Cup Finish	Exterior Cup Finish	CRI/Temp.	Led
L6531440	● M Grey Blue (RAL 5008)	M Grey Blue	H 927	3 2500lm/21W
	● J Cement Grey (RAL 7033)	J Cement Grey	E 930	4 3500lm/29W
	● E Silk Grey (RAL 7044)	E Silk Grey	F 940	
	● S Red Oxide (RAL 3009)	S Red Oxide		

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Interior Finish	Exterior Finish	LED Temp	Driver Options
	<input type="radio"/> Grey Blue	<input type="radio"/> Grey Blue	<input type="radio"/> 2700K	<input type="radio"/> 120V Phase Dimming
	<input type="radio"/> Cement Grey	<input type="radio"/> Cement Grey	<input type="radio"/> 3000K	<input type="radio"/> 120V 0-10V Dimming
	<input type="radio"/> Silk Grey	<input type="radio"/> Silk Grey	<input type="radio"/> 4000K	<input type="radio"/> 277V 0-10V Dimming
	<input type="radio"/> Red Oxide	<input type="radio"/> Red Oxide		



Luminart®

WWW.LUMINARTLIGHTING.COM