

# VISTA™

RECESSED

**TYPE:**

**PROJECT NAME:**



Recessed spot (IP 67) with frame in stainless steel AISI 316L and aluminum heat sink. Neoprene cable 11.8". Diffuser with anti-dazzling eyelid. Mounting with or without recessed box.



FINISHES:  
.33 AISI 316L Stainless Steel

**L676362**

0.22 lb

/WW Led max 2W 500mA 199lm 3000K

/W Led max 2W 500mA 209lm 4000K

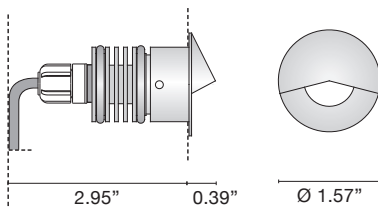

**Accessories**



**L670216**  
Plastic Box



**L670220**  
Junction box + IP Connector

**.33/W .33/WW** Inox AISI 316L

1.18"

**ORDERING INFO**

Model (Order Code)	Finish	LED	Remote Driver Options (500mA 12W)
	<input type="radio"/> .33 AISI 316L Stainless Steel	<input type="radio"/> 3000K <input type="radio"/> 4000K	<input type="radio"/> 120V On/Off (Min 1 Max 6 Fixtures) <input type="radio"/> 120V Phase Dimming (Min 3 Max 6 Fixtures) <input type="radio"/> 120V 0-10V Dimming (Min 3 Max 6 Fixtures) <input type="radio"/> 277V 0-10V Dimming (Min 3 Max 6 Fixtures)



SPECIFICATION SHEET

**LEDOLOGY®**

A **Luminart** BRAND

WWW.LEDOLOGY.COM  
Last updated: 4/15/21