WANDA™

LINEAR PROFILE LED

TYPE:

PROJECT NAME:

L674536 1.10 lb

Led 7.2W 24V 850lm 4000K

F III IP67 39.37"

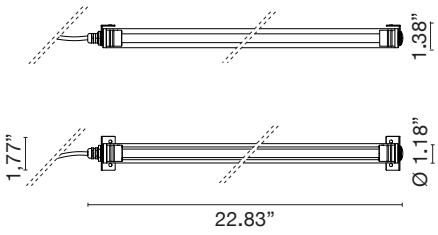

.33

L674537 2.20 lb

Led 15.8W 24V 1870lm 4000K

F III IP67 39.37"

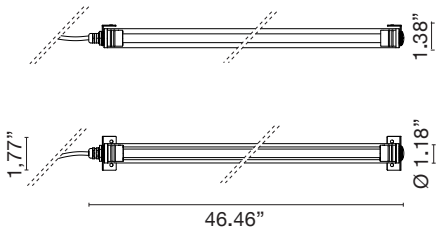

.33

Adjustable LED profile IP67 in coextruded anti-UV transparent methacrylate and AISI 316L stainless steel terminals. Neoprene cable 39.3". Wall or ceiling installation possible.

FINISHES:
.33 AISI 316L Stainless Steel

CUSTOM LENGTHS:
Available in custom lengths ranging from 7.08" to 117.32". Wattage and lumen output vary by length. Please contact us for more information.

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	- Finish	- LED	- Remote Driver Options
	◯ .33 AISI 316L Stainless Steel	◯ 2700K ◯ 3000K ◯ 4000K	◯ 120V On/Off ◯ 120V Phase Dimming ◯ 120V 0-10V Dimming ◯ 277V 0-10V Dimming *Please contact us for driver specifications*

Intertek