

WASH™


Wall effect



WASH 22
LED



WASH 42
LED



WASH 24
LED



WASH 52
LED

WASH™


Wall effect

GENERAL FEATURES

- Outdoor wall-washer effect wall fitting.
- **Structure:** ultrawhite opal or transparent tempered glass diffuser. Low copper content die-cast aluminium body. Matching stainless steel screws.
- Available with double or single light that can be adjusted upward or downward.
- Version with asymmetric emission and clear glass with net light demarcation. Version with symmetrical light emission and opal glass.
- Low consumption **sources** and **new generation LEDs** with minimum life 50,000 h with subsequent deterioration max 30%. Driver inside.
- Cable entry from the back.
- **Finish:** on aluminium, pickling + phosphochrome + epoxy basic coating + UV resistant stabilised epoxy powder coating.
- Manufactured in compliance with European standards EN 60598-1:2015 CE


OPAL GLASS, LINEAR MODULE FOR A SOFT LIGHT

WASH: Opal glass to have a soft and comfortable light.




CLEAR GLASS + POWER LED FOR DIRECT LIGHT

Ultra-white clear glass and adjustable Asymmetric reflectors for a direct, sharp and incisive light.



ADJUSTABLE ASYMMETRIC REFLECTORS

The Asymmetric reflector can be fixed in two different positions: against the wall to highlight the wall-washer effect or adjusted to illuminate balconies, walkways, corridors etc.

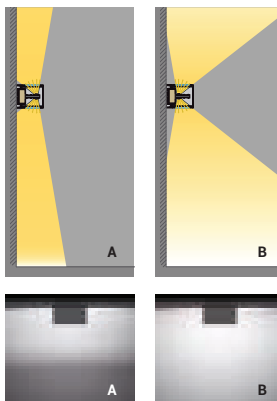

SIMPLE REFLECTOR ADJUSTMENT

It is quite simple to adjust the reflector: adjustment can be made even if the light is on. Unscrew, lift the reflector, turn 180° and screw.








TYPE: _____

PROJECT NAME: _____

WASH 22

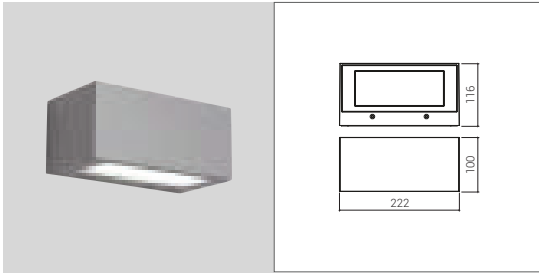

Opal glass + Linear Led Module



Ultra-white clear glass + asymmetric reflector and Power Led


CODE	LAMP	W	Real output	AN	AG	BI
- Up + down light						
L981301*	Led	2X9,3	2X1120 1394			
L981302*	E 27 Dulux El	L max 176mm	18			
- Single light (up or down)						
L981305*	Led	1X9,3	1120 513			
L981306*	E 27 Dulux El	L max 176mm	18			

Marine die-cast aluminium alloy housing.
Milled opal glass - frame level.
IP 65 / Class I / IK 08
CRI 80 / Driver IN / 500 mA
230V / 50 Hz
CE
Dimmable on request. Emergency on request.
Standard 4000K. Other tonality on request. Add TC to the code if 3000K.

CODE	LAMP	W	Real output	AN	AG	BI
- Up + down light						
L981308*	Led	2x9,5	2x1200 1860			
- Single light (up or down)						
L981309*	Led	1X9,5	1x1200 930			


Ultra-white milled clear glass-frame level.
Asymmetric reflector suitable to double position.
IP 65 / Class I / IK 08
CRI 80 / Driver IN / 350 mA
230V / 50 Hz
CE
Standard 4000K. Other tonality on request. Add TC to the code if 3000K.

WASH 42

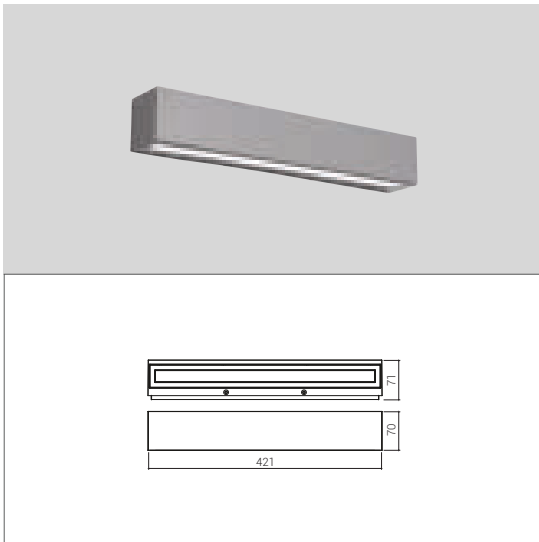

CODE	LAMP	W	Real output	AN	AG	BI
- Up + down light						
L981311*	Led	2x11	2x1470 1280			
- Single light (up or down)						
L981312*	Led	11	1470 640			

Milled Opal glass - frame level.
IP 65 / Class I / IK 08
CRI 80 / Driver IN / 700 mA
230V / 50 Hz
CE
Dimmable on request. Emergency on request.
Standard 4000K. Other tonality on request. Add TC to the code if 3000K.





Opal glass + Linear Led Module




TYPE: _____

WASH 24

PROJECT NAME: _____

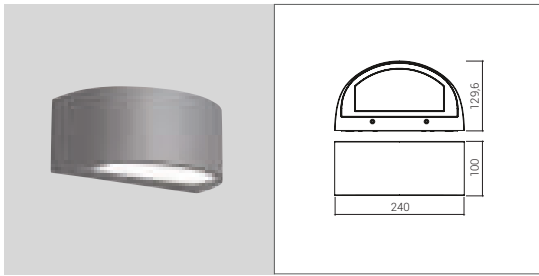

Opal glass + Linear Led Module



Ultra-white clear glass + asymmetric reflector and Power Led


CODE	LAMP	W	- Real output	AN	AG	BI
- Up + down light						
L981321*	Led	2X9,3	2X1120 1394			
L981322*	E 27 Dulux El	L max 176mm	18			
- Single light (up or down)						
L981324*	Led	1X9,3	1120 513			
L981325*	E 27 Dulux El	L max 176mm	18			

Marine die-cast aluminium alloy housing.
Milled opal glass - frame level.
IP 65 / Class I / IK 08
CRI 80 / Driver IN / 500 mA
230V / 50 Hz
CE
Dimmable on request. Emergency on request.
Standard 4000K. Other tonality on request. Add TC to the code if 3000K.

CODE	LAMP	W	Real output	AN	AG	BI
- Up + down light						
L981327*	Led	2x9,5	2x1200 1860			
- Single light (up or down)						
L981328*	Led	1X9,5	1x1200 930			


Ultra-white milled clear glass-frame level.
Asymmetric reflector suitable to double position.
IP 65 / Class I / IK 08
CRI 80 / Driver IN / 350 mA
230V / 50 Hz
CE
Standard 4000K. Other tonality on request. Add TC to the code if 3000K.

WASH 52

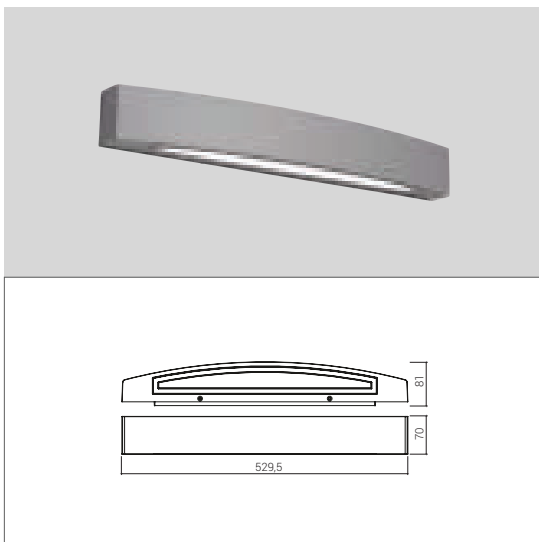

CODE	LAMP	W	Real output	AN	AG	BI
- Up + down light						
L981332*	Led	2x11	2x1470 1394			
- Single light (up or down)						
L981333*	Led	11	1470 698			

Milled Opal glass - frame level.
IP 65 / Class I / IK 08
CRI 80 / Driver IN / 700 mA
230V / 50 Hz
CE
Dimmable on request. Emergency on request.
Standard 4000K. Other tonality on request. Add TC to the code if 3000K.



Opal glass + Linear Led Module