

BAT™
CEILING

TYPE:

PROJECT NAME:




SPECIFICATION SHEET

BAT™

CEILING

TYPE:

PROJECT NAME:

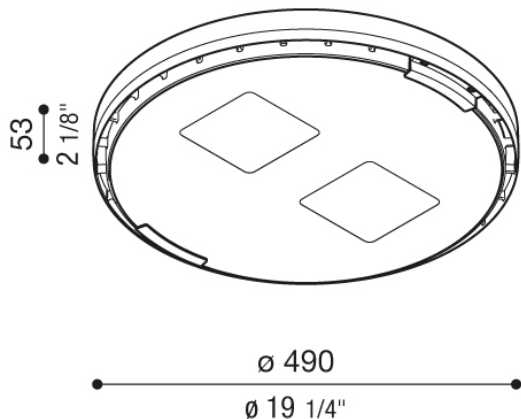


Lumen:

Power	Source Lumen	Delivered Lumen
30W	5996 lm	5280 lm
45W	8200 lm	7221 lm
65W	11059 lm	9739 lm
95W	15100 lm	13298 lm

Technical information:

Installation:	Suspension/Ceiling
Material:	Aluminum
Source type:	LED
Diffuser type:	Transparent glass
CRI:	>80
LB Factor:	L80B10 - 50.000h
Power consumption [Watt]	30 / 45 / 65 / 95
Source Lumen:	5996 - 15100 lm
Delivered Lumen:	5280 - 13298 lm
Type of protection:	IP66

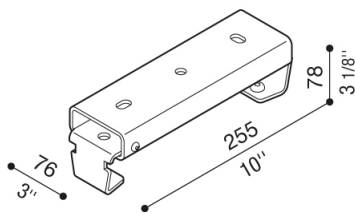

Ceiling bracket

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Structure Finish	Optic Options	LED	Dimming Options
<input type="radio"/> L53 BATCEILING	<input type="radio"/> BL: Black RAL9005 <input type="radio"/> CO: Corten <input type="radio"/> GR: Grey RAL9006 <input type="radio"/> WH: White RAL9010	<input type="radio"/> S6: Symmetric 60° <input type="radio"/> S9: Symmetric 90° <input type="radio"/> E: Ellittico <input type="radio"/> W: Wall Washer	<input type="radio"/> 3000K <input type="radio"/> 4000K <input type="radio"/> 5700K	<input type="radio"/> 120V LTE <input type="radio"/> 120V 0-10V <input type="radio"/> 277V 0-10V



Luminart®





WWW.LUMINARTLIGHTING.COM

BAT™ 30W

CEILING

TYPE:

PROJECT NAME:

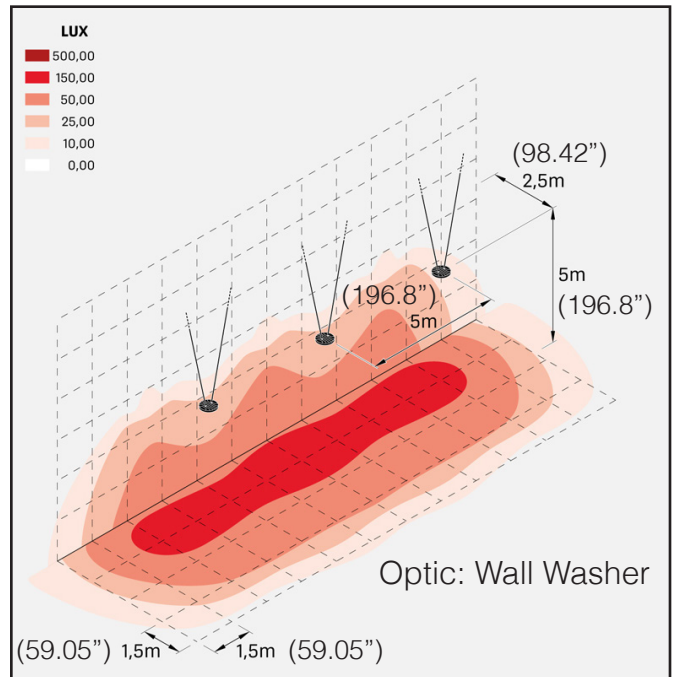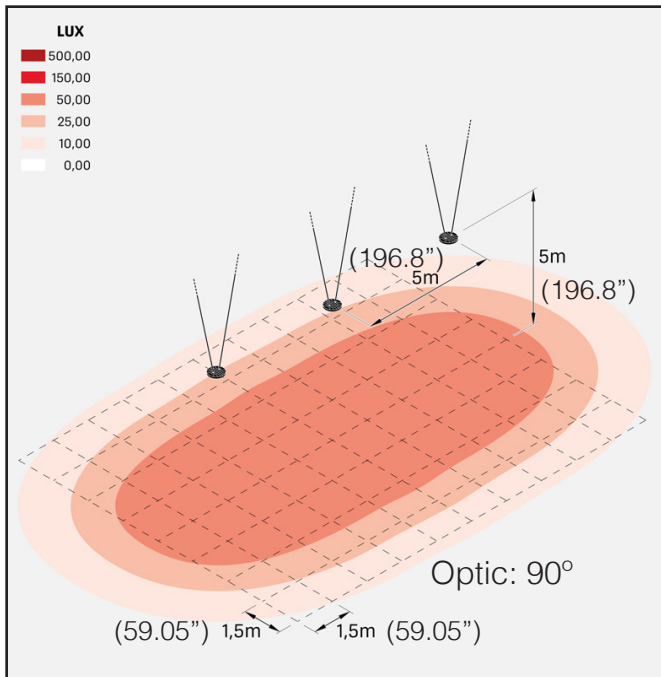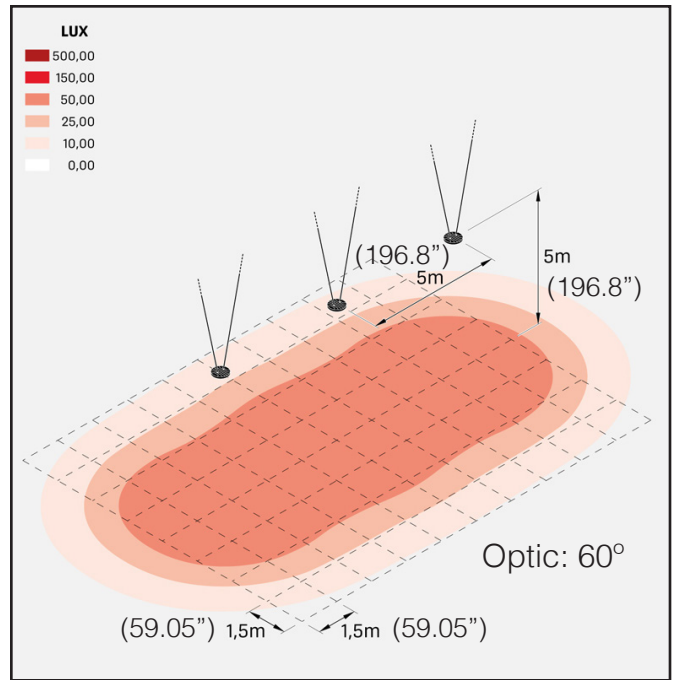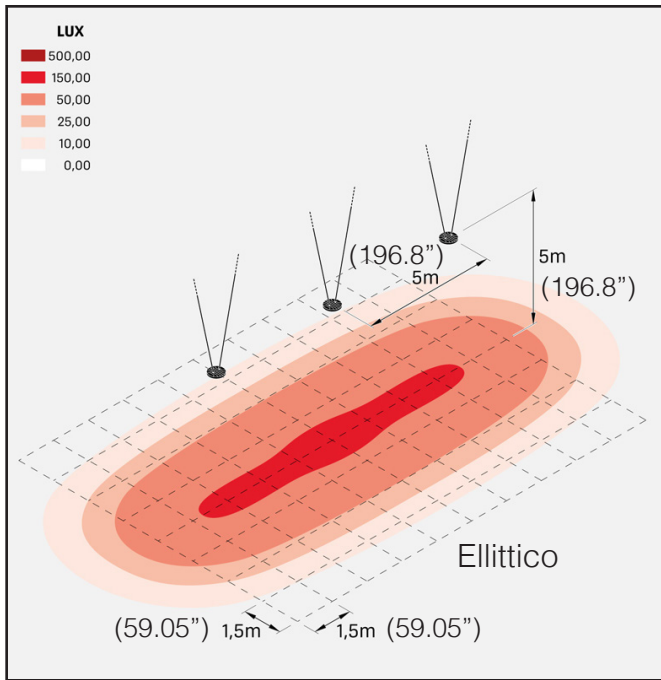





SPECIFICATION SHEET

BAT™ 45W

CEILING

TYPE:

PROJECT NAME:

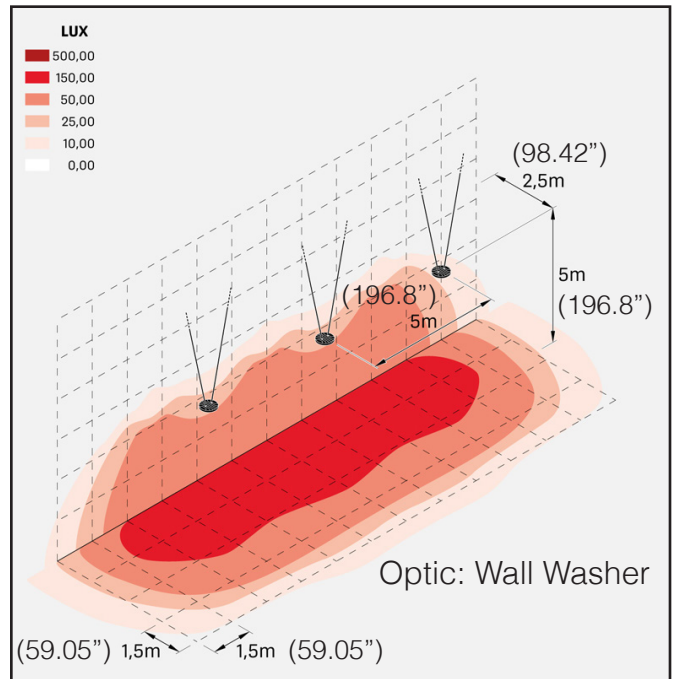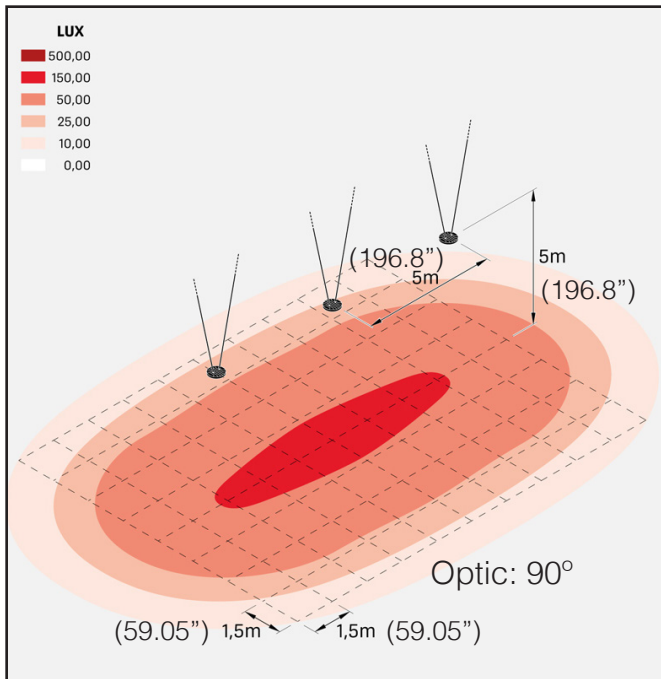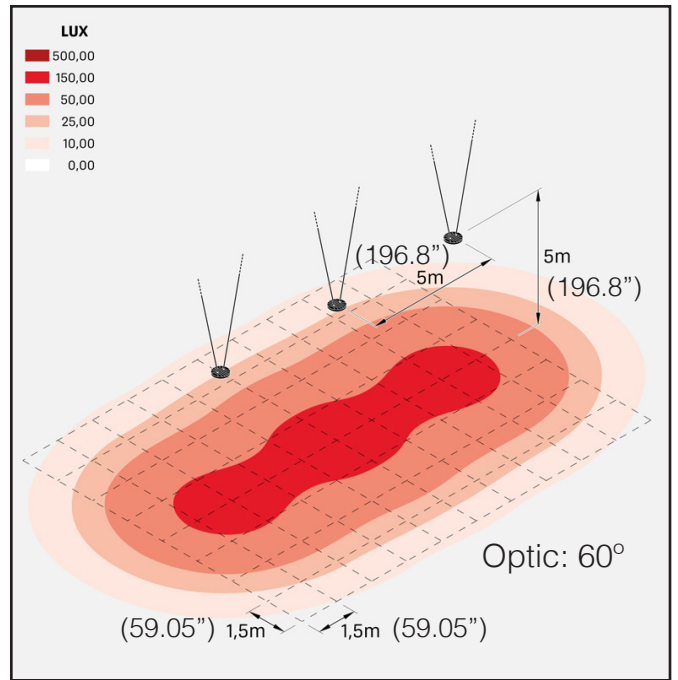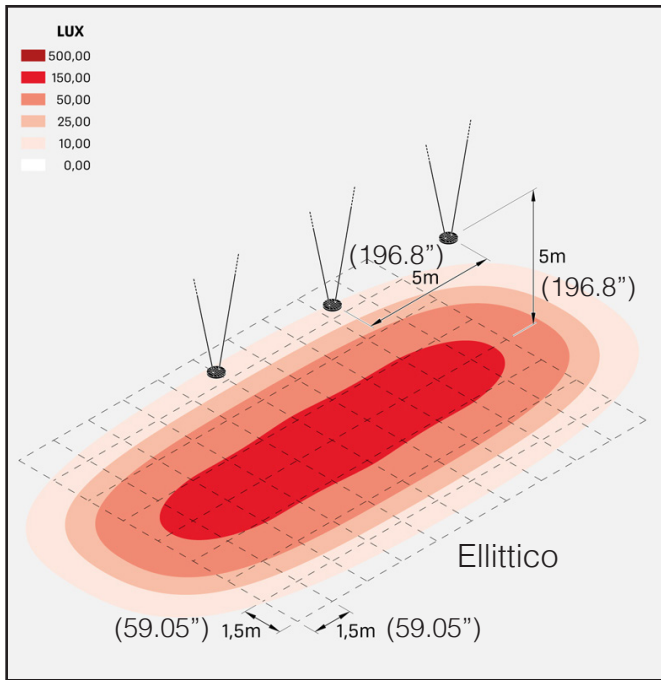





SPECIFICATION SHEET

BAT™ 65W

CEILING

TYPE:

PROJECT NAME:

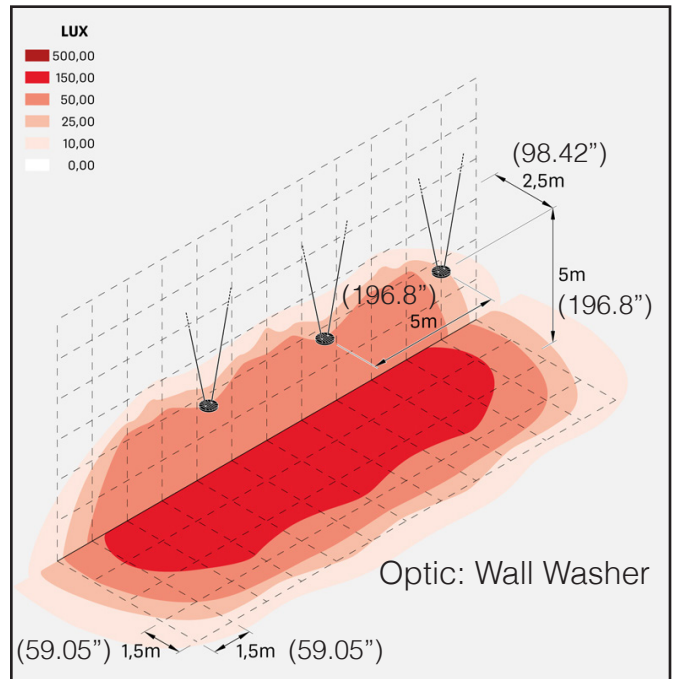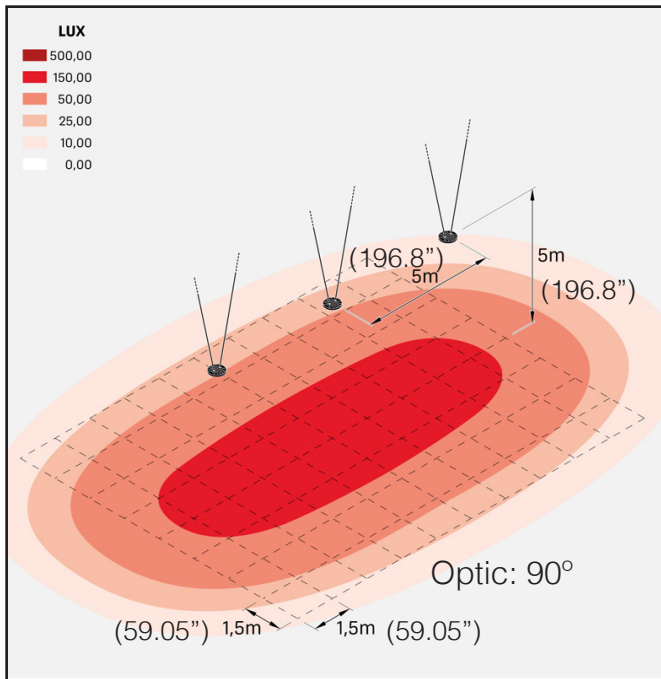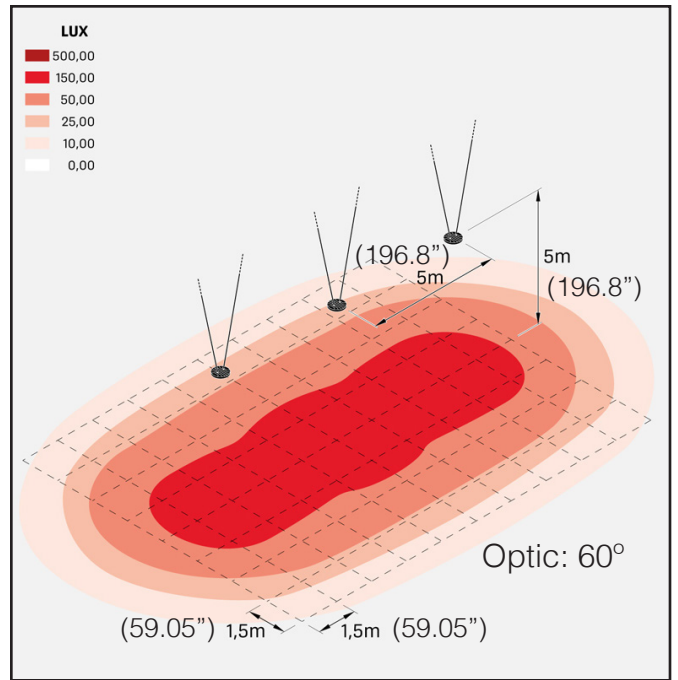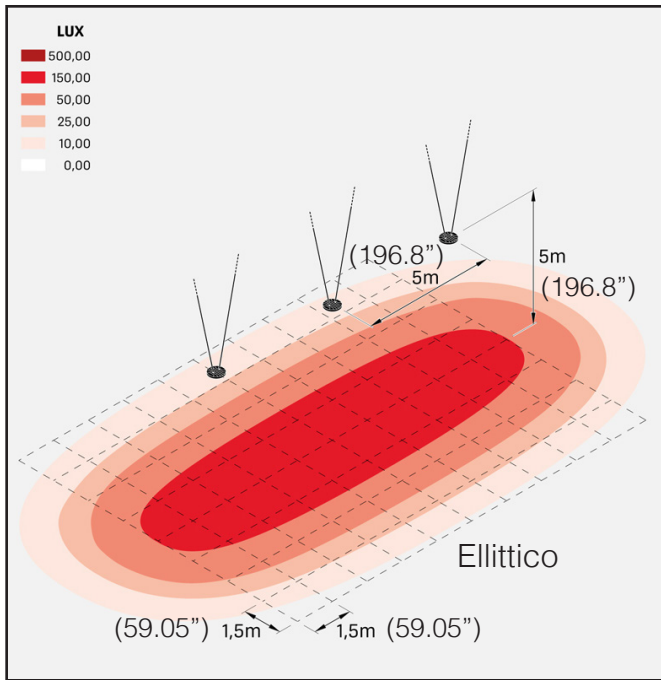





SPECIFICATION SHEET

BAT™ 95W

CEILING

TYPE:

PROJECT NAME:

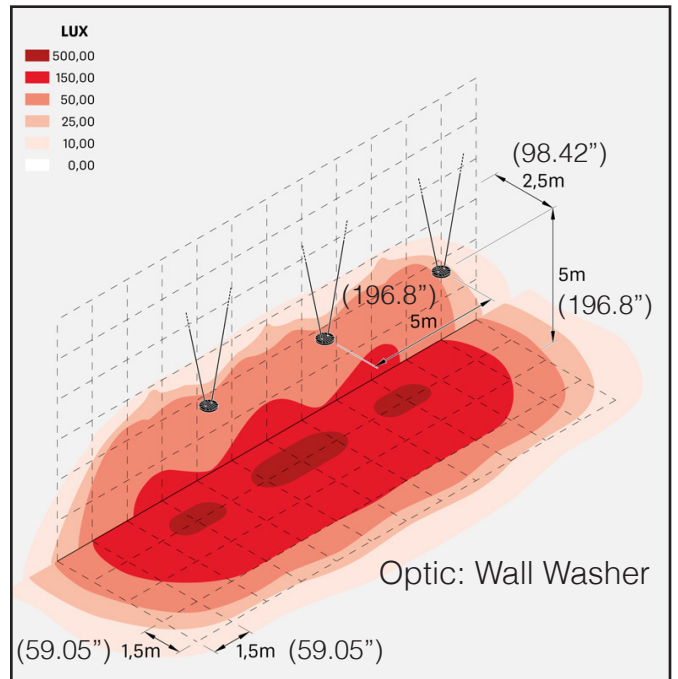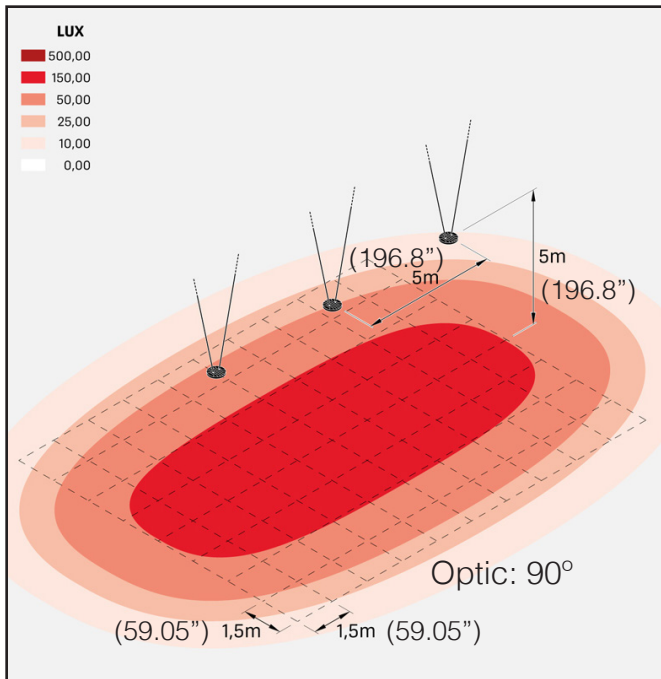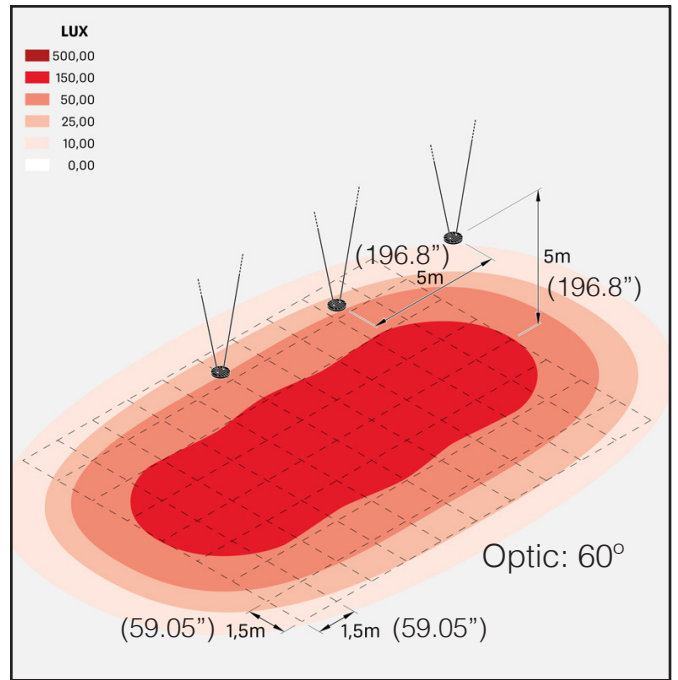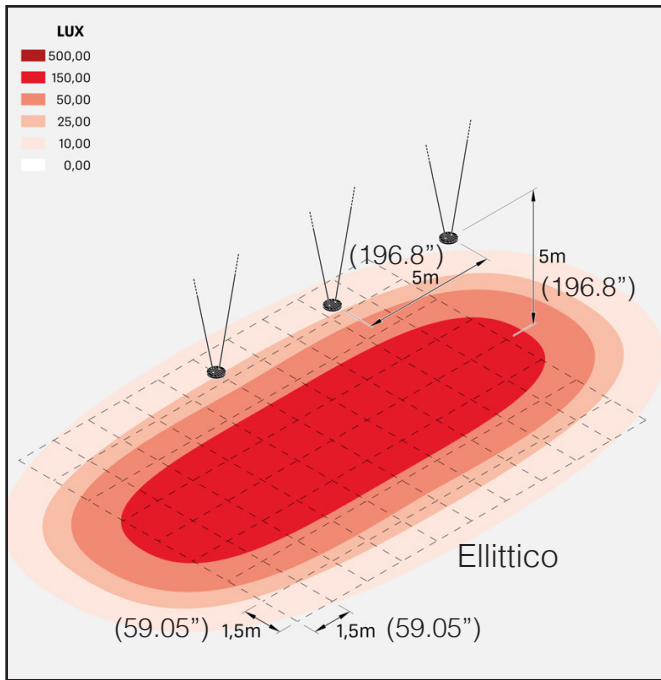

SPECIFICATION SHEET