


BLOOM™ MAXI

SPOTLIGHT

TYPE:

PROJECT NAME:

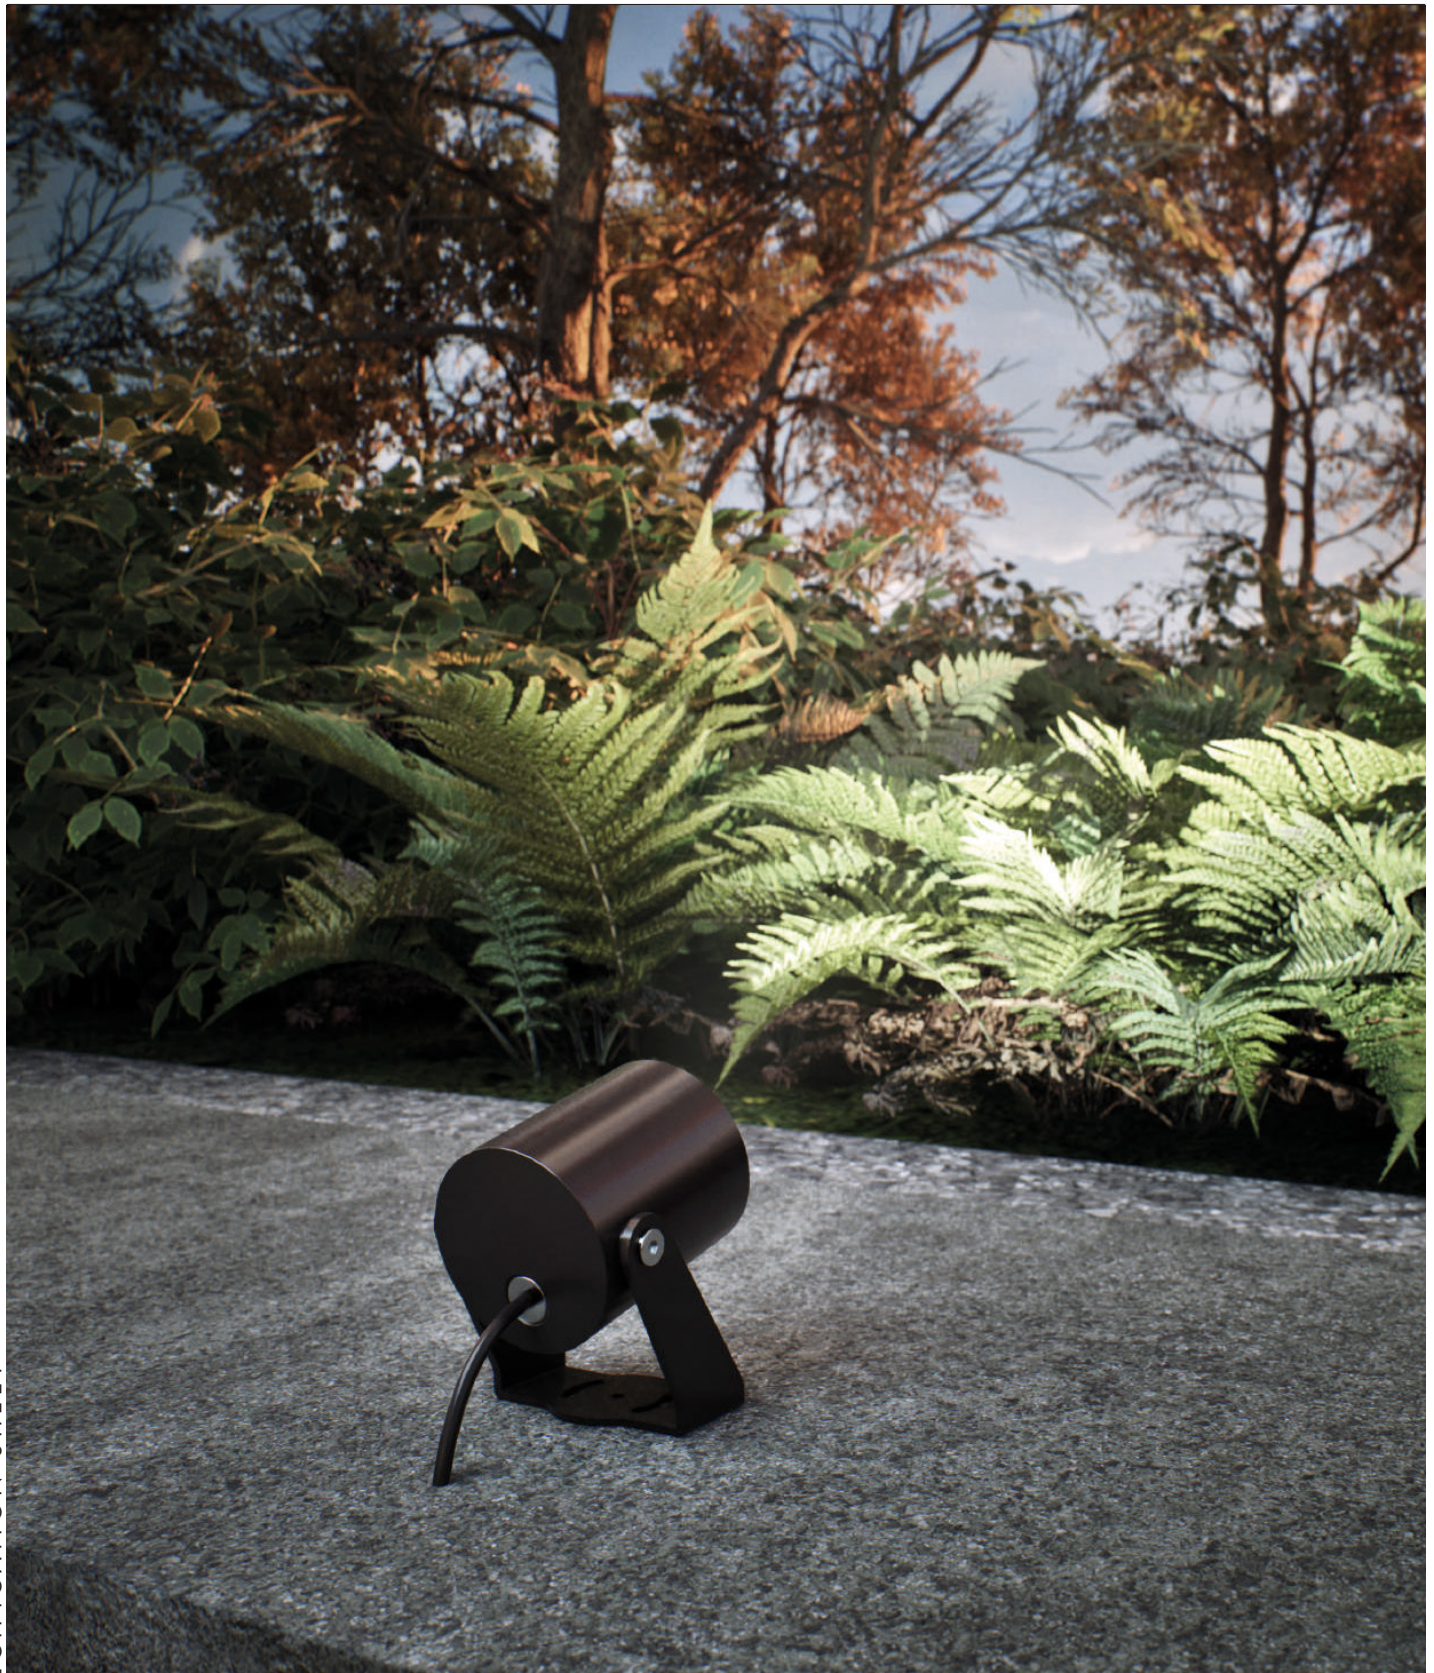

SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM
Last updated: 07/25/24

BLOOM™ MAXI

SPOTLIGHT

TYPE:

PROJECT NAME:



Fixture Specifications

Protection . IP 66 - IK 09

Body . Anticorodal turning aluminum 6000 Serie, for greater corrosion resistance


Screen . Extra-clear transparent Glass 12mm (0.47")

Seals . EPDM rubber


Screws . Chromed Brass

Paint / Finishing . Anti-corrosive UV stabilised polyester powder


Finishes




00
PURE WHITE
RAL 9016



10
WHITE
RAL 9010



24
BRONZE




25
RUST



01
BLACK
RAL 9005




30
ANTHRACITE




35
SLATE GREY



40
GREY
RAL 9006



55
GREEN COOL
MINT
RAL 6019

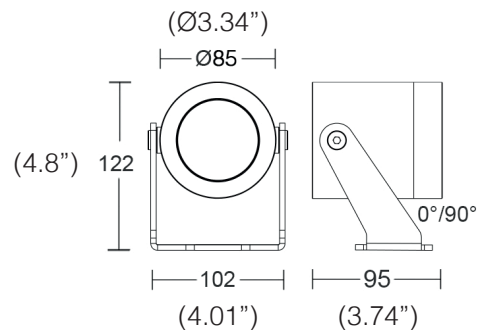

ORDERING INFO

BLOOM MAXI

Model (Order Code)	Finish Options	Optic Options	Accessories	LED	Remote Driver Options
<input type="radio"/> BLOOM MAXI	<input type="radio"/> 00: Pure White <input type="radio"/> 10: White <input type="radio"/> 24: Bronze <input type="radio"/> 25: Rust <input type="radio"/> 01: Black <input type="radio"/> 30: Anthracite <input type="radio"/> 35: Slate Grey <input type="radio"/> 40: Grey <input type="radio"/> 55: Green Cool Mint	<input type="radio"/> NB: Narrow Beam 10° <input type="radio"/> MB: Medium Beam 26° <input type="radio"/> WB: Wide Beam 56°	<input type="radio"/> Spike <input type="radio"/> Branch Belt	<input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> 120V LTE <input type="radio"/> 120V-277V 0-10V (Universal Voltage)



SPECIFICATION SHEET

Luminart®










WWW.LUMINARTLIGHTING.COM
Last updated: 07/25/24


BLOOM™ MAXI

SPOTLIGHT

TYPE:

PROJECT NAME:

<i>beam</i>	<i>class</i>	<i>W</i>	<i>source</i>	<i>fixture</i>	<i>CCT LED</i>	<i>CRI</i>
 NB Spot/10°	III	15	1550 lm	1080 lm	2700K	80
 NB Spot/10°	III	15	1620 lm	1130 lm	3000K	80
 NB Spot/10°	III	15	1670 lm	1190 lm	4000K	80
 MB Flood/26°	III	15	1550 lm	1080 lm	2700K	80
 MB Flood/26°	III	15	1620 lm	1130 lm	3000K	80
 MB Flood/26°	III	15	1670 lm	1190 lm	4000K	80
 WB Wide Flood/56°	III	15	1550 lm	1000 lm	2700K	80
 WB Wide Flood/56°	III	15	1620 lm	1040 lm	3000K	80
 WB Wide Flood/56°	III	15	1670 lm	1100 lm	4000K	80

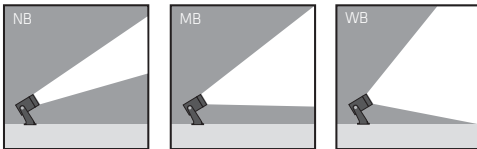

Accessories



SPIKE



BRANCH
BELT



SPECIFICATION SHEET