

# ORION™ TL

POLES

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

**Luminart®**

WWW.LUMINARTLIGHTING.COM  
Last updated: 07/08/24

# ORION™ TL

POLES

TYPE:

PROJECT NAME:



## Fixture Specifications

Protection . IP 65 - IK 08

Body Pole . Extruded aluminium alloy  
Body/Base . Die-cast aluminium alloy

Screen . Opal polycarbonate

Seals . Closed-cell EPDM rubber

Screws . Stainless steel A2

Paint / Finishing . Anti-corrosive UV stabilised polyester powder

## Finishes



PURE WHITE  
RAL 9016



BLACK  
RAL 9005



WHITE  
RAL 9010



BRONZE



RUST



ANTHRACITE



SLATE GREY



GREY  
RAL 9006

## Assembly

Ground connection system with anchoring brackets to be ordered separately. The orientation is independent of the layout of the ground fixing holes.

## Application



Residential areas




Cycle  
Pedestrian paths



Access areas



Parks  
Gardens

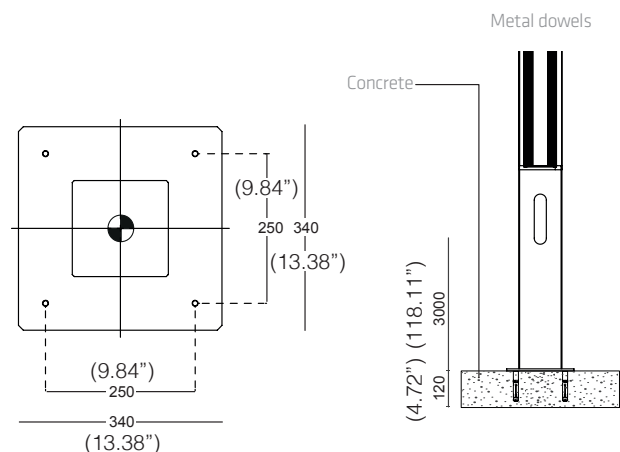







SPECIFICATION SHEET





# ORION™ TL

POLES

TYPE:

PROJECT NAME:

|   |              |   |     |         |         |        |    |
|---|--------------|---|-----|---------|---------|--------|----|
|  | 1 WAY >120°  | I | 21W | 2160 lm | 1010 lm | 3000 K | 80 |
|  | 1 WAY >120°  | I | 21W | 2400 lm | 1120 lm | 4000 K | 80 |
|  | 2 WAYS >120° | I | 40W | 4320 lm | 2020 lm | 3000 K | 80 |
|  | 2 WAYS >120° | I | 40W | 4800 lm | 2240 lm | 4000 K | 80 |
|  | 360°         | I | 80W | 8640 lm | 4040 lm | 3000 K | 80 |
|  | 360°         | I | 80W | 9600 lm | 4490 lm | 4000 K | 80 |

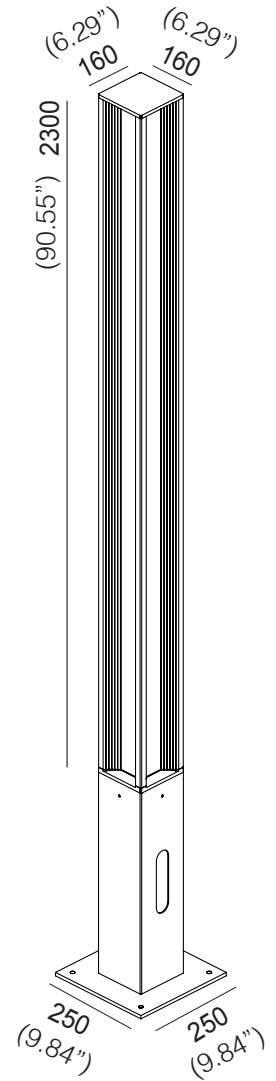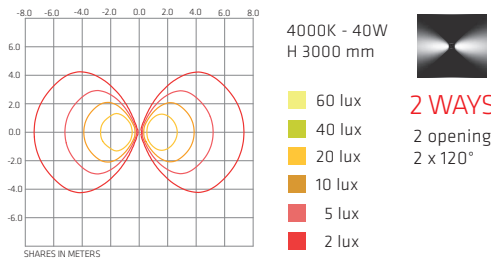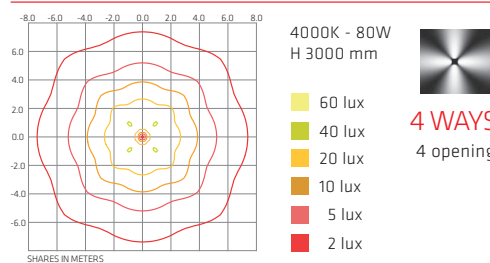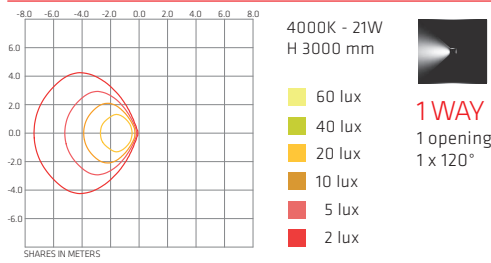

## ORDERING INFO

ORION TL 3000 - - - G - -

| Model (Order Code)                  | Finish Options   | Optic Options  | Accessories                                       | LED  | Dimming Options  |
|-------------------------------------|--|--|---|--|--|
| <input type="radio"/> ORION TL 3000 | <input type="radio"/> 00: Pure White<br><input type="radio"/> 10: White<br><input type="radio"/> 24: Bronze<br><input type="radio"/> 25: Rust<br><input type="radio"/> 01: Black<br><input type="radio"/> 30: Anthracite<br><input type="radio"/> 35: Slate Grey<br><input type="radio"/> 40: Grey | <input type="radio"/> One Way Optic<br><input type="radio"/> Two Ways Optic<br><input type="radio"/> Four Ways Optic | <input type="radio"/> G: Ground Anchoring Bracket | <input type="radio"/> 30: 3000K<br><input type="radio"/> 40: 4000K | <input type="radio"/> 120V LTE<br><input type="radio"/> 120V-277V 0-10V<br>(Universal Voltage) |



SPECIFICATION SHEET