
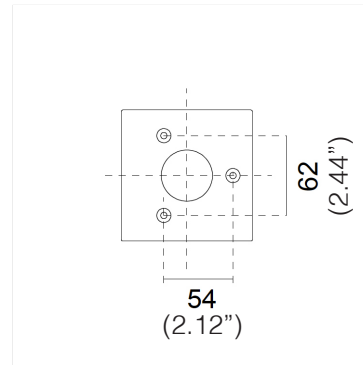


UP & DOWN™ Q

CEILING

TYPE:

PROJECT NAME:

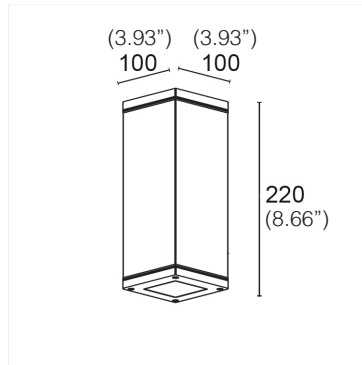

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Ceiling installation

PROTECTION

IP 65 - IK 07

BODY

Die-cast aluminum

SCREEN

Tempered extra-clear glass 6mm (0.23") with silk-screen printing

SEALS

Closed-cell EPDM rubber

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

120-277Vac 50/60Hz

DRIVER

Built-in

POWER MODULE LED

11W

ABSORBED POWER

13W

SOURCE

LED COB

APPARENT EFFICIENCY

91 %

INSULATION CLASS

I

OVERVOLTAGE PROTECTION

2kv-4kv

CRI

>80

STEP MACADAM

3

LIFE TIME TM-21

L80B10 50000h

PHOTOBIOLOGICAL RISK

RG1

COLORS



00
PURE
WHITE RAL
9016



01
BLACK RAL
9005



10
WHITE RAL
9010



24
BRONZE



25
RUST



30
ANTHRACITE



35
SLATE
GREY



40
GREY RAL
9006

SPECIFICATION SHEET

Luminart®










WWW.LUMINARTLIGHTING.COM
Last updated: 07/08/24

UP & DOWN™ Q

CEILING

TYPE:

PROJECT NAME:

Beam	Class	IP	W	Fixture	CCT LED
 Downlight Flood/10°	I	65	13W	1171 lm	2700K
 Downlight Flood/26°	I	65	13W	1177 lm	2700K
 Downlight Wide Flood/56°	I	65	13W	1074 lm	2700K
 Downlight Flood/10°	I	65	13W	1233 lm	3000K
 Downlight Flood/26°	I	65	13W	1239 lm	3000K
 Downlight Wide Flood/56°	I	65	13W	1131 lm	3000K
 Downlight Flood/10°	I	65	13W	1283 lm	4000K
 Downlight Flood/26°	I	65	13W	1288 lm	4000K
 Downlight Wide Flood/56°	I	65	13W	1177 lm	4000K

ORDERING INFO

UP&DOWN Q

Model (Order Code)	Optic Options	Finish Options	LED	Dimming Options
<input type="radio"/> UP&DOWN Q	<input type="radio"/> 10: Downlight Flood / 10° <input type="radio"/> 10: Downlight Flood / 26° <input type="radio"/> 10: Downlight Flood / 56°	<input type="radio"/> 00: Pure White <input type="radio"/> 01: Black <input type="radio"/> 10: White <input type="radio"/> 24: Bronze <input type="radio"/> 25: Rust <input type="radio"/> 30: Anthracite <input type="radio"/> 35: Slate Grey <input type="radio"/> 40: Grey	<input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> 120V LTE <input type="radio"/> 120V-277V 0-10V (Universal Voltage)



SPECIFICATION SHEET