
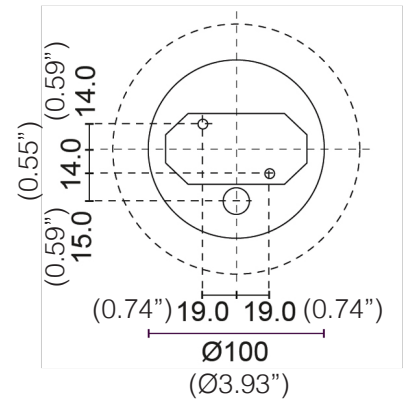


# UP & DOWN™

CEILING

TYPE:

PROJECT NAME:

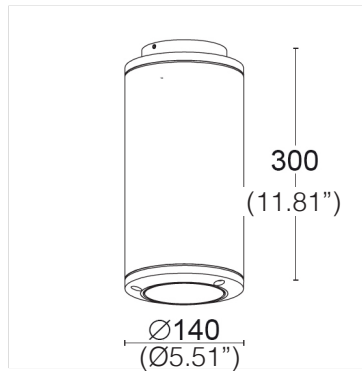

## FIXTURE SPECIFICATIONS

### ASSEMBLY / USAGE

Ceiling installation

### PROTECTION

IP 66 - IK 08

### BODY

Die-cast aluminum

### SCREEN

Tempered extra-clear glass 6mm (0.23") with silk-screen printing

### SEALS

Closed-cell EPDM rubber

### SCREWS

Stainless steel A2

### PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

## ELECTRICAL SPECIFICATIONS

### POWER SUPPLY

120-277Vac 50/60Hz

### DRIVER

Built-in

### POWER MODULE LED

15W

### ABSORBED POWER

17W

### SOURCE

LED COB

### APPARENT EFFICIENCY

76 %

### INSULATION CLASS

I

### CRI

>80

### STEP MACADAM

3

### LIFE TIME TM-21

L80B10 50000h

### PHOTOBIOLOGICAL RISK

RG1

## COLORS



00  
PURE  
WHITE RAL  
9016



01  
BLACK RAL  
9005



10  
WHITE RAL  
9010



24  
BRONZE



25  
RUST



30  
ANTHRACITE



35  
SLATE GREY



40  
GREY RAL  
9006

SPECIFICATION SHEET

**Luminart®**










WWW.LUMINARTLIGHTING.COM  
Last updated: 07/08/24

# UP & DOWN™

CEILING

TYPE:

PROJECT NAME:

Beam	Class	IP	W	Fixture	CCT LED
 Downlight Flood/10°	I	66	17W	1383 lm	2700K
 Downlight Flood/38°	I	66	17W	1446 lm	2700K
 Downlight Wide Flood/56°	I	66	17W	1518 lm	2700K
 Downlight Flood/10°	I	66	17W	1456 lm	3000K
 Downlight Flood/38°	I	66	17W	1523 lm	3000K
 Downlight Wide Flood/56°	I	66	17W	1598 lm	3000K
 Downlight Flood/10°	I	66	17W	1513 lm	4000K
 Downlight Flood/38°	I	66	17W	1583 lm	4000K
 Downlight Wide Flood/56°	I	66	17W	1661 lm	4000K

## ORDERING INFO

Model (Order Code)	Optic Options	Finish Options	LED	Dimming Options
<input type="radio"/> UP&DOWN	<input type="radio"/> 10: Downlight Flood / 10° <input type="radio"/> 10: Downlight Flood / 26° <input type="radio"/> 10: Downlight Flood / 56°	<input type="radio"/> 00: Pure White <input type="radio"/> 01: Black <input type="radio"/> 10: White <input type="radio"/> 24: Bronze <input type="radio"/> 25: Rust <input type="radio"/> 30: Anthracite <input type="radio"/> 35: Slate Grey <input type="radio"/> 40: Grey	<input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> 120V LTE <input type="radio"/> 120V-277V 0-10V (Universal Voltage)



SPECIFICATION SHEET