

WETT™

RECESSED INGROUND SUBMERSIBLE

TYPE:

PROJECT NAME:

LIGHTING FEATURES

LED COLOUR	2200K, 2700K, 3000K, 4000K, Red, Green, Blue
CRI	>80 (2200K, 2700K, 3000K, 4000K)
OPTICS	10°, 36°, 60°, Diffused, 10° x 55°
3000K REAL OUTPUT FLUX	2,2W 127lm 36°
AVERAGE LED LIFE	50.000h L80 B10

MECHANICAL FEATURES


WEIGHT	kg 0,55
FINISHES	Steel

INSTALLATION *Recessed in ground with housing box, recessed in brickwork with housing box, installation out of water with standard housing box, permanent immersion installation with IP68 housing box*

MATERIAL *AISI 316L stainless steel body, AISI 316L stainless steel trim, transparent tempered glass and PMMA lens*

GENERAL FEATURES

OPERATING TEMPERATURE	-10°C +45°C
INGRESS PROTECTION	IP68
IMPACT RESISTANCE	IK08
GLOW WIRE TEST	960°C
APPLIANCE CLASS	II

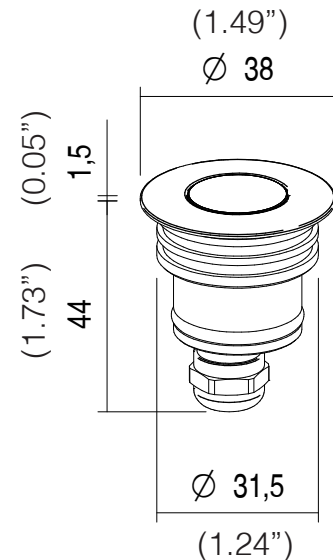

ORDERING INFO

Model (Order Code)	Structure Finish	Optic Options	Accessories	Filter Options	LED	Remote Driver
<input type="radio"/> WETT 2.2W	<input type="radio"/> S: AISI 316L Stainless Steel Marine Grade	<input type="radio"/> 10: 10° <input type="radio"/> 36: 36° <input type="radio"/> 60: 60° <input type="radio"/> D: Diffused <input type="radio"/> 1055: 10° x 55°	<input type="radio"/> CA832: Housing Box <input type="radio"/> CAW32: Housing Box <input type="radio"/> CAI32: Housing Box	<input type="radio"/> HC: Honeycombo <input type="radio"/> BC: Black & Clear <input type="radio"/> BD: Black & Diffused	<input type="radio"/> 22: 2200K <input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K <input type="radio"/> R: Red <input type="radio"/> G: Green <input type="radio"/> B: Blue	<input type="radio"/> 120V LTE <input type="radio"/> 120-277V 0-10V




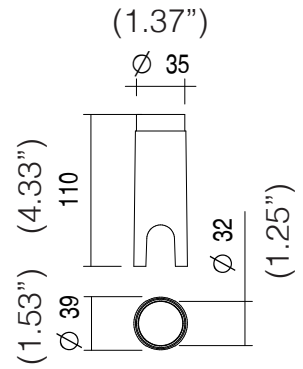
SPECIFICATION SHEET


Luminart®


WWW.LUMINARTLIGHTING.COM
Last updated: 08/06/24



to be chosen


CODE	CAW32	
TPOLOGY	Housing box	 kg 0,09
MATERIAL	PVC	

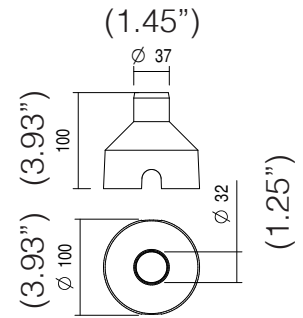

CODE	CAI32	
TPOLOGY	Housing box	 kg 0,06
MATERIAL	ABS	



CODE	CA832	
TPOLOGY	IP68 Housing box	  kg 0,06
MATERIAL	PVC	

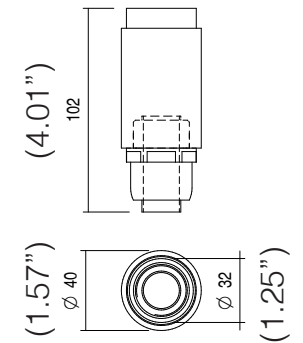


TYPE:


PROJECT NAME:

to be chosen

<i>CODE</i>	HC
<i>TPOLOGY</i>	<i>Honeycomb filter</i>
NOTE	<i>with 10°, 36°, 60°, 10°x 55° lens only</i>



<i>CODE</i>	BC
<i>TPOLOGY</i>	<i>Black & Clear filter</i>
NOTE	<i>with 10°, 36°, 60° lens only</i>



<i>CODE</i>	BD
<i>TPOLOGY</i>	<i>Black & Diffused filter</i>
NOTE	<i>with diffused lens only</i>

