
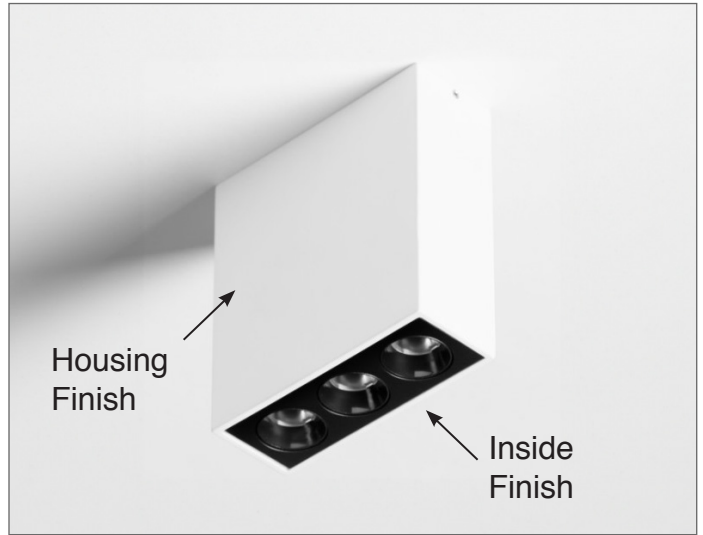


SLIVER™ 3

CEILING

TYPE:

PROJECT NAME:

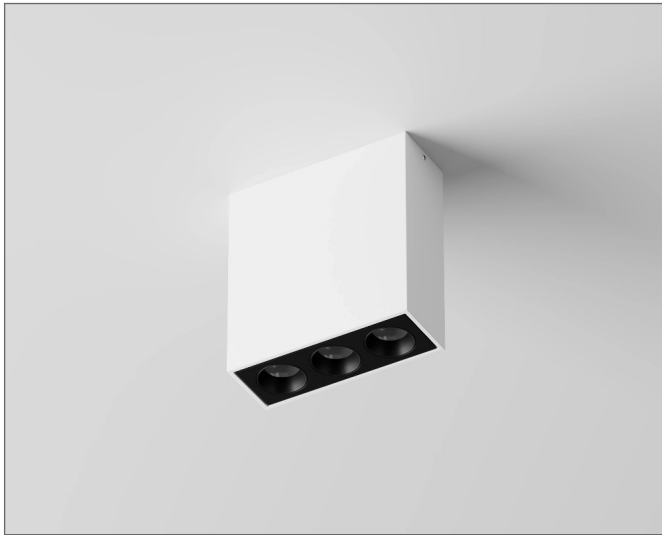

Sliver is a line of lighting fixtures comprising 2 models that differ in size and power. Sliver 3 provides a universal beam of light with a 48-degree angle, ensuring even illumination. The fixtures feature a minimalist design, perfect for modern arrangements.

Color rendering: CRI 90

Installation: Surface mounted, Ceiling

Materials: Aluminum

Ingress protection: IP20



Electrical: High efficiency electronic power supply, rated 50,000 hours 120V-277V

Input [W] 6.5W

Lum. flux of light source [lm] 48° 563 lm

Finish options:

Black, White, Dust, Terracotta, Ocean Grey, Gold



SPECIFICATION SHEET

ORDERING INFO

L543.1331

B

Model (Order Code)	Housing Finish	Inside Finish	LED	Installation Type	Dimming Options
<input type="radio"/> L543.1331 6.5W	<input type="radio"/> B: Black <input type="radio"/> W: White <input type="radio"/> T: Terracotta <input type="radio"/> OG: Ocean Grey <input type="radio"/> D: Dust <input type="radio"/> G: Gold	<input type="radio"/> B: Black	<input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> Remote driver no blackplate <input type="radio"/> Integral driver with 4.5" square backplate	<input type="radio"/> 120V LTE <input type="radio"/> 120V-277V 0-10V





SLIVER™ 4

CEILING

TYPE:

PROJECT NAME:

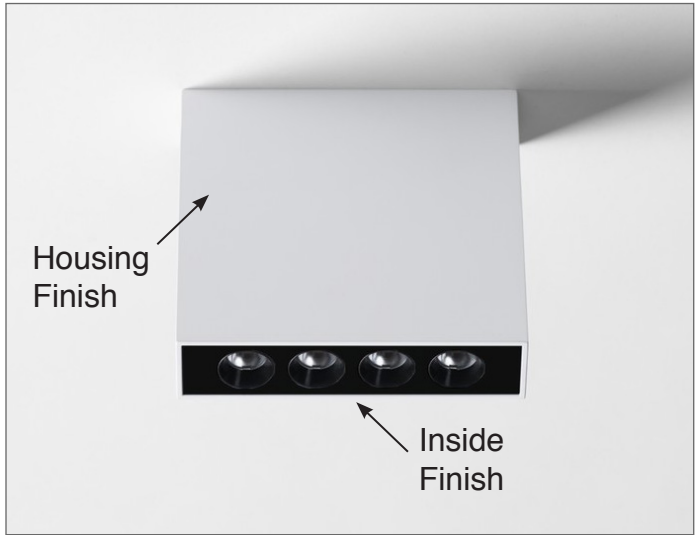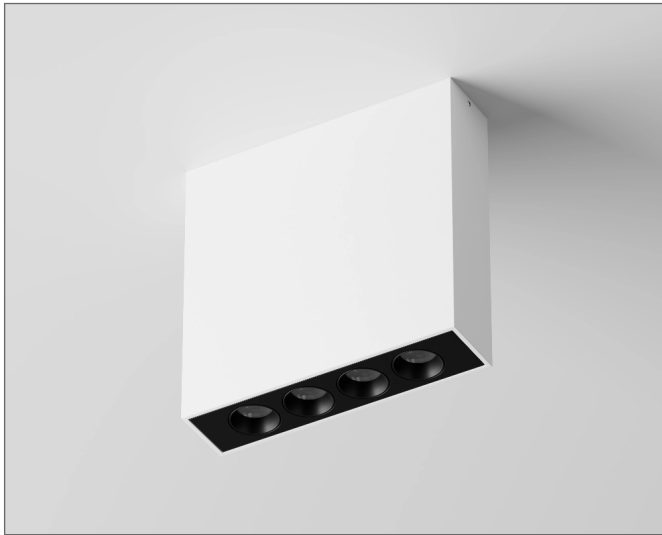

Sliver is a line of lighting fixtures comprising 2 models that differ in size and power. Sliver 4 provides a universal beam of light with a 50-degree angle, ensuring even illumination. The fixtures feature a minimalist design, perfect for modern arrangements.

Color rendering: CRI 90

Installation: Surface mounted, Ceiling

Materials: Aluminum

Ingress protection: IP20


Electrical: High efficiency electronic power supply, rated 50,000 hours 120V-277V

Input [W] 11W

Lum. flux of light source [lm] 50° 794 lm

Finish options:

Black, White, Dust, Terracotta, Ocean Grey, Gold

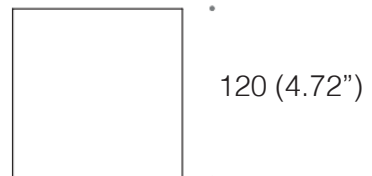

120
(4.72")

SPECIFICATION SHEET

ORDERING INFO

L543.2755

B

Model (Order Code)	Housing Finish	Inside Finish	LED	Installation Type	Dimming Options
<input type="radio"/> L543.2755 11W	<input type="radio"/> B: Black <input type="radio"/> W: White <input type="radio"/> T: Terracotta <input type="radio"/> OG: Ocean Grey <input type="radio"/> D: Dust <input type="radio"/> G: Gold	<input type="radio"/> B: Black	<input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> Remote driver no blackplate <input type="radio"/> Integral driver with 4.5" square backplate	<input type="radio"/> 120V LTE <input type="radio"/> 120V-277V 0-10V

