

ANTON FLAT™ R

OUTDOOR CEILING

TYPE:

PROJECT NAME:



Finish options:

Black, White, Dust, Terracotta, Ocean Grey, Gold



Input [W]		10W
Lum. flux of light source [lm]	82°	530 lm

The minimalist-shaped surface-mounted spot is so small that it becomes almost invisible, but the power of the integrated light source provides sufficient illumination. It is particularly suitable for wet areas, including under the shower, thanks to its IP65 protection rating. It works well as both main or supplementary lighting in private interiors and public spaces.


Color rendering: CRI 90

Materials: Aluminum, polycarbonate

Ingress protection: IP65

Electrical: High efficiency electronic power supply, rated 50,000 hours 120V-277V

Installation Note: Fixture includes 4.72" round blackplate. Install on a standard 4" Octagonal junction box.

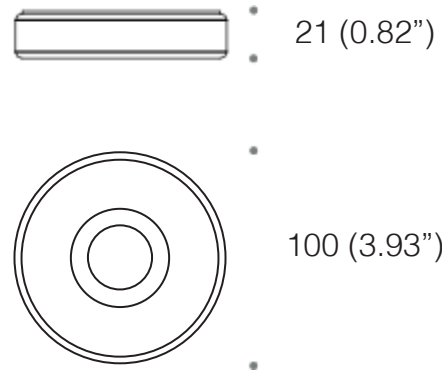

SPECIFICATION SHEET

ORDERING INFO

L543.3832	-	-	-	-
Model (Order Code)	Structure Finishes	Optic Options	LED	Dimming Options
<input type="radio"/> L543.3832 10W	<input type="radio"/> 12: Black <input type="radio"/> 13: White <input type="radio"/> 21: Terracotta <input type="radio"/> 22: Ocean Grey <input type="radio"/> 23: Dust <input type="radio"/> 80: Gold	<input type="radio"/> 82: 82°	<input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> 120V LTE <input type="radio"/> 120V-277V 0-10V




ANTON FLAT™ Q

OUTDOOR CEILING

TYPE:

PROJECT NAME:

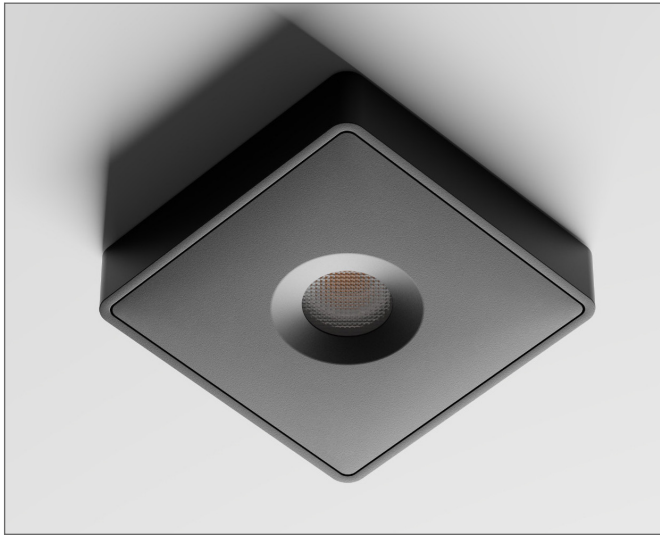

Finish options:

Black, White, Dust, Terracotta, Ocean Grey, Gold



Input [W] 10W

Lum. flux of light source [lm] 82° 534 lm

The minimalist-shaped surface-mounted spot is so small that it becomes almost invisible, but the power of the integrated light source provides sufficient illumination. It is particularly suitable for wet areas, including under the shower, thanks to its IP65 protection rating. It works well as both main or supplementary lighting in private interiors and public spaces.


Color rendering: CRI 90

Materials: Aluminum, polycarbonate

Ingress protection: IP65

Electrical: High efficiency electronic power supply, rated 50,000 hours 120V-277V

Installation Note: Fixture includes 4"x4" blackplate. Install on a standard 4" Octagonal junction box.

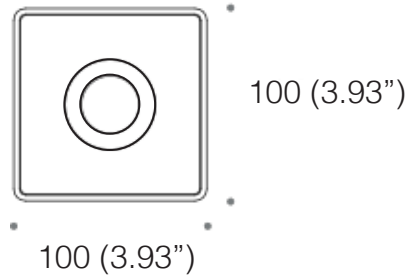

SPECIFICATION SHEET

ORDERING INFO

L543.3830

Model (Order Code)	Structure Finishes	Optic Options	LED	Dimming Options
<input type="radio"/> L543.3830 10W	<input type="radio"/> 12: Black <input type="radio"/> 13: White <input type="radio"/> 21: Terracotta <input type="radio"/> 22: Ocean Grey <input type="radio"/> 23: Dust <input type="radio"/> 80: Gold	<input type="radio"/> 82: 82°	<input type="radio"/> 27: 2700K <input type="radio"/> 30: 3000K <input type="radio"/> 40: 4000K	<input type="radio"/> 120V LTE <input type="radio"/> 120V-277V 0-10V



ANTON FLAT™

OUTDOOR CEILING

TYPE:

PROJECT NAME:



SPECIFICATION SHEET