BLANKET™

SUSPENSION

TYPE:

PROJECT NAME:

SPECIFICATION SHEET

BLANKET™ 600

SUSPENSION 12.5W

TYPE:

PROJECT NAME:

size	Blanket 600
luminaire size	590 × 590 (23.22”x23.22”)
wattage	↓12.5 W – 10 × ↓1 W
luminous flux	↓950 lm
UGR	<19

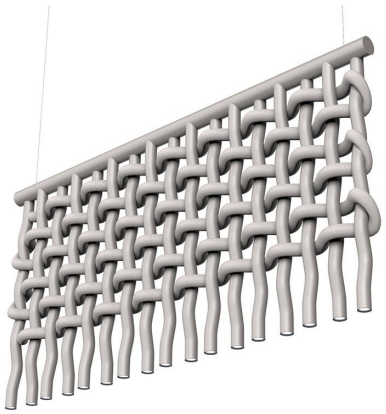

Technical information

IP20 | >80 CRI | SDCM 3 | STANDARD

light distribution – down	30°
luminous efficiency	76lm/W
electrical control	TRIAC
	0-10V
color temperature	3000K
	5000K
LED module Housing Finish	RAL 3012 Beige Red
	RAL 7015 Slate Grey
	RAL 7046 Telegrey 2
	RAL 9001 Cream
	RAL 1002 Sand Yellow
	RAL 8004 Copper Brown

Front View

Side View

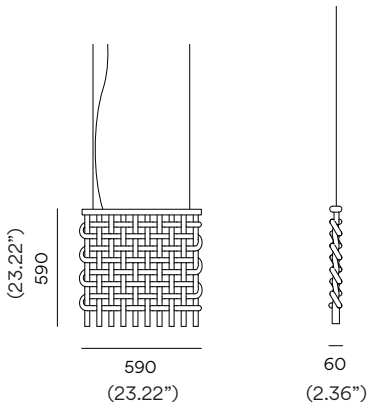

RAL colors

3012 7015 7046 9001 1002 8004

ORDERING INFO

Model (Order Code)	LED Module Housing Finish	LED	Driver Options
◯ Blanket L72-600 12.5W	◯ RAL 3012 Beige Red	◯ 3000K	◯ 120V Phase Dimming
	◯ RAL 7015 Slate Grey	◯ 5000K	◯ 120V 0-10V Dimming
	◯ RAL 7046 Telegry 2		◯ 277V 0-10V Dimming
	◯ RAL 9001 Cream		
	◯ RAL 1002 Sand Yellow		
	◯ RAL 8004 Copper Brown		

Intertek

SPECIFICATION SHEET

BLANKET™ 1200

SUSPENSION 25W

TYPE:

PROJECT NAME:

size	Blanket 1200
luminaire size	1195×590 (47.04"x23.22")
wattage	↓25 W – 20 × ↓1 W
luminous flux	↓1900 lm
UGR	<19

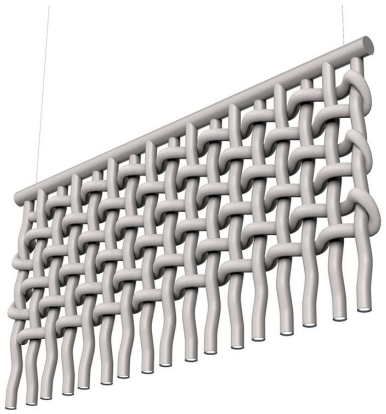

Technical information

IP20 | >80 CRI | SDCM 3 | STANDARD

light distribution – down	30°
luminous efficiency	76lm/W
electrical control	TRIAC
	0-10V
color temperature	3000K
	5000K
LED module Housing Finish	RAL 3012 Beige Red
	RAL 7015 Slate Grey
	RAL 7046 Telegrey 2
	RAL 9001 Cream
	RAL 1002 Sand Yellow
	RAL 8004 Copper Brown

RAL colors

3012 7015 7046 9001 1002 8004

Front View



Side View



ORDERING INFO

Model (Order Code)	LED Module Housing Finish	LED	Driver Options
◯ Blanket L72-1200 25W	◯ RAL 3012 Beige Red	◯ 3000K	◯ 120V Phase Dimming
	◯ RAL 7015 Slate Grey	◯ 5000K	◯ 120V 0-10V Dimming
	◯ RAL 7046 Telegry 2		◯ 277V 0-10V Dimming
	◯ RAL 9001 Cream		
	◯ RAL 1002 Sand Yellow		
	◯ RAL 8004 Copper Brown		

Intertek

SPECIFICATION SHEET