




PROJECT NAME:

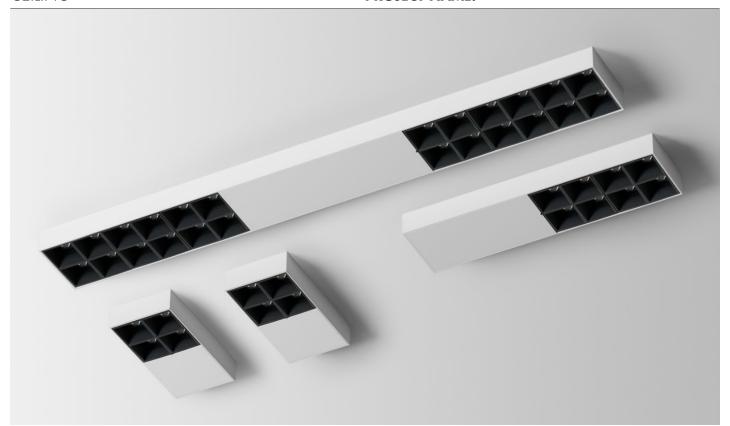

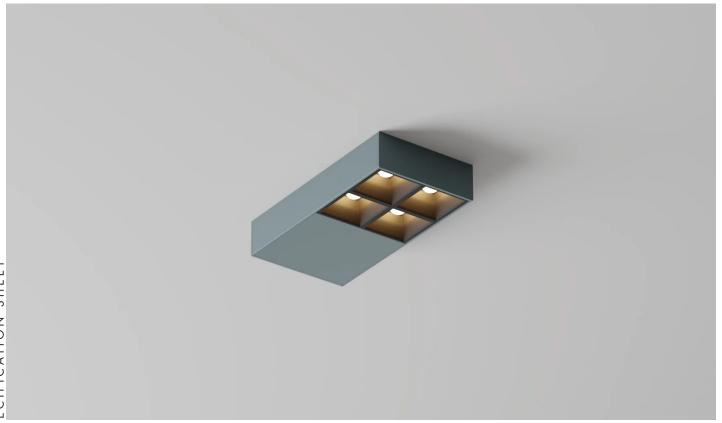

PROJECT NAME:

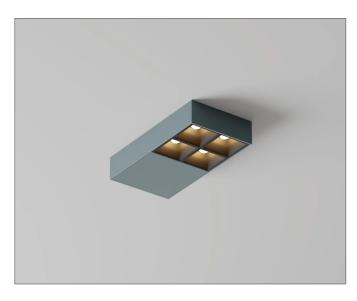

Finish options:

Black, White, Dust, Terracotta, Ocean Grey, Gold

Black White	Dust	Terracotta	Ocean Grey	Gold
-------------	------	------------	---------------	------

Input [W]		9.6W
Lum flux of light course [lm]	52°	901 lm
Lum. flux of light source [lm]	77°	830 lm

Cell is a group of surface-mounted luminaires designed for modern office and public spaces. Despite its simple, rectangular shape and a height of only 30mm (1.18"), it conceals a powerful light output without the tiring glare effect. Therefore, it is perfect for long hours of computer work but also works well for illuminating corridors or other areas where groups of people gather.


Color rendering: CRI 90

Materials: Aluminum

Ingress protection: IP20

Electrical: High efficiency electronic power supply, rated

50,000 hours 120V-277V



30 (1.18")

SPECIFICATION SHEET

ORDERING INFO L543.3340	-	-	-	-
Model (Order Code)	Structure Finishes	Optic Options	LED	Dimming Options
◯ L543.3340 9.6W	◯ 12: Black	○ 52: 52°	○30:3000K	◯ 120V LTE
	◯ 13: White	○77:77°	○ 40: 4000K	O 120V-277V 0-10V
	○ 21: Terracotta			
	22: Ocean Grey			
	O 23: Dust			(1)
	○ 80: Gold			Intert



PROJECT NAME:



Finish options:

Black, White, Dust, Terracotta, Ocean Grey, Gold

Black White	Dust	Terracotta	Ocean Grey	Gold	The state of the s
-------------	------	------------	---------------	------	--

Input [W]		19W
Lum flux of light course [Im]	52°	1800 lm
Lum. flux of light source [lm]	77°	1660 lm

Cell is a group of surface-mounted luminaires designed for modern office and public spaces. Despite its simple, rectangular shape and a height of only 30mm (1.18"), it conceals a powerful light output without the tiring glare effect. Therefore, it is perfect for long hours of computer work but also works well for illuminating corridors or other areas where groups of people gather.

Color rendering: CRI 90

Materials: Aluminum


Ingress protection: IP20

Electrical: High efficiency electronic power supply, rated

50,000 hours 120V-277V

SHEET

SPECIFICATION

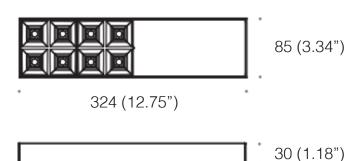


ORDERING INFO				
L543.3341	-	-	-	-
Model (Order Code)	Structure Finishes	Optic Options	LED	Dimming Options
○ L543.3341 19W	12: Black	○ 52: 52°	○30:3000K	○ 120V LTE
	◯ 13: White	○77:77°	○ 40: 4000K	O 120V-277V 0-10V
	○ 21: Terracotta			
	22: Ocean Grey			_
	○ 23: Dust			(II)

O 80: Gold



PROJECT NAME:

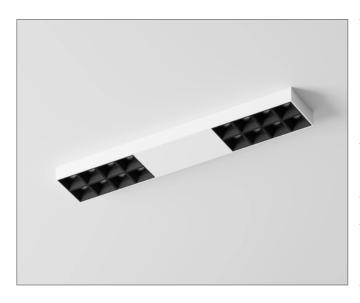

Finish options:

Black, White, Dust, Terracotta, Ocean Grey, Gold

Black White	Dust	Terracotta	Ocean Grey	Gold
-------------	------	------------	---------------	------

Input [W]		19W
Lum flow of limbs course [lm]	52°	1220 lm
Lum. flux of light source [lm]	77°	1140 lm

Cell is a group of surface-mounted luminaires designed for modern office and public spaces. Despite its simple, rectangular shape and a height of only 30mm (1.18"), it conceals a powerful light output without the tiring glare effect. Therefore, it is perfect for long hours of computer work but also works well for illuminating corridors or other areas where groups of people gather.


Color rendering: CRI 90

Materials: Aluminum

Ingress protection: IP20

Electrical: High efficiency electronic power supply, rated


50,000 hours 120V-277V

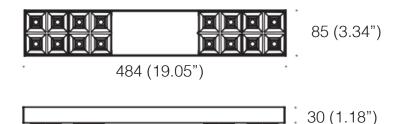

ORDERING INFO L543.3344 LED Model (Order Code) Structure Finishes Optic Options **Dimming Options** OL543.3344 19W 12: Black ○ 52: 52° ○30:3000K ○ 120V LTE 13: White ○77:77° ○40: 4000K O 120V-277V 0-10V 21: Terracotta 22: Ocean Grey ○ 23: Dust O 80: Gold



PROJECT NAME:

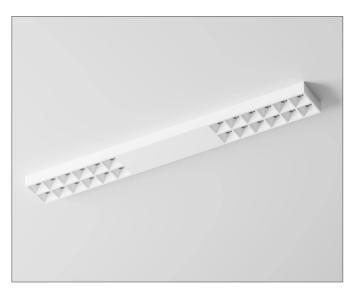

Finish options:

Black, White, Dust, Terracotta, Ocean Grey, Gold

Black White	Dust	Terracotta	Ocean Grey	Gold
-------------	------	------------	---------------	------

Input [W]		26W
Lum flow of limbs course [lm]	52°	1840 lm
Lum. flux of light source [lm]	77°	1710 lm

Cell is a group of surface-mounted luminaires designed for modern office and public spaces. Despite its simple, rectangular shape and a height of only 30mm (1.18"), it conceals a powerful light output without the tiring glare effect. Therefore, it is perfect for long hours of computer work but also works well for illuminating corridors or other areas where groups of people gather.

Color rendering: CRI 90

Materials: Aluminum

Ingress protection: IP20

Electrical: High efficiency electronic power supply, rated

50,000 hours 120V-277V

	85 (3.34")
724 (28.5")	

ORDERING INFO L543.3347

SHEET

SPECIFICATION

Model (Order Code) OL543.3347 26W

Structure Finishes 12: Black 13: White

21: Terracotta 22: Ocean Grey ○ 23: Dust O 80: Gold

Optic Options ○ 52: 52° ○77:77°

LED ○30:3000K ○40: 4000K

Dimming Options ○ 120V LTE

O 120V-277V 0-10V



□ : 30 (1.18")



PROJECT NAME:



Finish options:

Black, White, Dust, Terracotta, Ocean Grey, Gold



Input [W]		34W
Lum flow of light course [lm]	52°	2450 lm
Lum. flux of light source [lm]	77°	2280 lm

Cell is a group of surface-mounted luminaires designed for modern office and public spaces. Despite its simple, rectangular shape and a height of only 30mm (1.18"), it conceals a powerful light output without the tiring glare effect. Therefore, it is perfect for long hours of computer work but also works well for illuminating corridors or other areas where groups of people gather.

Color rendering: CRI 90

Materials: Aluminum

Ingress protection: IP20

Electrical: High efficiency electronic power supply, rated

50,000 hours 120V-277V

SHEET

SPECIFICATION

		85 (3.34")
•	964 (37.95")	

30 (1.18")

ORDERING INFO L543.3348	_	_	_	_
Model (Order Code)	Structure Finishes	Optic Options	LED	 Dimming Options
Woder (Craer Code)	otractare i micrico	Optio Options	LLD	Diffining Options
○ L543.3348 34W	12: Black	○ 52: 52°	○ 30: 3000K	
	13: White	○77:77°	○ 40: 4000K	O 120V-277V 0-10V
	21: Terracotta			
	22: Ocean Grey			_
	○ 23: Dust			(1)
	○ 80: Gold			Intertek



PROJECT NAME:

