SOL™ RD
ACOUSTICAL SUSPENSION

TYPE:

PROJECT NAME:

Luminart®

SOL™ RD
ACOUSTICAL SUSPENSION

TYPE:

PROJECT NAME:

size	Sol RD1000S	Sol RD1200M Sol RD1500L	Sol RD2000XL
luminaire size	Ø1000×120 (39.37"x4.72")	**M** Ø1150×120 (45.27"x4.72") **L** Ø1500×120 (59.05"x4.72")	Ø1950×120 (76.77"x4.72")
light source size	Ø450×82 (17.71"x3.23")	Ø600×82 (23.62"x3.23")	Ø900×82 (35.43"x3.23")
wattage	30 W (↑9 W ↓21 W)	48 W (↑14 W ↓34 W)	80 W (↑24 W ↓56 W)
luminous flux	↑1000 lm ↓2100 lm	↑1750 lm ↓3500 lm	↑3400 lm ↓5600 lm
UGR	<18	<17	<15

Technical information

	IP20	>80 CRI	SDCM 3	STANDARD

light distribution – up	100°
light distribution – down	95°
luminous efficiency	110 lm/W
electrical control	TRIAC
	0-10V
color temperature	3000K
	4000K
LED Module Housing Finsih	black 7021
	white 9003
shade fabric option	see next page

RD1000S RD1200M RD1500L RD2000XL

120 (4.72")

1000 (39.37")

1150 (45.27")

1500 (59.05")

1950 (76.77")

light distribution
UP & DOWN

■ C0-C180 ■ C90-C270 cd/1000lm
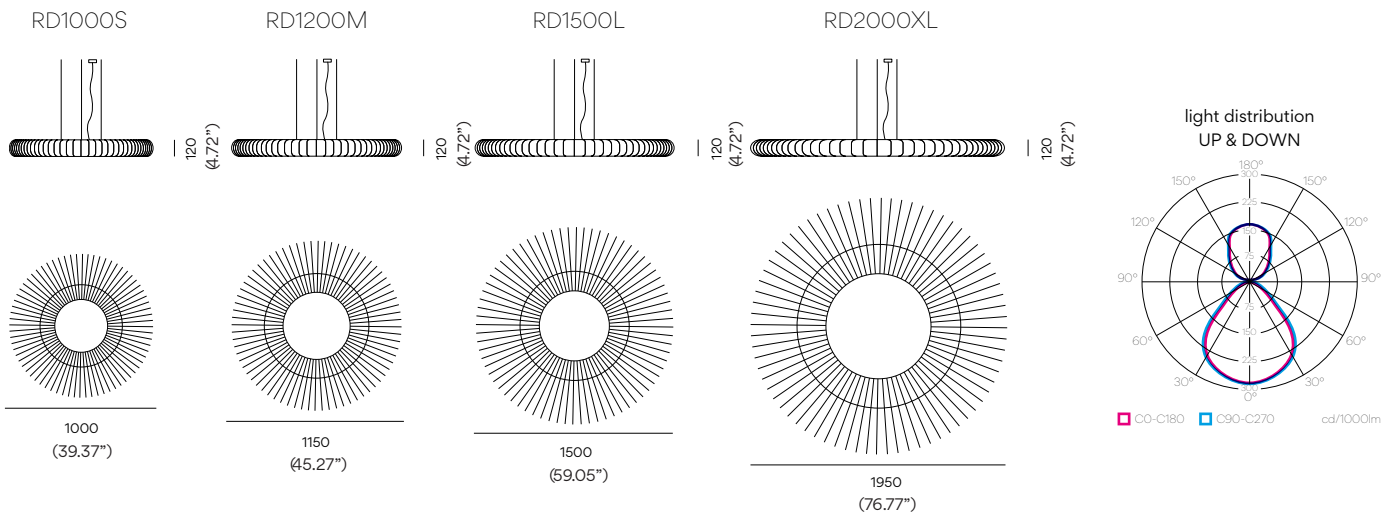
ORDERING INFO

Model (Order Code)	LED	LED Module Housing Finish	Shade Fabric Options *See next page*	Driver Options
◯ Sol L72-RD1000S 30W	◯ 3000K			◯ 120V Phase Dimming
◯ Sol L72-RD1200M 48W	◯ 4000K	◯ Black 7021		◯ 120V 0-10V Dimming
◯ Sol L72-RD1500L 48W		◯ White 9003		◯ 277V 0-10V Dimming
◯ Sol L72-RD200XL 80W				

S P E C I F I C A T I O N   S H E E T

ETL Intertek

Luminart®

SOL™ RD
ACOUSTICAL SUSPENSION

Fabric pallete: ecoPET 12mm

These high-quality sound panels are robust, durable, and have a slightly textile surface that can be washed. They have excellent sound-absorbing properties, are flame-resistant and recyclable. Furthermore, they are environmentally friendly as they are made from recycled PET bottles.

| 1201 Cloud | 1202 Concrete | 1203 Mist | 1204 Iron | 1205 Anthracite | 1206 Ice | 1207 Ocean | 1208 Azure |
| 1209 Sapphire | 1210 Emerald | 1211 Pistachio | 1212 Citrus | 1213 Amber | 1214 Carmine | 1215 Cayenne | 1216 Charcoal |
| 1217 Oat | 1218 Clay | 1219 Biscuit | 1220 Milk | | | | |