



ANTARES™ ROUND

WALL

TYPE:

PROJECT NAME:

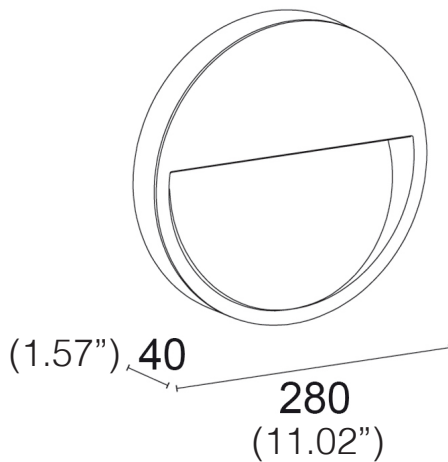

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Wall installation

PROTECTION

IP 66 - IK 09

BODY

Die-cast aluminum

SCREEN

Extra-clear float glass 4mm (0.15") with white diffusing silk-screen printing

SEALS

Closed-cell EPDM rubber

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

120-277Vac 50/60Hz

DRIVER

Built-in

SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

ANTARES™ ROUND

WALL

TYPE:

PROJECT NAME:

DRIVER CURRENT

500mA

POWER MODULE LED

11W

ABSORBED POWER

13W

SOURCE

LED

SOURCE FLUX

3000K: 1800 lm

4000K: 1890 lm

FIXTURE SOURCE

3000K: 630 lm

4000K: 665 lm

APPARENT EFFICIENCY

35 %

OVERVOLTAGE PROTECTION

2kV-3kV

OPERATING TA

50 °

ENERGETIC CLASS

A

CRI

>80

STEP MACADAM

3

LIFE TIME TM-21

L80B10 50000h

BEAM OPENING

Asymmetric >35°

COLORS



00
PURE
WHITE RAL
9016



01
BLACK RAL
9005



10
WHITE RAL
9010



24
BRONZE



25
RUST



30
ANTHRACITE



35
SLATE GREY



40
GREY RAL
9006

ORDERING INFO

L908420W

35

Model (Order Code)

Optic Options

Finish Options

LED

Dimming Options

☐ L908420W

☐ 35: Asymmetric >35°

☐ 00: Pure White RAL9016

☐ 01: Black RAL9005

☐ 10: White RAL9010

☐ 24: Bronze

☐ 25: Rust

☐ 30: Anthracite

☐ 35: Slate Grey

☐ 40: Grey RAL9006

☐ 30: 3000K

☐ 40: 4000K

☐ 120V LTE

☐ 120V-277V 0-10V
(Universal Voltage)



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM