


BLOK™

BOLLARD

TYPE:

PROJECT NAME:

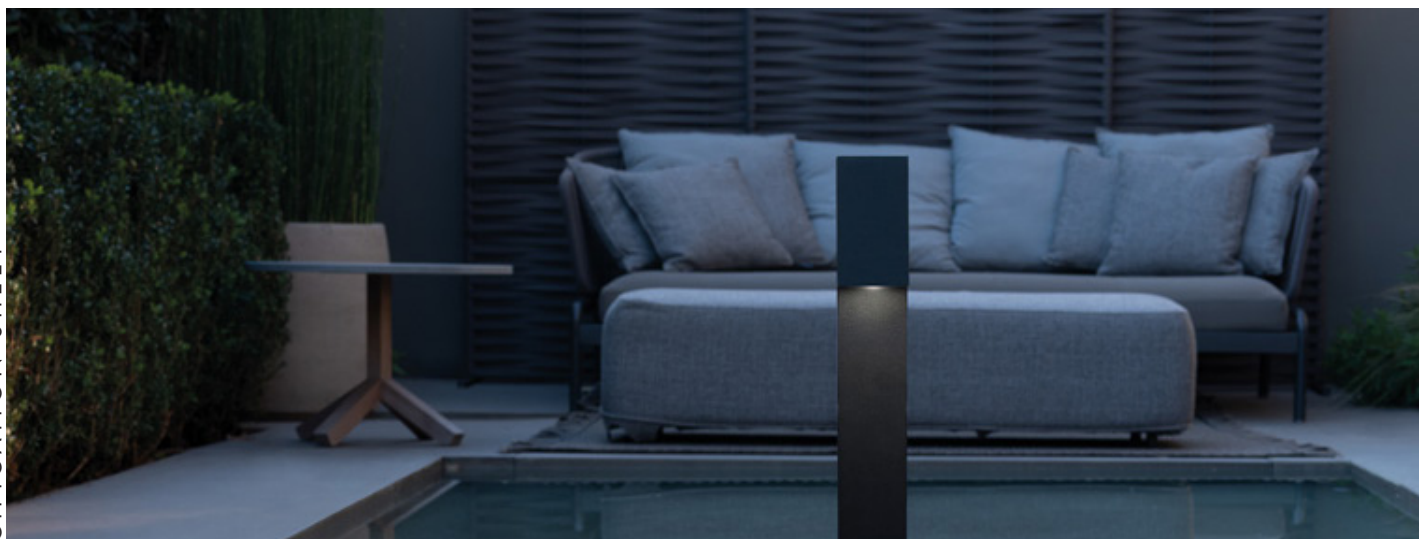

SPECIFICATION SHEET

Luminart®


WWW.LUMINARTLIGHTING.COM
Last updated: 04/22/24

BLOK™

BOLLARD

TYPE:

PROJECT NAME:

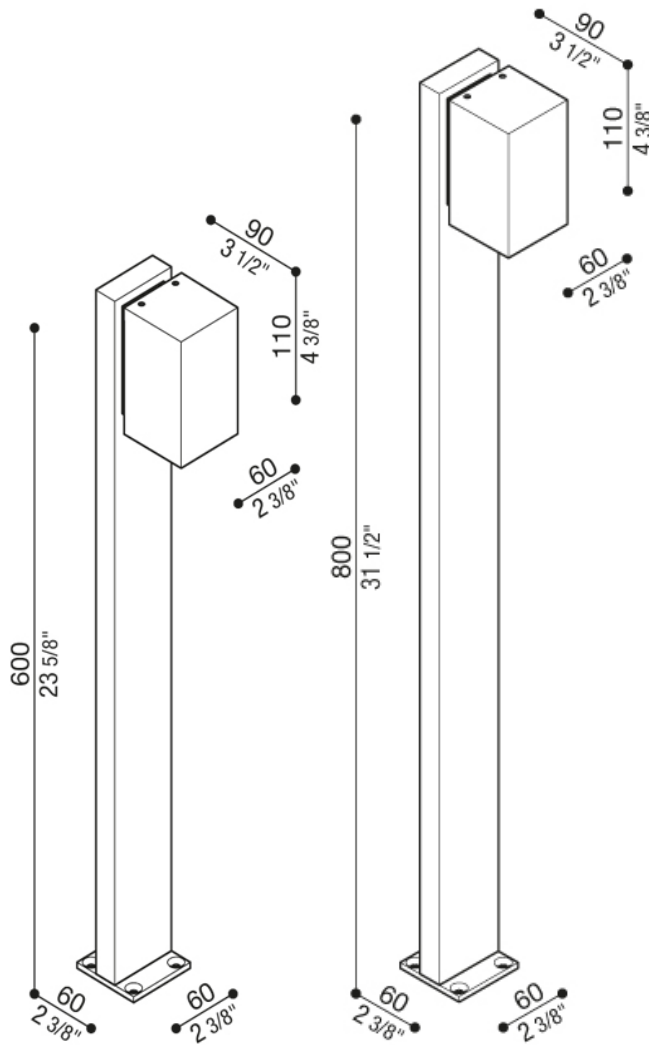

Technical information:

Installation:	Ground
Material:	Aluminum
Treatment:	Sea Treatment
Diffuser type:	Serigraphed Glass
CRI:	>80
LB Factor:	L80B20 - 50.000h
Power consumption [Watt]	3
Source Lumen:	500 lm
Delivered Lumen:	260 lm
Type of protection:	IP66

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Structure Finish	Height Options	Optic Options	LED	Dimming Options
☐ L53LL129	☐ WH: White RAL9010 ☐ CO: Corten ☐ AN: Anthracite RAL7021 ☐ GR: Grey RAL9006	☐ 60: 600mm (23.62") ☐ 80: 800mm (31.49")	☐ Diffuse ☐ Transparent	☐ 2700K ☐ 3000K ☐ 4000K	☐ 120V LTE ☐ 120V 0-10V ☐ 277V 0-10V





*See Details on the next page.



Luminart®

WWW.LUMINARTLIGHTING.COM
Last updated: 04/22/24


Trend H600 Optic

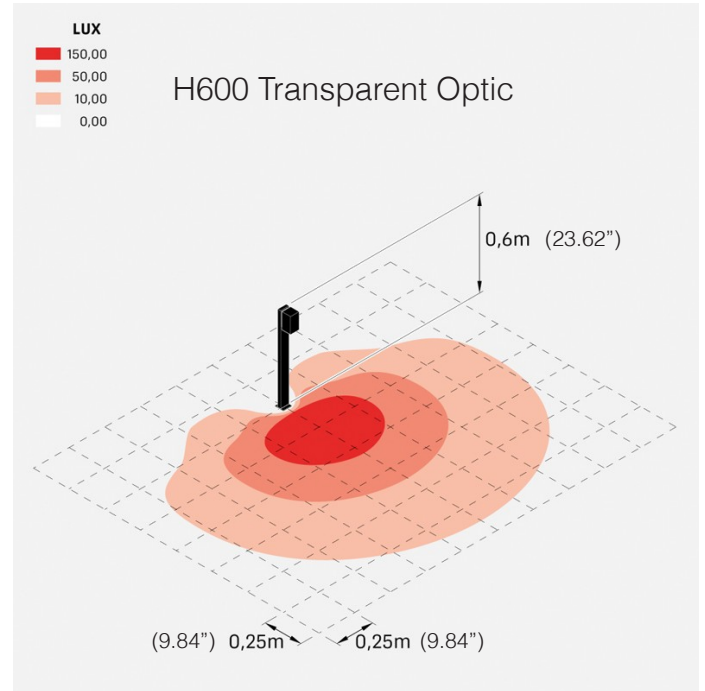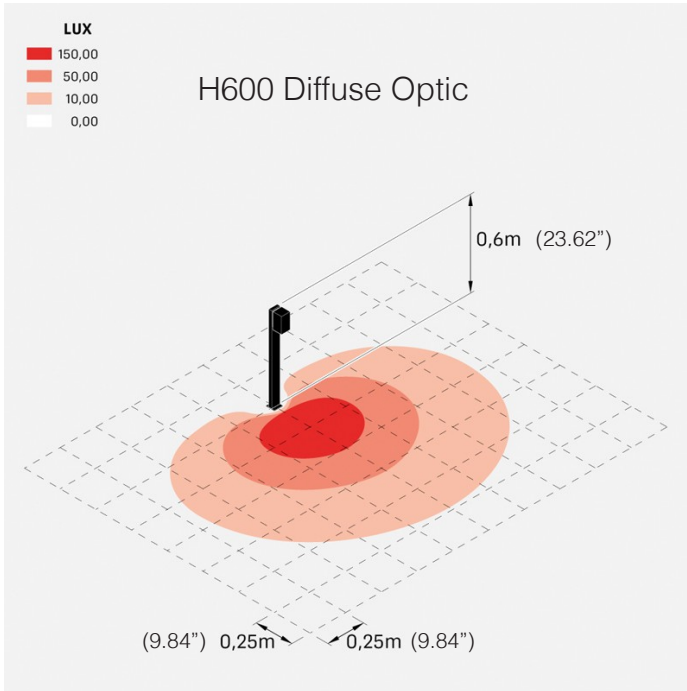

Trend H800 Optic

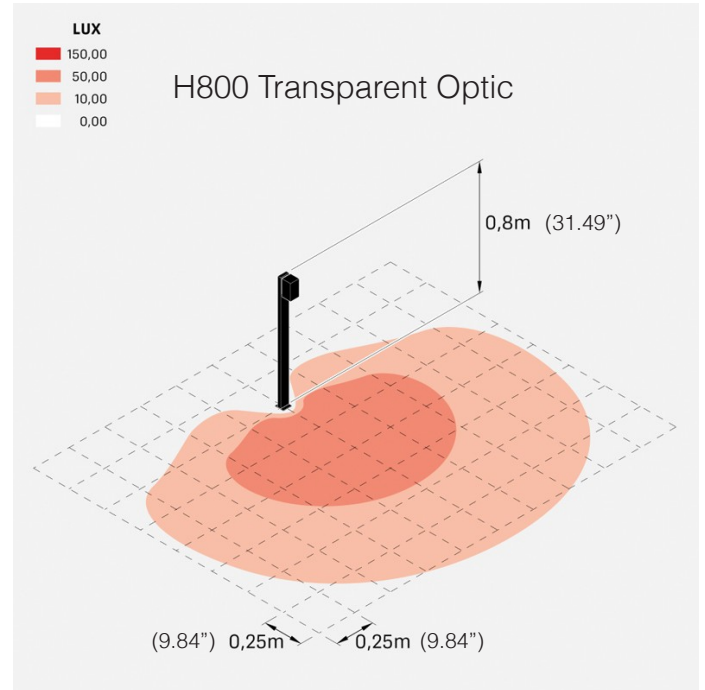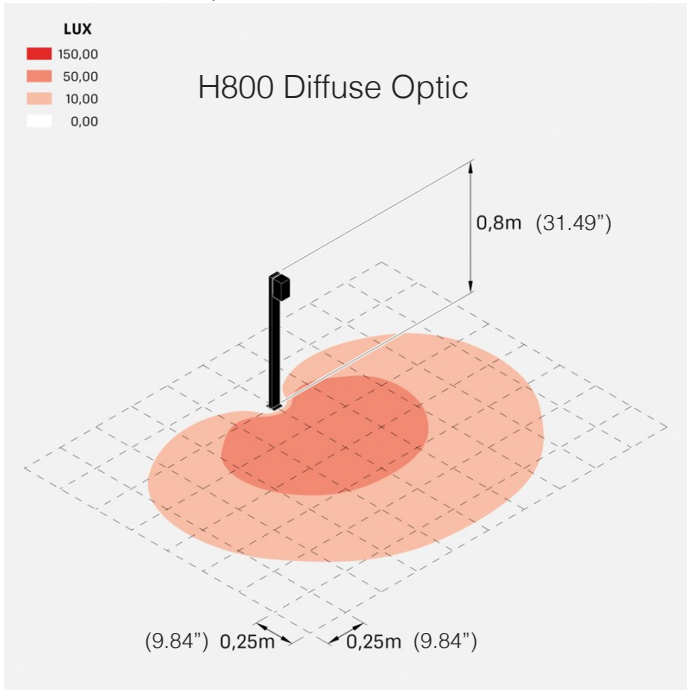

Trend H600 Photometric Curves

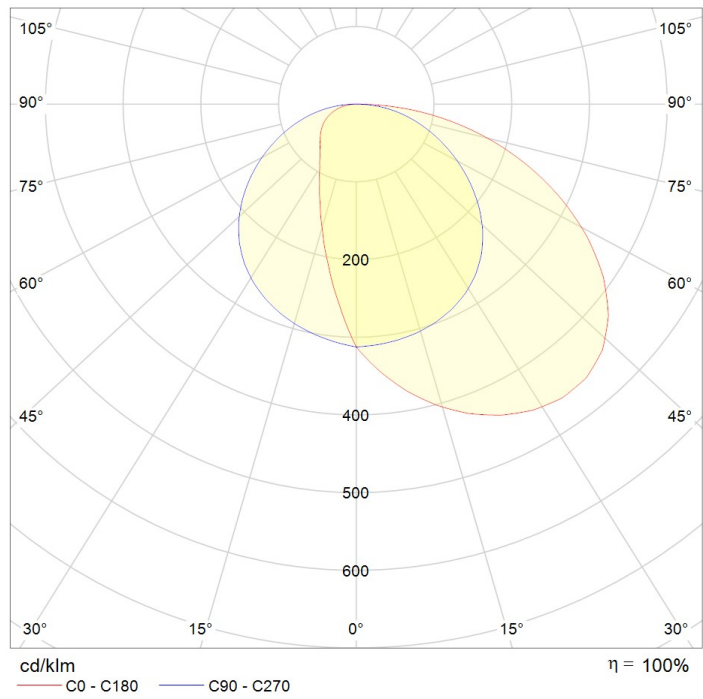

Trend H800 Photometric Curves

