

CLOCK

POLE

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

CLOCK

POLE

TYPE:

PROJECT NAME:




Reduced thickness

Its 36 mm thickness for both diameters allows to fix CLOCK discreetly in outdoor settings.




The aluminum body rotates around the locking pin on the vertical surface to easily adjust its direction. An BMA screw locks it in place. Two eyelets on the base allow for a $\pm 40^\circ$ horizontal adjustment.



Sealed glass

The front tempered ultrawhite clear glass is sealed to the frame for a perfect watertight.



Garden pole

Garden pole in extruded aluminium, suitable for cable entry (max 2) thanks to dedicated slots.



Watertight wiring

CLOCK is hermetically sealed with a two-component resin and provided with a 1.5 m H05RN-F cable. The cable can pass through a special hole in the base of the arm.

- Brass cable gland
- Aquastop Resin Finish
- Anti-tear cable

SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

CLOCK

POLE

TYPE:


PROJECT NAME:

Light Fixtures

Clock Ø80mm

IP67 outdoor spotlight.
CRI>80.
1.5m buriable cable included.
For 7m cable, add MT7 to code.

Finish options: Graphite, Metallic Grey,
White, Corten




Code	Voltage	Wattage	LED Lumens	Real Lumens	Optics
L984661LV	24V	4	460	290	Standard 40° Add 12 to code for 12° Add 90 to code for 90°

Clock Ø120mm

IP67 outdoor spotlight.
CRI>80.
1.5m buriable cable included.
For 7m cable, add MT7 to code.

Finish options: Graphite, Metallic Grey,
White, Corten

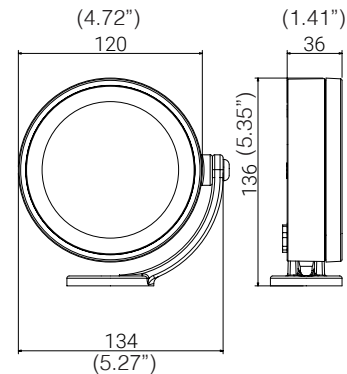

Code	Voltage	Wattage	LED Lumens	Real Lumens	Optics
L984664LV	24V	10	1100	750	Standard 40° Add 12 to code for 12° Add 90 to code for 90° Add HC to code for honeycomb optic
L984665LV	24V	15	1575	1050	Standard 40° Add 12 to code for 12° Add 90 to code for 90° Add HC to code for honeycomb optic

SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

CLOCK

POLE

TYPE:

PROJECT NAME:

Poles


Small pole (max 1 light)

Extruded aluminum

Code: L984693

See next page for accessories

Finish options: Graphite

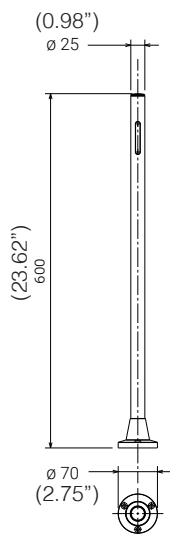


Large pole (max 2 lights)

Extruded aluminum

Code: L984694

See next page for accessories

Finish options: Graphite

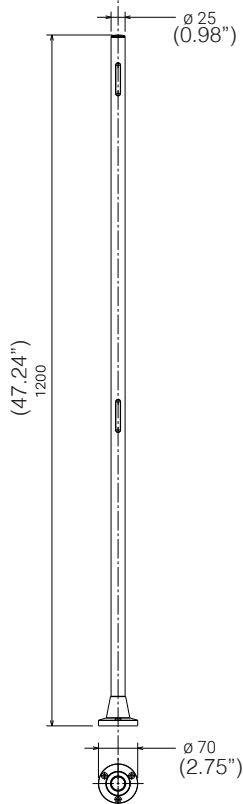


SPECIFICATION SHEET

Pole Accessories


Adjustable joint

For mounting Clock luminaire to poles
Extruded aluminum
Code: L984693




Garden spike

Polycarbonate with stainless steel mounting
plate. Recommended for small pole only.
Code: L984696



Anchor plate

AISI 304 stainless steel anchor with
mounting plate. For large or small pole.
Code: L984697



Example:

The Clock as shown in this picture, with 2 lights
on a 1.2m (47.24") pole, would be ordered with
the following codes:

Lights: L984664LV (x2)

Pole: L984694

Adjustable joint: L984693 (x2)

Anchor plate: L984697



CLOCK


SPOTLIGHT/POLE

TYPE:


PROJECT NAME:

Waterproof connectors


Single connector IP68
Code: L981941



Through wiring connector IP68
Code: L981942

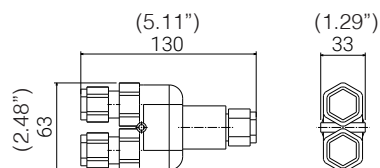

Up to 4 outputs connector IP68, based on
two component silicon gel
Code: L981944

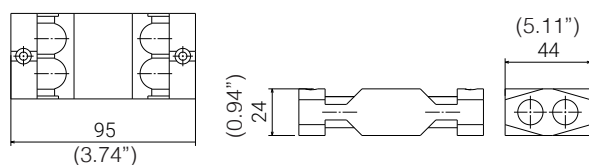

SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

SPOTLIGHT/POLE

PROJECT NAME:

LIGHT FIXTURES:

Order Code	Finish	LED	Remote Driver Options
	<input type="radio"/> Graphite	<input type="radio"/> 27K (2700K)	<input type="radio"/> 120V Phase Dimming
	<input type="radio"/> Metallic Grey	<input type="radio"/> 3K (3000K)	<input type="radio"/> 120V 0-10V Dimming
	<input type="radio"/> White	<input type="radio"/> 4K (4000K)	<input type="radio"/> 277V 0-10V Dimming
	<input type="radio"/> Corten		

ACCESSORIES:

[illegible]

SPECIFICATION SHEET



Luminart®

WWW.LUMINARTLIGHTING.COM