

CLOCK

SPOTLIGHT

TYPE:


PROJECT NAME:



Reduced thickness

Its 36 mm thickness for both diameters allows to fix CLOCK discreetly in outdoor settings.

The aluminum body rotates around the locking pin on the vertical surface to easily adjust its direction. An BMA screw locks it in place. Two eyelets on the base allow for a $\pm 40^\circ$ horizontal adjustment.



Sealed glass

The front tempered ultrawhite clear glass is sealed to the frame for a perfect watertight.



Watertight wiring

CLOCK is hermetically sealed with a two-component resin and provided with a 1.5 m H05RN-F cable. The cable can pass through a special hole in the base of the arm.

- Brass cable gland
- Aquastop Resin Finish
- Anti-tear cable



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

CLOCK

SPOTLIGHT

TYPE:


PROJECT NAME:

Light Fixtures

Clock Ø80mm

IP67 outdoor spotlight.
CRI>80.
1.5m buriable cable included.
For 7m cable, add MT7 to code.

Finish options: Graphite, Metallic Grey,
White, Corten




Code	Voltage	Wattage	LED Lumens	Real Lumens	Optics
L984661LV	24V	4	460	290	Standard 40° Add 12 to code for 12° Add 90 to code for 90°

Clock Ø120mm

IP67 outdoor spotlight.
CRI>80.
1.5m buriable cable included.
For 7m cable, add MT7 to code.

Finish options: Graphite, Metallic Grey,
White, Corten

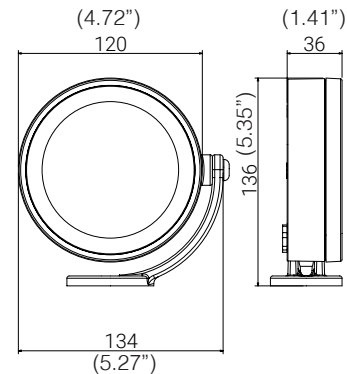

Code	Voltage	Wattage	LED Lumens	Real Lumens	Optics
L984664LV	24V	10	1100	750	Standard 40° Add 12 to code for 12° Add 90 to code for 90° Add HC to code for honeycomb optic
L984665LV	24V	15	1575	1050	Standard 40° Add 12 to code for 12° Add 90 to code for 90° Add HC to code for honeycomb optic

SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

CLOCK

SPOTLIGHT

TYPE:

PROJECT NAME:


Accessories

Visor for Clock Ø120

Painted aluminum

Code: L984669

Finish options: Graphite, Metallic Grey




Garden spike

Polycarbonate. For mounting individual lights as spotlight.

Code: L984691

Finish options: Graphite, Metallic Grey



CLOCK


SPOTLIGHT

TYPE:


PROJECT NAME:

Waterproof connectors


Single connector IP68
Code: L981941



Through wiring connector IP68
Code: L981942

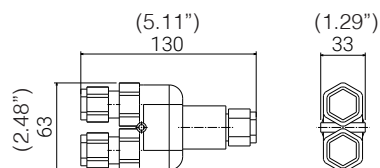

Up to 4 outputs connector IP68, based on
two component silicon gel
Code: L981944

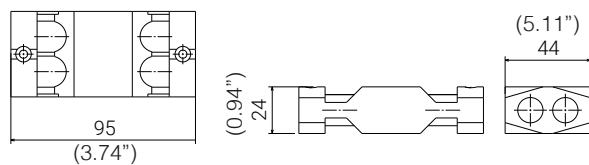

SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

CLOCK
SPOTLIGHT

TYPE:

PROJECT NAME:

ORDERING INFO

LIGHT FIXTURES:

Order Code	Finish	LED	Remote Driver Options
	☐ Anthracite	☐ 27K (2700K)	☐ 120V Phase Dimming
	☐ Aluminum Grey	☐ 3K (3000K)	☐ 120V 0-10V Dimming
	☐ White	☐ 4K (4000K)	☐ 277V 0-10V Dimming
	☐ Corten		

ACCESSORIES:

Order Code	Finish (if applicable)

SPECIFICATION SHEET

