

CUT™
RECESSED

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM
Last updated: 07/08/24

CUT™ 45

RECESSED

TYPE:

PROJECT NAME:

Fixture Specifications

1 Window



2 Windows



4 Windows



Protection . IP 67 - IK 08

Body . Anticorodal turning aluminum 6000 Serie,
for greater corrosion resistance

Box . Polypropylene

Screen . Transparent Polycarbonate

Seals . EPDM rubber

Paint / Finishing . Anti-corrosive UV stabilised
polyester powder

Finishes

NEW COLOR



GREEN COOL MINT
RAL 6019



PURE WHITE
RAL 9016



BLACK
RAL 9005



WHITE
RAL 9010



BRONZE



RUST



ANTHRACITE




SLATE GREY




GREY
RAL 9006

1 Window



Ø45
(1.77")




Ø35
(1.37")

2 Windows



Ø45
(1.77")




Ø35
(1.37")

4 Windows




Ø45
(1.77")



Ø35
(1.37")

Underground CASING



CUT™ 45
RECESSED

TYPE:

PROJECT NAME:

1L

1 WINDOW PRODUCT

2L

2 WINDOWS PRODUCT




4L

4 WINDOWS PRODUCT

SPECIFICATION SHEET

CUT™ 45
RECESSED

TYPE:
PROJECT NAME:

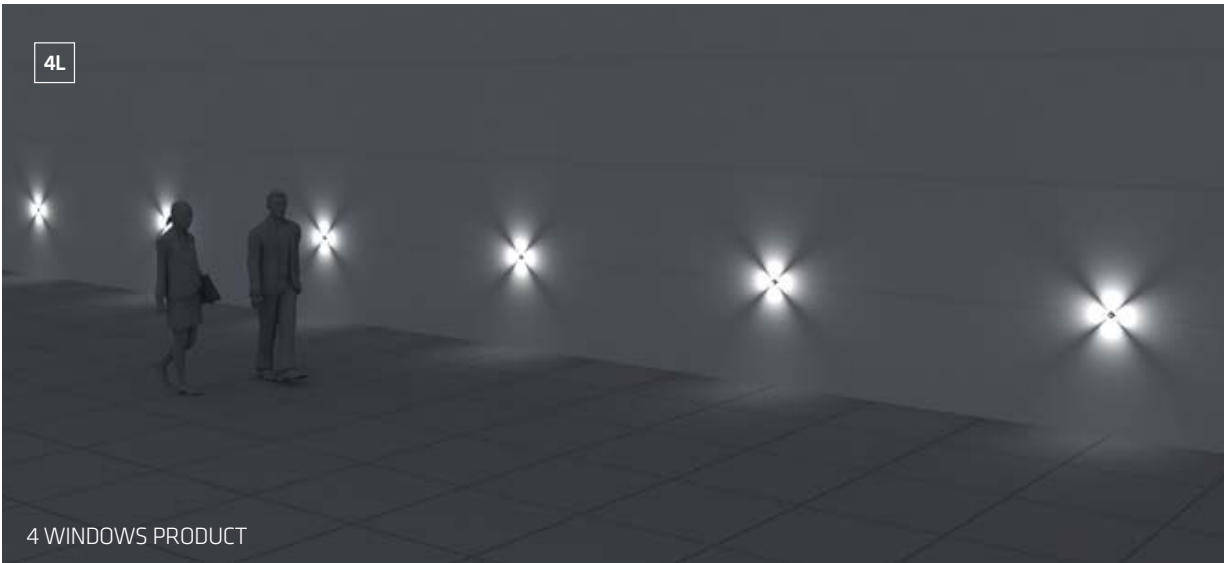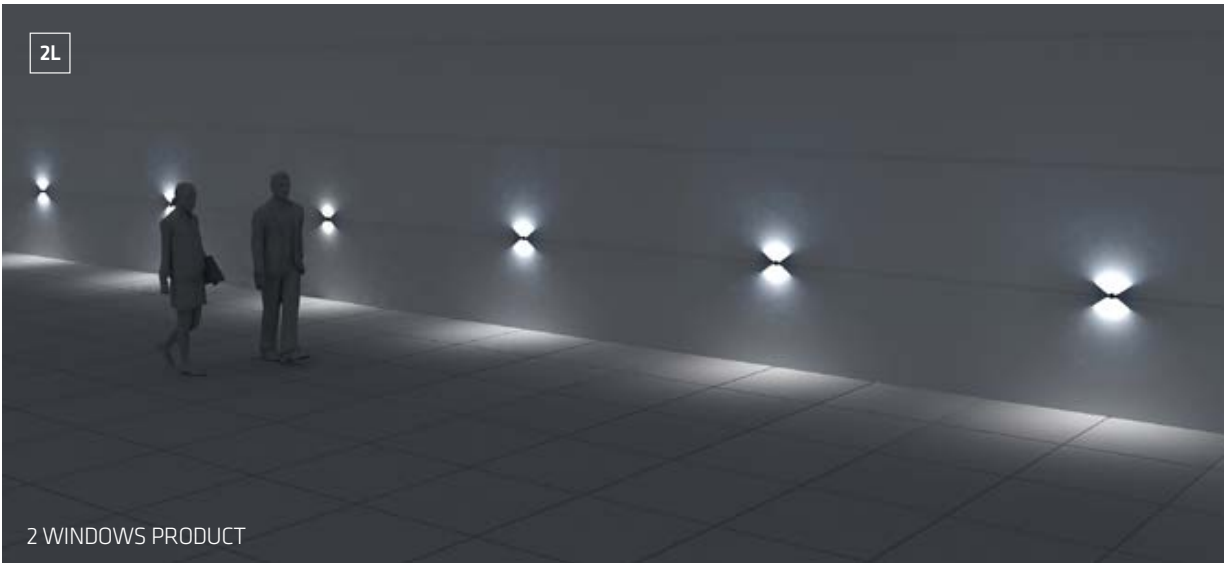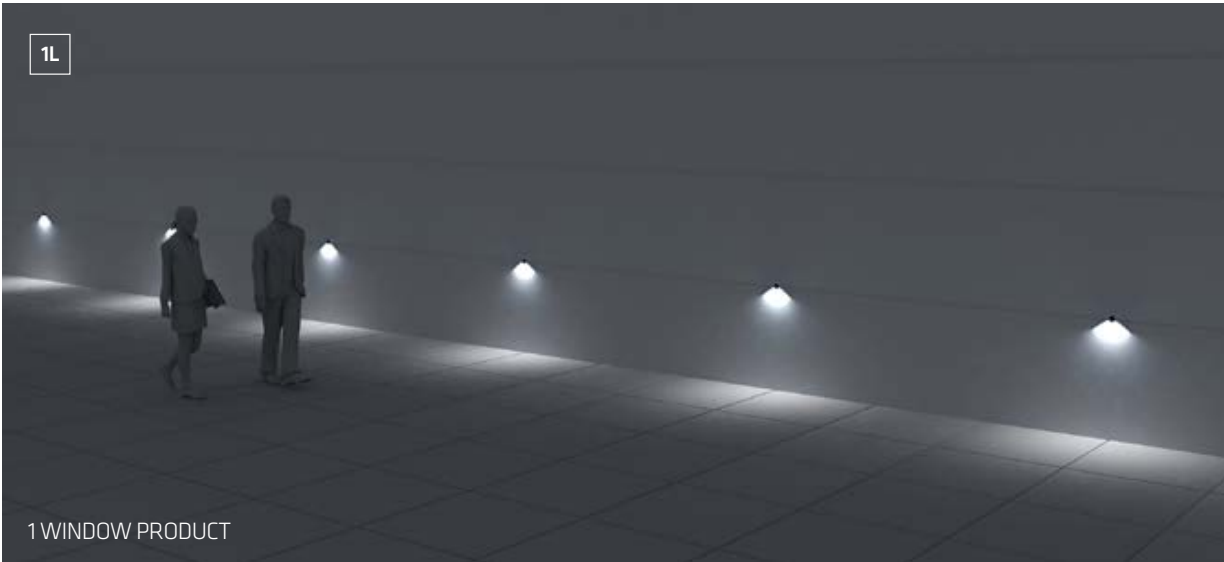

SPECIFICATION SHEET

CUT™ 45

RECESSED

TYPE:

PROJECT NAME:

1 Window

2 Windows

4 Windows



<i>beam</i>	<i>class</i>	<i>power</i>	<i>W</i>	<i>source</i>	<i>fixture</i>	<i>CCT LED</i>	<i>CRI</i>
 1L 1 Window	III	24Vdc	2W	170 lm	16 lm	3000K	80
 1L 1 Window	III	24Vdc	2W	190 lm	20 lm	4000K	80
 2L 2 Windows	III	24Vdc	2W	170 lm	27 lm	3000K	80
 2L 2 Windows	III	24Vdc	2W	190 lm	31 lm	4000K	80
 4L 4 Windows	III	24Vdc	2W	170 lm	41 lm	3000K	80
 4L 4 Windows	III	24Vdc	2W	190 lm	45 lm	4000K	80

ORDERING INFO

Model (Order Code)	Optic Options	Finish Options	01 LED	LED	Remote Driver Options
☐ L904045R	☐ 1L: 1 Window ☐ 2L: 2 Windows ☐ 4L: 4 Windows	☐ 00: Pure White ☐ 10: White ☐ 24: Bronze ☐ 25: Rust ☐ 01: Black ☐ 30: Anthracite ☐ 35: Slate Grey ☐ 40: Grey ☐ 55: Green Cool Mint	☐ 01: Underground Casing	☐ 30: 3000K ☐ 40: 4000K	☐ 120V LTE ☐ 120V-277V 0-10V (Universal Voltage)



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM
Last updated: 07/08/24

CUT™ 70

RECESSED

TYPE:

PROJECT NAME:

Fixture Specifications



1 Window

2 Windows

4 Windows

Protection . IP 67 - IK 08

Body . Anticorodal turning aluminum 6000 Serie,
for greater corrosion resistance

Box . Polypropylene

Screen . Transparent Polycarbonate

Seals . EPDM rubber

Paint / Finishing . Anti-corrosive UV stabilised
polyester powder

Finishes

NEW COLOR



55
GREEN COOL MINT
RAL 6019




00
PURE WHITE
RAL 9016



01
BLACK
RAL 9005



10
WHITE
RAL 9010



24
BRONZE



25
RUST



30
ANTHRACITE




35
SLATE GREY




40
GREY
RAL 9006

1 Window




Ø70
(2.75")

(3.34")
85




Ø55
(2.16")

2 Windows




Ø70
(2.75")

(3.34")
85




Ø55
(2.16")

4 Windows




Ø70
(2.75")

(3.34")
85



Ø55
(2.16")

Underground CASING



CUT™ 70
RECESSED

TYPE:

PROJECT NAME:

1L

1 WINDOW PRODUCT

2L

2 WINDOWS PRODUCT




4L

4 WINDOWS PRODUCT

SPECIFICATION SHEET

CUT™ 70
RECESSED

TYPE:
PROJECT NAME:

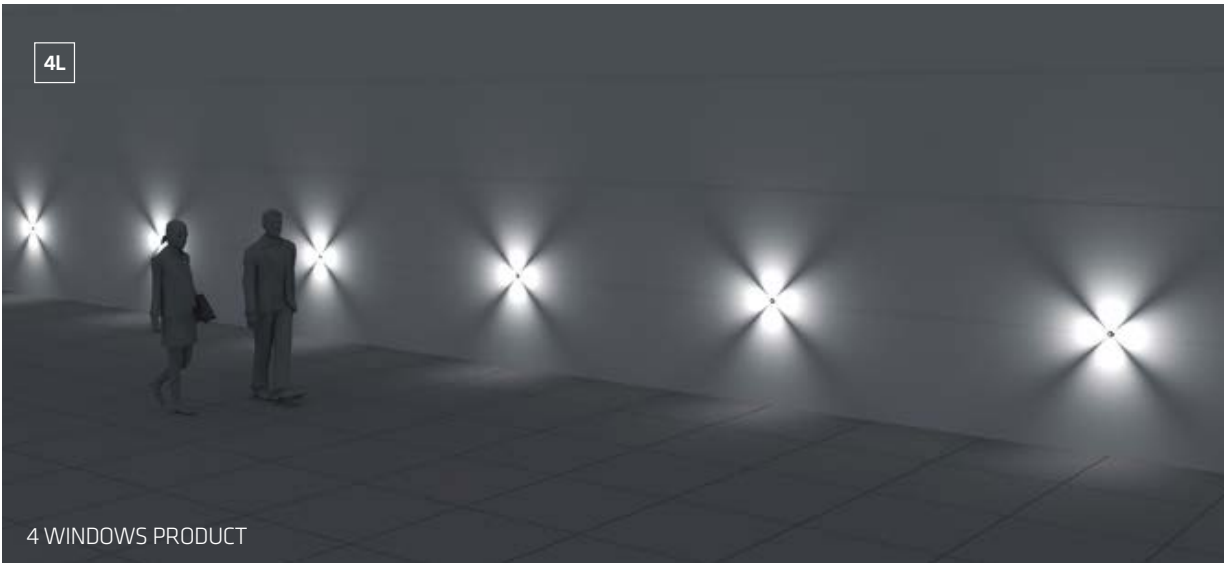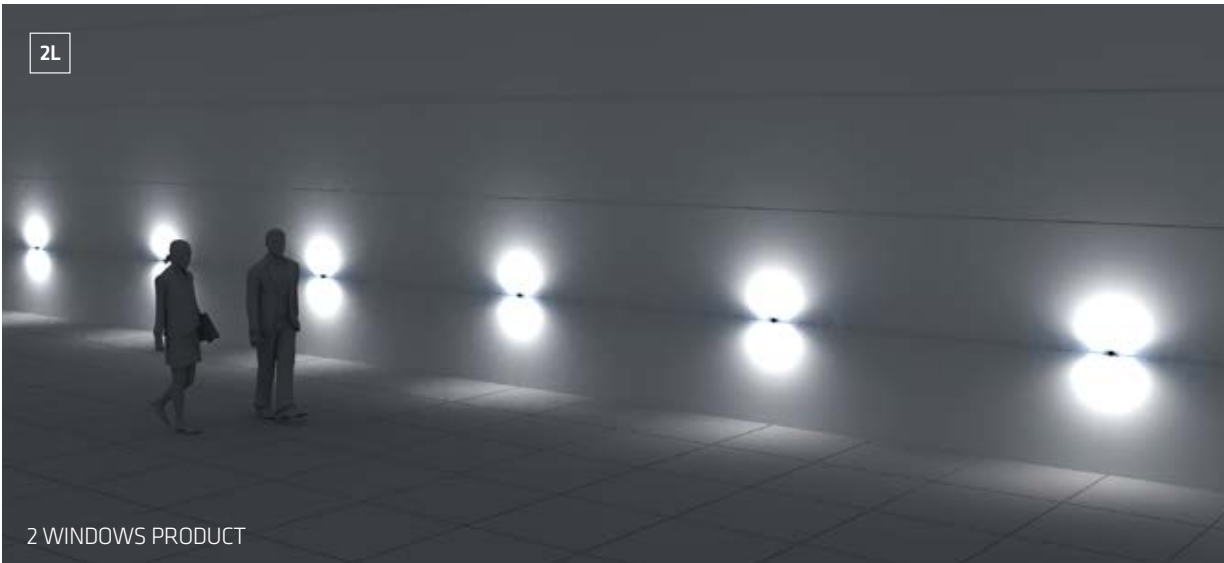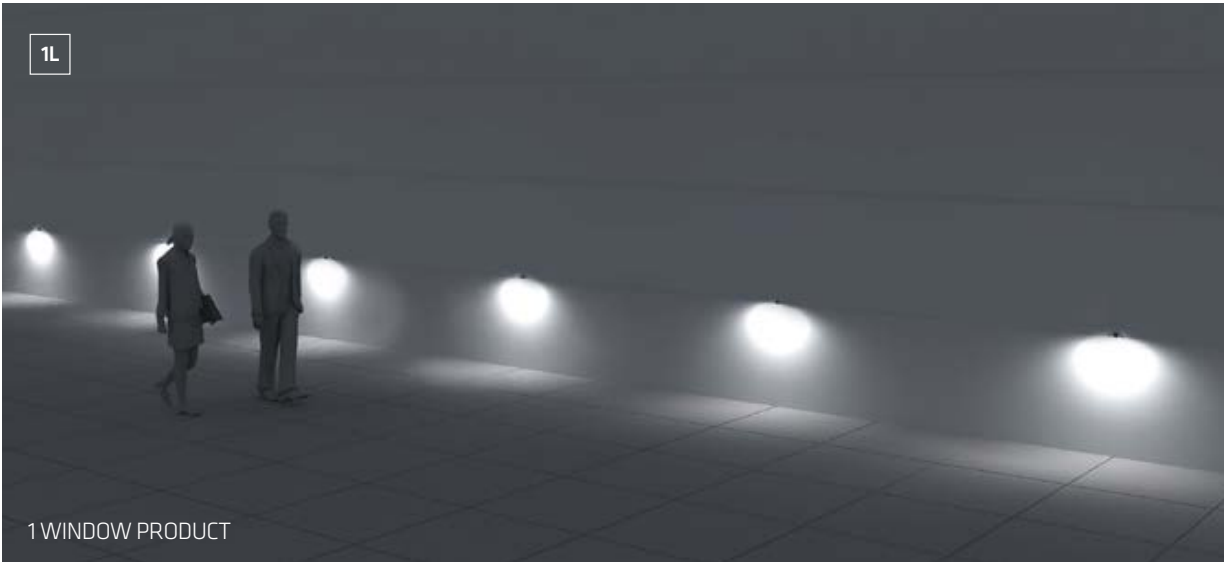

SPECIFICATION SHEET

CUT™ 70

RECESSED

TYPE:

PROJECT NAME:

1 Window

2 Windows

4 Windows



beam	class	power	W	source	fixture	CCT LED	CRI
 1L 1 Window	III	24Vdc	6W	690 lm	41 lm	3000K	80
 1L 1 Window	III	24Vdc	6W	750 lm	45 lm	4000K	80
 2L 2 Windows	III	24Vdc	6W	690 lm	77 lm	3000K	80
 2L 2 Windows	III	24Vdc	6W	750 lm	79 lm	4000K	80
 4L 4 Windows	III	24Vdc	6W	690 lm	81 lm	3000K	80
 4L 4 Windows	III	24Vdc	6W	750 lm	85 lm	4000K	80

ORDERING INFO

Model (Order Code)	Optic Options	Finish Options	01 LED	LED	Remote Driver Options
☐ L904070R	☐ 1L: 1 Window ☐ 2L: 2 Windows ☐ 4L: 4 Windows	☐ 00: Pure White ☐ 10: White ☐ 24: Bronze ☐ 25: Rust ☐ 01: Black ☐ 30: Anthracite ☐ 35: Slate Grey ☐ 40: Grey ☐ 55: Green Cool Mint	☐ 01: Underground Casing	☐ 30: 3000K ☐ 40: 4000K	☐ 120V LTE ☐ 120V-277V 0-10V (Universal Voltage)



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM
Last updated: 07/08/24