

DOMINO™

LINEAR FACADE LIGHTING

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

Luminart®


WWW.LUMINARTLIGHTING.COM
Last updated: 05/14/24

DOMINO™ 600

LINEAR FACADE LIGHTING

TYPE:

PROJECT NAME:

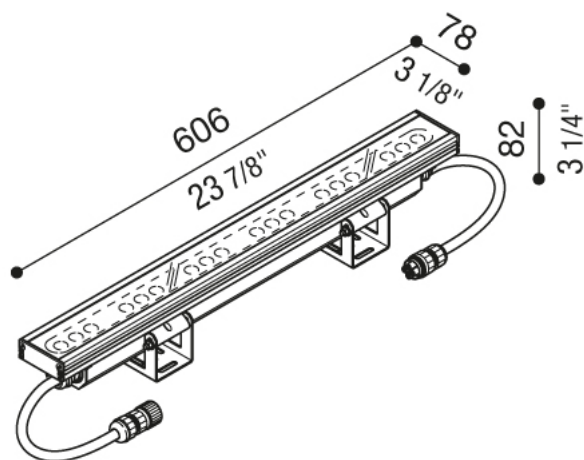

Technical information:

Installation:	Ground
Material:	Aluminum
Treatment:	Anodization
Diffuser type:	Transparent glass
CRI:	>80
LB Factor:	L80B10 - 50.000h
Power consumption [Watt]	34
Source Lumen:	4125 lm
Delivered Lumen:	3130 lm
Type of protection:	IP66

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Structure Finish	Optic Options	LED	Dimming Options
☐ L53LX156060	☐ ☒ BL: Black	☐ 30: 30° ☐ 50: 50° ☐ 35: 12 x 35° ☐ W: Wall Washer	☐ 2700K ☐ 3000K ☐ 4000K	☐ 120V LTE ☐ 120V 0-10V ☐ 277V 0-10V



Luminart®





WWW.LUMINARTLIGHTING.COM

DOMINO™ 600

LINEAR FACADE LIGHTING

TYPE:

PROJECT NAME:

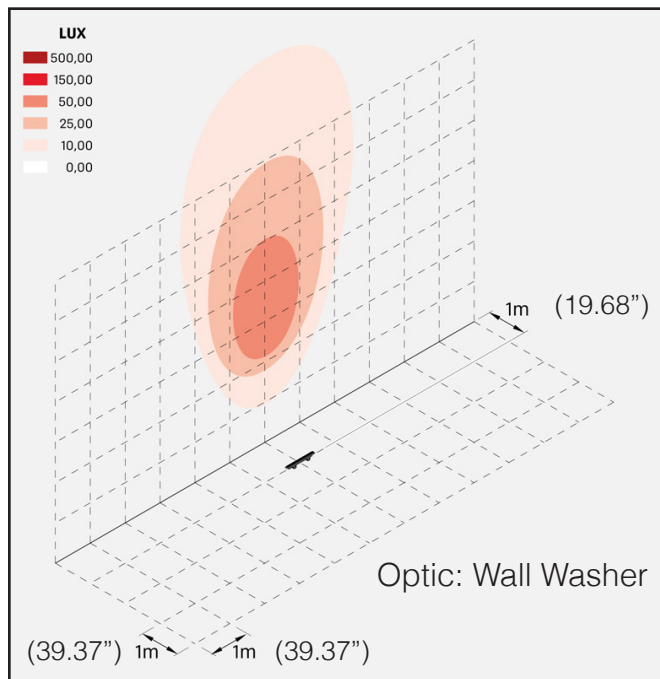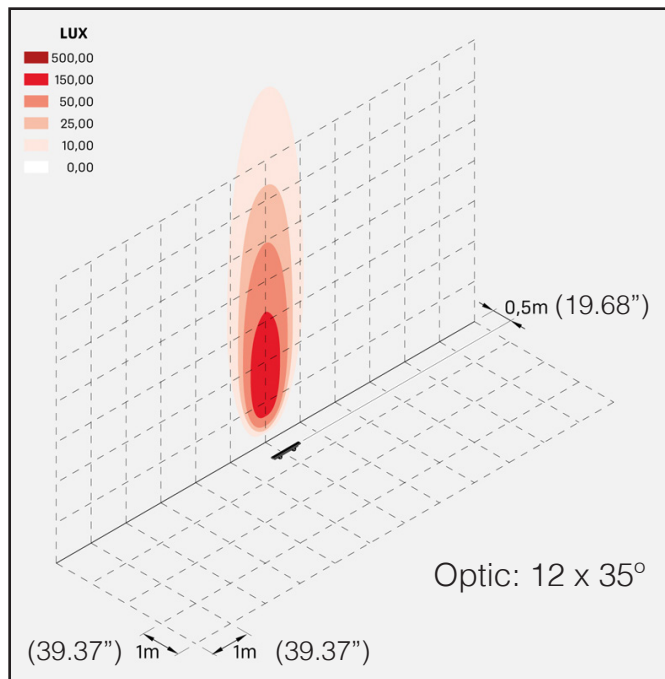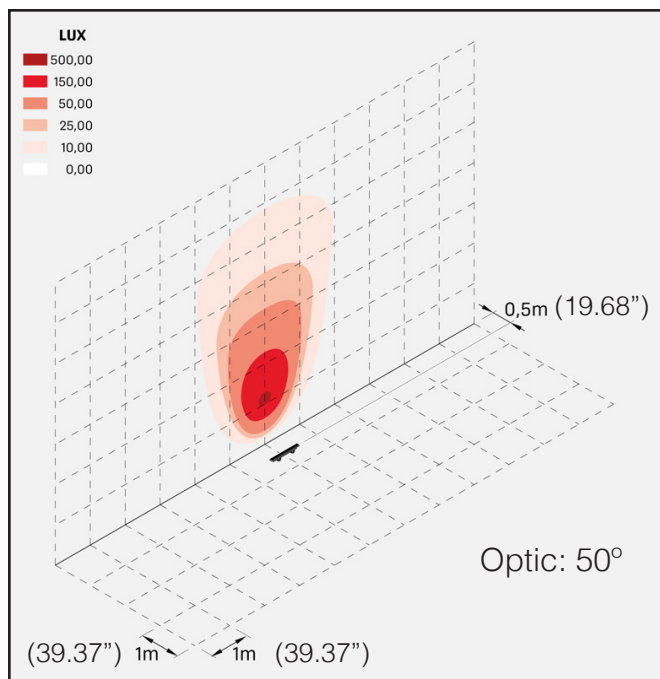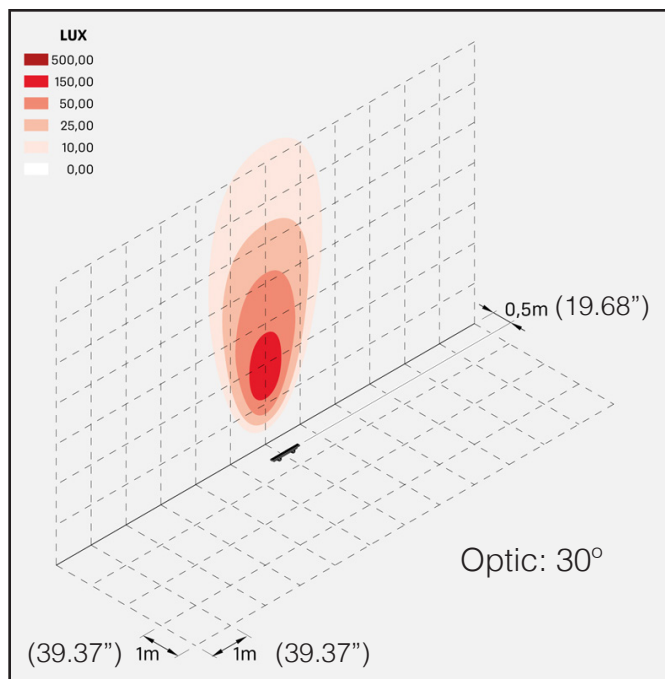

SPECIFICATION SHEET

Luminart®


WWW.LUMINARTLIGHTING.COM

DOMINO™ 900

LINEAR FACADE LIGHTING

TYPE:

PROJECT NAME:

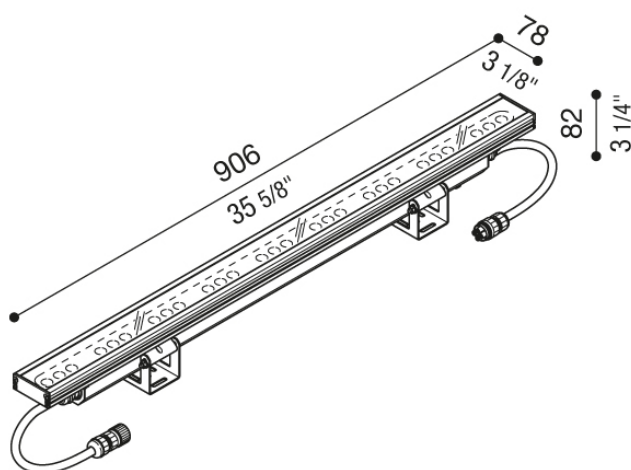

Technical information:

Installation:	Ground
Material:	Aluminum
Treatment:	Anodization
Diffuser type:	Transparent glass
CRI:	>80
LB Factor:	L80B10 - 50.000h
Power consumption [Watt]	50
Source Lumen:	6090 lm
Delivered Lumen:	4620 lm
Type of protection:	IP66

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Structure Finish	Optic Options	LED	Dimming Options
☐ L53LL156090	☐ ☒ BL: Black	☐ 30: 30° ☐ 50: 50° ☐ 35: 12 x 35° ☐ W: Wall Washer	☐ 2700K ☐ 3000K ☐ 4000K	☐ 120V LTE ☐ 120V 0-10V ☐ 277V 0-10V



Luminart®





WWW.LUMINARTLIGHTING.COM

DOMINO™ 900

LINEAR FACADE LIGHTING

TYPE:

PROJECT NAME:

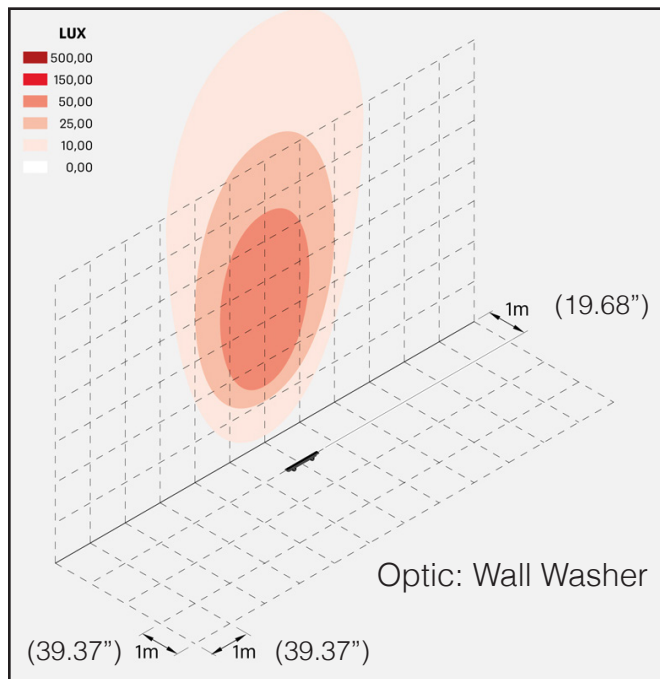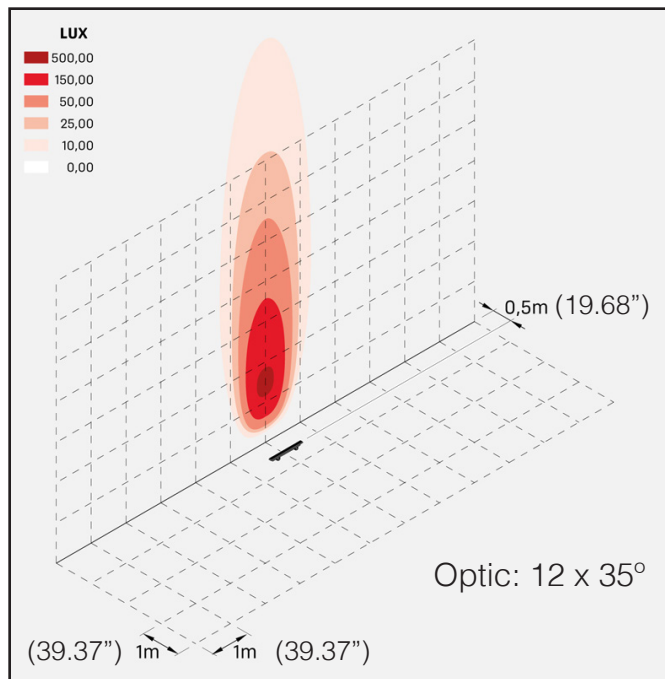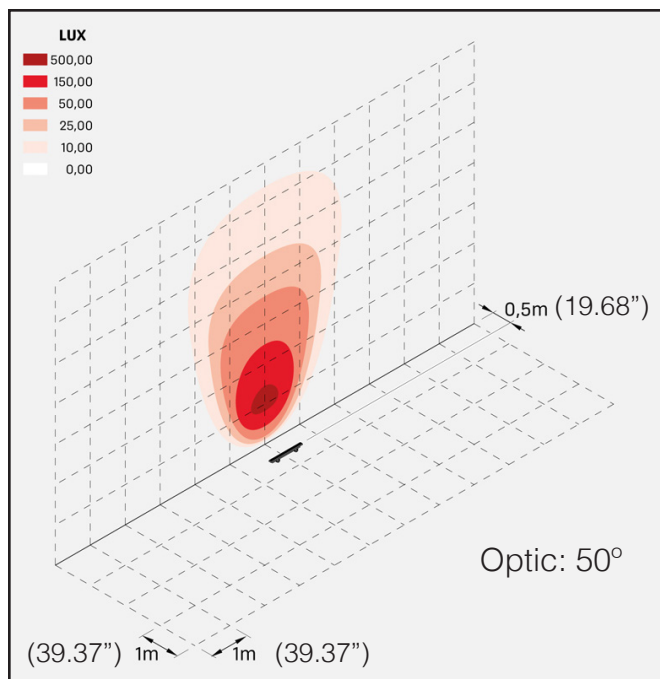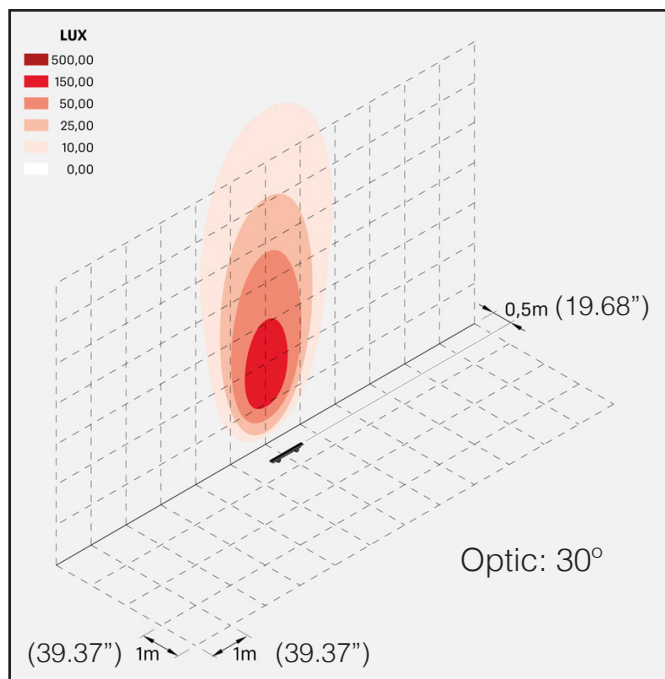

SPECIFICATION SHEET

Luminart®


WWW.LUMINARTLIGHTING.COM

DOMINO™ 1200

LINEAR FACADE LIGHTING

TYPE:

PROJECT NAME:

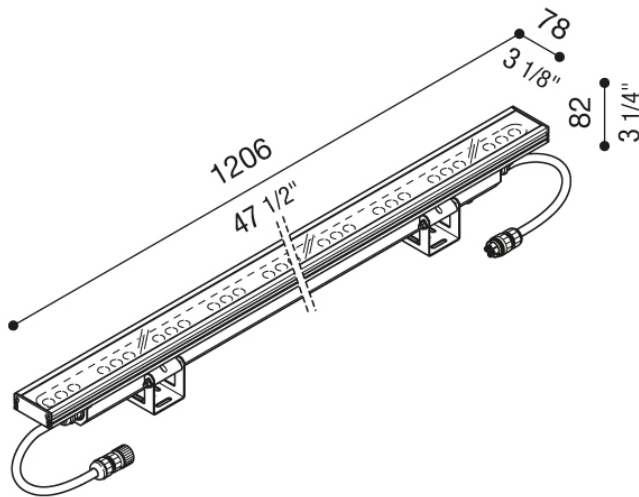

Technical information:

Installation:	Ground
Material:	Aluminum
Treatment:	Anodization
Diffuser type:	Transparent glass
CRI:	>80
LB Factor:	L80B10 - 50.000h
Power consumption [Watt]	66
Source Lumen:	8120 lm
Delivered Lumen:	6160 lm
Type of protection:	IP66

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	Structure Finish	Optic Options	LED	Dimming Options
☐ L53LX156012	☐ BL: Black	☐ 30: 30° ☐ 50: 50° ☐ 35: 12 x 35° ☐ W: Wall Washer	☐ 2700K ☐ 3000K ☐ 4000K	☐ 120V LTE ☐ 120V 0-10V ☐ 277V 0-10V



Luminart®





WWW.LUMINARTLIGHTING.COM

DOMINO™ 1200

LINEAR FACADE LIGHTING

TYPE:

PROJECT NAME:

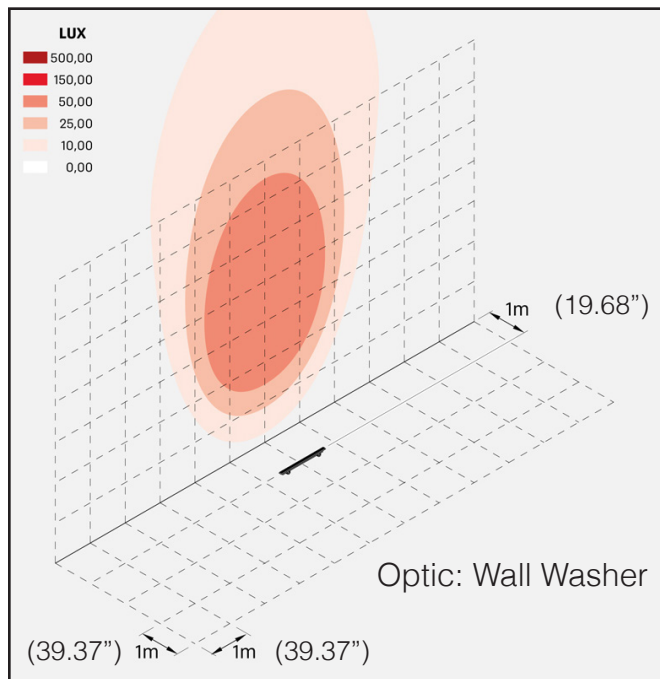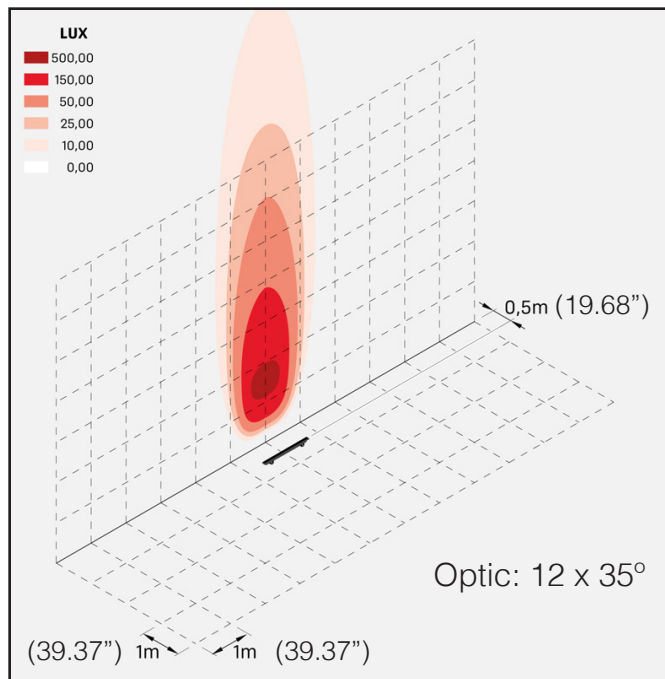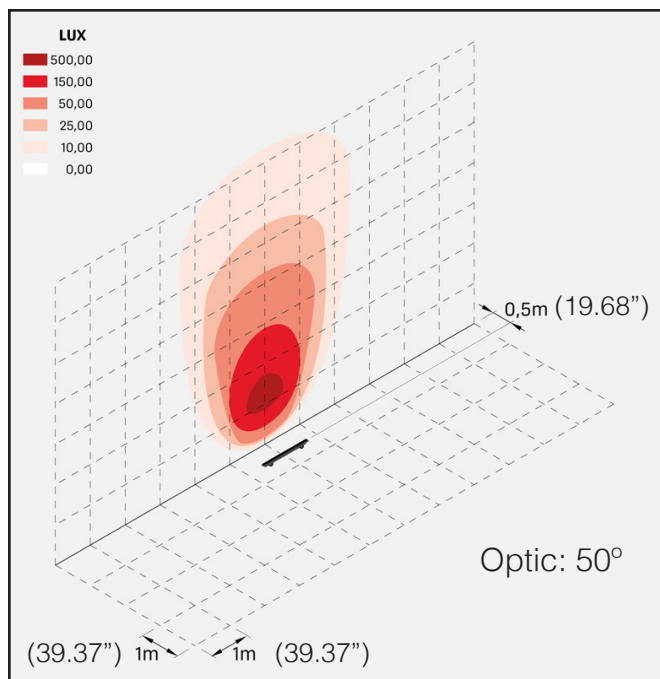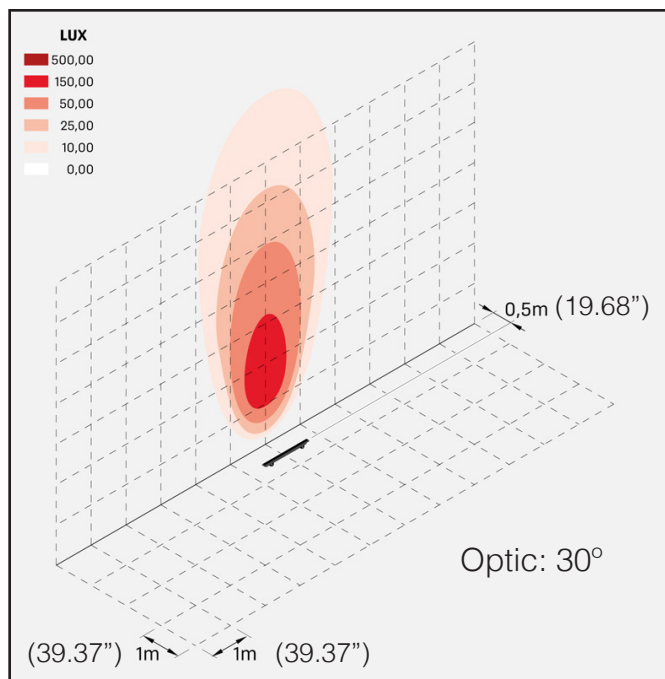

SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM