

FREEDOM LINE LINEAR RD™ TYPE:

SUSPENSION - STANDARD STRAIGHT CONFIGURATION PROJECT NAME:



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

FREEDOM LINE LINEAR RD™

TYPE:

SUSPENSION - STANDARD STRAIGHT CONFIGURATION

PROJECT NAME:



The Freedom Line Linear RD is a linear pendant LED luminaire. The different length is well-suited to provide lighting for both residential and hospitality settings.

Light Source: 14.4W/m LED 24V

Lum. flux of light source: 1800 lm/m



IP: 20

Material: Double-layered plastic profile with the outside layer from a material resistant to UV radiation


Mounting:

Supplied with 80" (2000mm) long suspension aircraft cable (standard) and canopy. To be installed on a standard 4" octagonal junction box.

Custom cable length on request (Please specify).

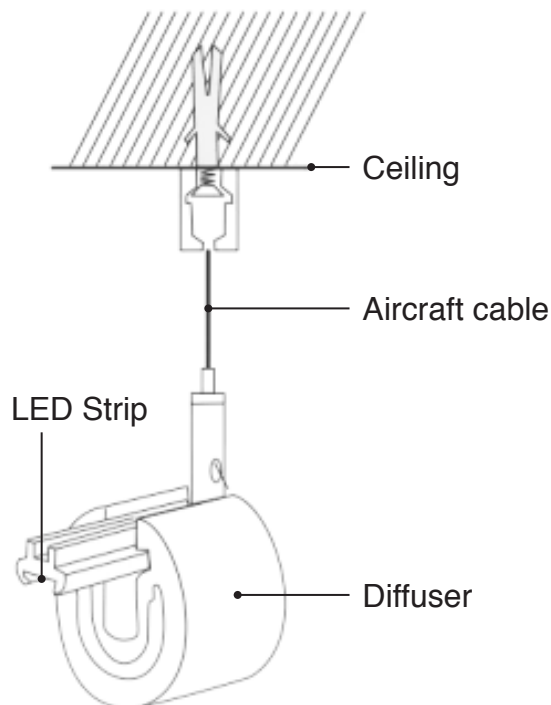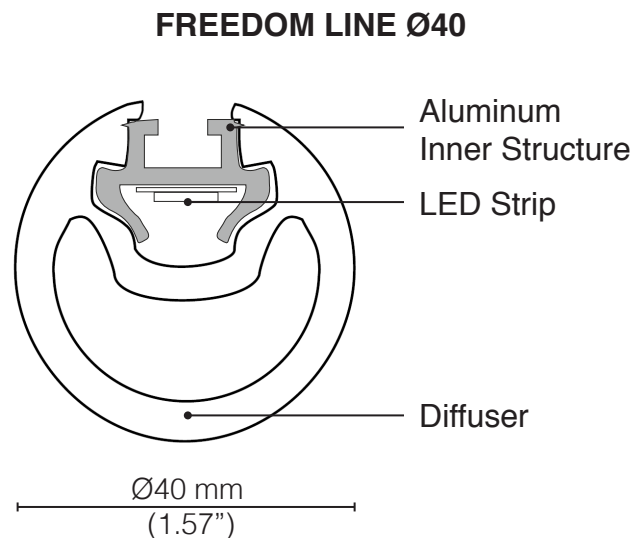

INSTALLATION OPTIONS

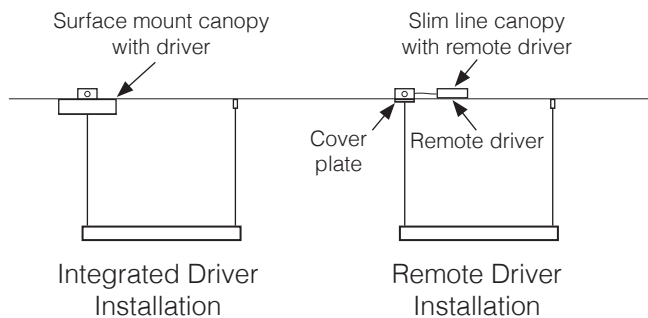


FREEDOM LINE LINEAR RD™ TYPE:

SUSPENSION - STANDARD STRAIGHT CONFIGURATION PROJECT NAME:


FREEDOM LINE RD 60

L56SUSLINE60

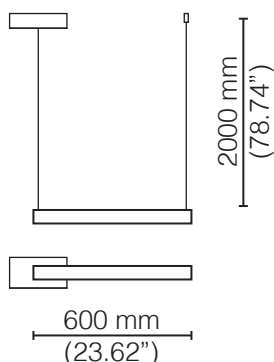


FREEDOM LINE RD 240

L56SUSLINE240

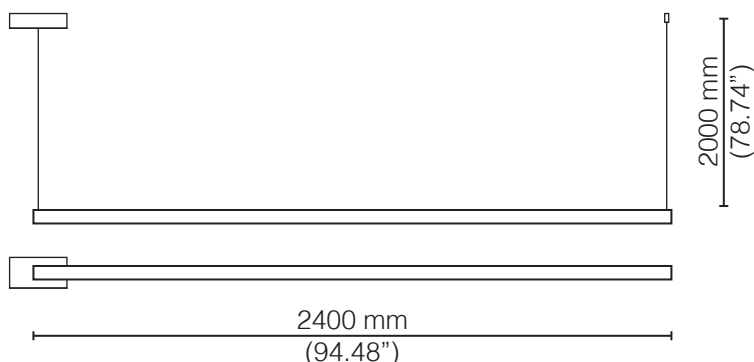


FREEDOM LINE RD 120

L56SUSLINE120

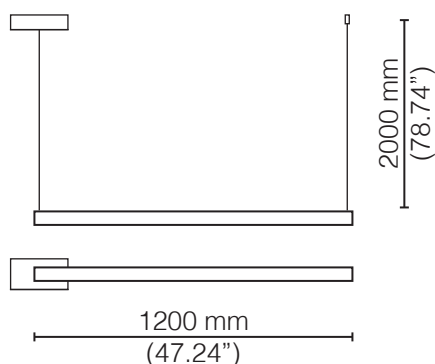

FREEDOM LINE RD 300

L56SUSLINE300

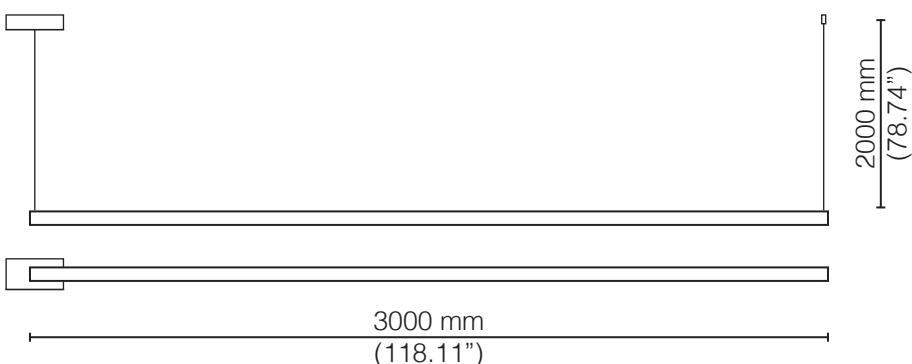

	Light Source [W]	Lum. flux of light source [lm] (3000K)	Code
Freedom Line Linear RD 60	9W	1080 lm	L56SUSLINE60
Freedom Line Linear RD 120	18W	2160 lm	L56SUSLINE120
Freedom Line Linear RD 240	35W	4320 lm	L56SUSLINE240
Freedom Line Linear RD 300	43W	5400 lm	L56SUSLINE300

ORDERING INFO

Model (Order Code)	LED	Installation Options	Driver Options
<input type="radio"/> L56SUSLINE60	<input type="radio"/> 27: 2700K	<input type="radio"/> RM: Slim line canopy with remote driver	<input type="radio"/> 120V LTE
<input type="radio"/> L56SUSLINE120	<input type="radio"/> 30: 3000K	<input type="radio"/> IT: Surface mount canopy with integrated driver	<input type="radio"/> 120V-277V 0-10V
<input type="radio"/> L56SUSLINE240	<input type="radio"/> 35: 3500K		
<input type="radio"/> L56SUSLINE300	<input type="radio"/> 40: 4000K		

