

# FREEDOM LINE SYSTEM™

CEILING

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

**Luminart®**

[WWW.LUMINARTLIGHTING.COM](http://WWW.LUMINARTLIGHTING.COM)



# FREEDOM LINE SYSTEM™

CEILING

TYPE:

PROJECT NAME:





The Freedom Line System is a modular ceiling LED luminaire system. This customizable system allows the light to form unique shapes that are well-suited to provide lighting for both residential and hospitality settings.

**Light Source:** 14.4W/m LED 24V

**Lum. flux of light source:** 1800 lm/m

**IP:** 20

**Material:** Double-layered plastic profile with the outside layer from a material resistant to UV radiation

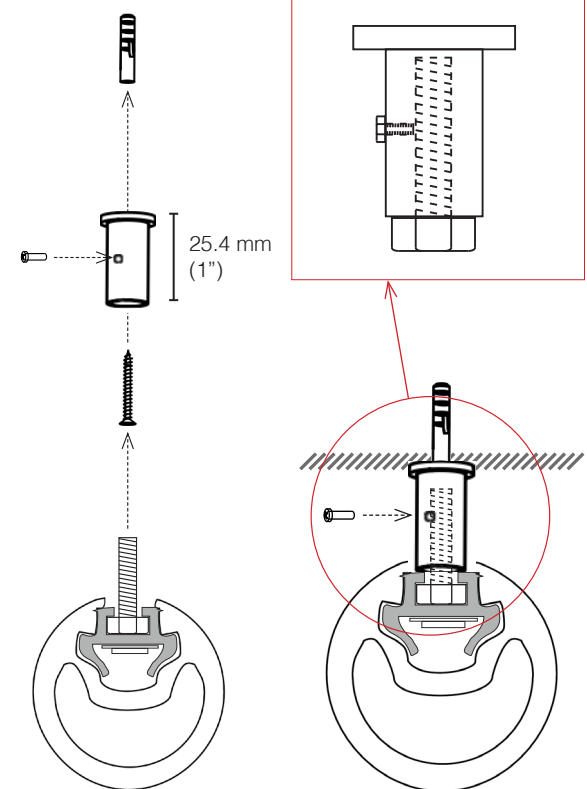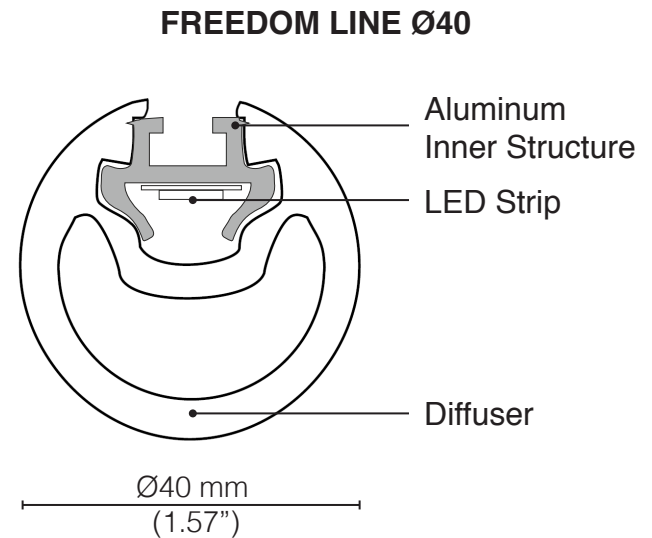

## INSTALLATION

Cover plate

Slim line canopy with remote driver

Remote Driver Installation

SPECIFICATION SHEET

**Luminart®**

WWW.LUMINARTLIGHTING.COM


# FREEDOM LINE SYSTEM™

CEILING


TYPE:

PROJECT NAME:

## INSTALLATION


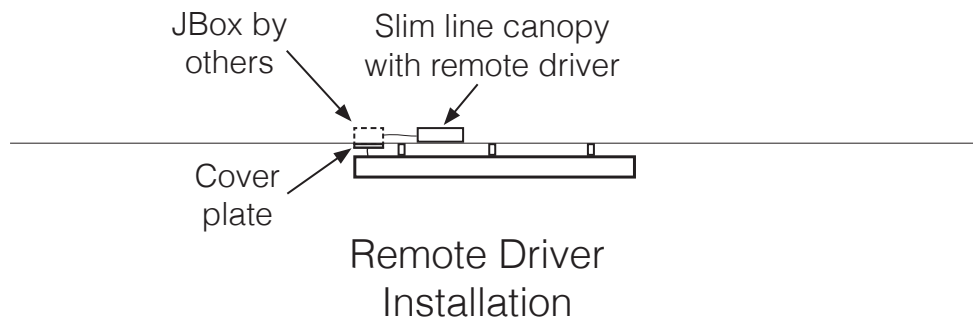


### SLIM LINE CANOPY WITH REMOTE DRIVER L56LINED2



### D2 REMOTE DRIVER CANOPY

Ø120mm  
(4.72")



# FREEDOM LINE SYSTEM™


CEILING

TYPE:

PROJECT NAME:


## FREEDOM LINE L60

L56LINEL60




## FREEDOM LINE L240

L56LINEL240




## FREEDOM LINE L120

L56LINEL120



## FREEDOM LINE L300

L56LINEL300



SPECIFICATION SHEET

	Light Source [W]	Lum. flux of light source [lm] (3000K)	Code
Freedom Line L60	9W	1080 lm	L56LINEL60
Freedom Line L120	18W	2160 lm	L56LINEL120
Freedom Line L240	35W	4320 lm	L56LINEL240
Freedom Line L300	45W	5400 lm	L56LINEL300

**Luminart®**

WWW.LUMINARTLIGHTING.COM


# FREEDOM LINE SYSTEM™

TYPE:


CEILING

PROJECT NAME:

**FREEDOM LINE R100-90°**  
L56LINER10090D




**FREEDOM LINE R75-90°**  
L56LINER7590D




**FREEDOM LINE R40-90°**  
L56LINER4090D



**FREEDOM LINE R150-22.5°**  
L56LINER15022D

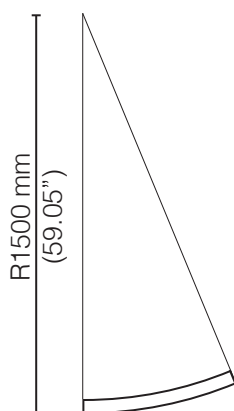


**FREEDOM LINE R75-45°**  
L56LINER7545D



**FREEDOM LINE R40-60°**  
L56LINER4060D



**FREEDOM LINE 90°**  
L56LINE6090D



SPECIFICATION SHEET

	Light Source [W]	Lum. flux of light source [lm] (3000K)	Code
Freedom Line R100-90°	23W	2827 lm	L56LINER10090D
Freedom Line R75-90°	17W	2120 lm	L56LINER7590D
Freedom Line R40-90°	9W	1130 lm	L56LINER4090D
Freedom Line R150-22.5°	8.5W	1060 lm	L56LINER15022D
Freedom Line R75-45°	8.5W	1060 lm	L56LINER7545D
Freedom Line R40-60°	4.5W	753 lm	L56LINER4060D
Freedom Line 60-90°	18W	2160 lm	L56LINE6090D

**Luminart®**

WWW.LUMINARTLIGHTING.COM

# FREEDOM LINE SYSTEM™

CEILING


TYPE:

PROJECT NAME:


## CONFIGURATION SHEET

The FREEDOM LINE system can be designed in multiple configurations by using the different modules below.  
Please use the modules to create your own unique preliminary design, and submit to Luminart for engineering and quotation.


### L60 (9W)




### L120 (18W)



### L240 (35W)



### L300 (45W)




**D1 INTEGRATED DRIVER CANOPY**




**D2 REMOTE DRIVER CANOPY**

A new feed-drop is necessary every time power consumption exceeds the maximum power capacity (90W) of the driver.


### R150-22.5° (8.5W)

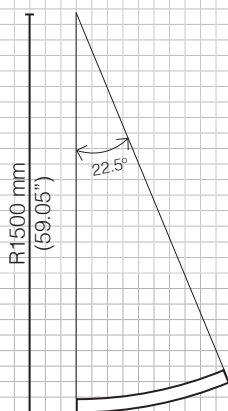


### R75-45° (8.5W)




### R40-60° (4.5W)




### R100-90° (23W)




### R75-90° (17W)



### R40-90° (9W)



### R60-90° (18W)



SPECIFICATION SHEET

**Luminart®**

WWW.LUMINARTLIGHTING.COM

# FREEDOM LINE SYSTEM™


CEILING

TYPE:

PROJECT NAME:

## SYSTEM EXAMPLE

A new feed-drop is necessary every time power consumption exceeds the maximum power capacity (90W / driver) of the driver.

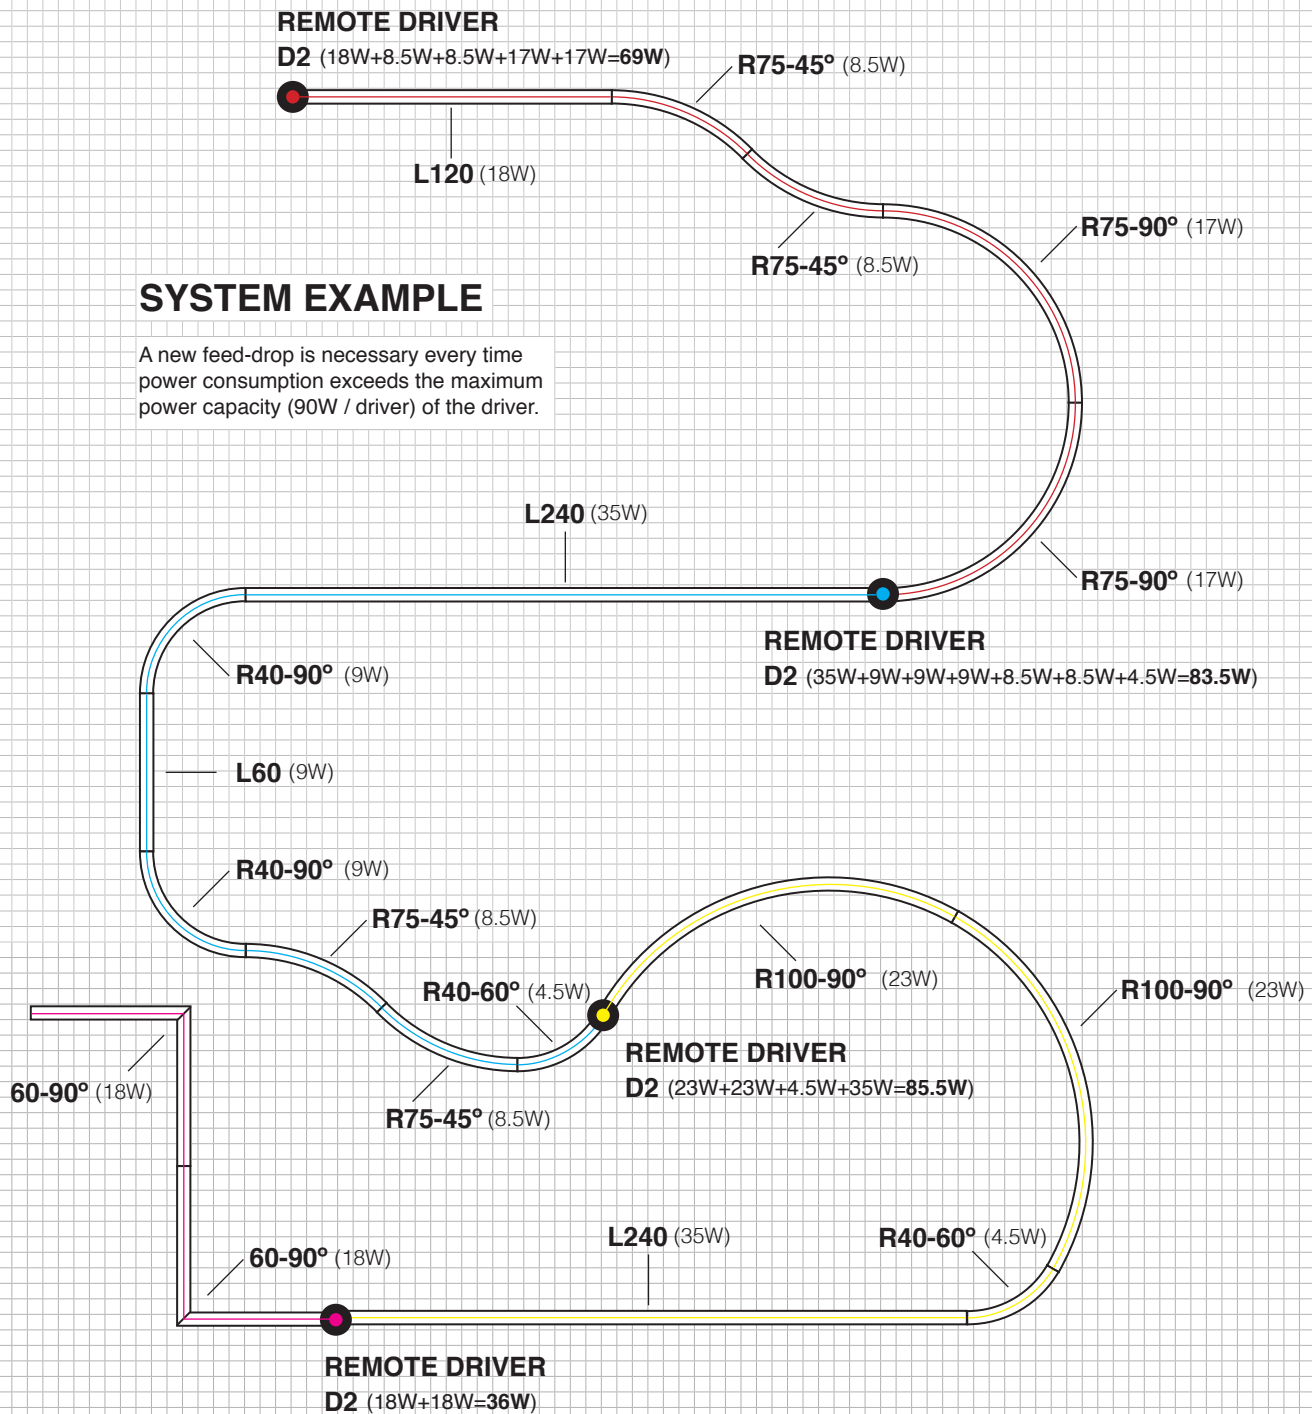

SPECIFICATION SHEET

# FREEDOM LINE SYSTEM™

CEILING

TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

## CONFIGURATION SHEET

The FREEDOM LINE system can be designed in multiple configurations by using the different modules.  
Please use the modules to create your own unique preliminary design, and submit to Luminart for engineering and quotation.



SPECIFICATION SHEET



# FREEDOM LINE SYSTEM™

**TYPE:**

## CEILING

**PROJECT NAME:**

## ORDERING INFO

## Power Options

○ 01: LED 14.4W/m 24V 1800Lm/m

LED

○ 27: 2700K

☐ 30: 3000K

☐ 35: 3500K

☐ 40: 4000K

## Dimming Options

☐ 120V LTE

☐ 120-277V 0-10V



Order Code

Quantity

SPECIFICATION SHEET

# Luminart®

- WWW.LUMINARTLIGHTING.COM