

# FREEDOM LINE SYSTEM™

CEILING

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

**Luminart®**

WWW.LUMINARTLIGHTING.COM

# FREEDOM LINE SYSTEM™

CEILING

TYPE:

PROJECT NAME:






The Freedom Line System is a modular ceiling LED luminaire system. This customizable system allows the light to form unique shapes that are well-suited to provide lighting for both residential and hospitality settings.

**Light Source:** 14.4W/m LED 24V

**Lum. flux of light source:** 1800 lm/m

**IP:** 20

**Material:** Double-layered plastic profile with the outside layer from a material resistant to UV radiation

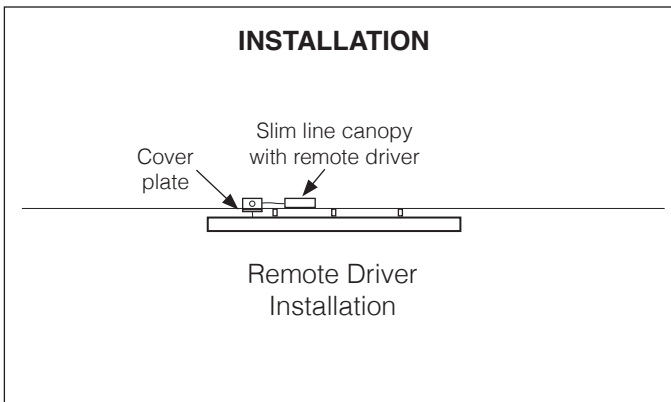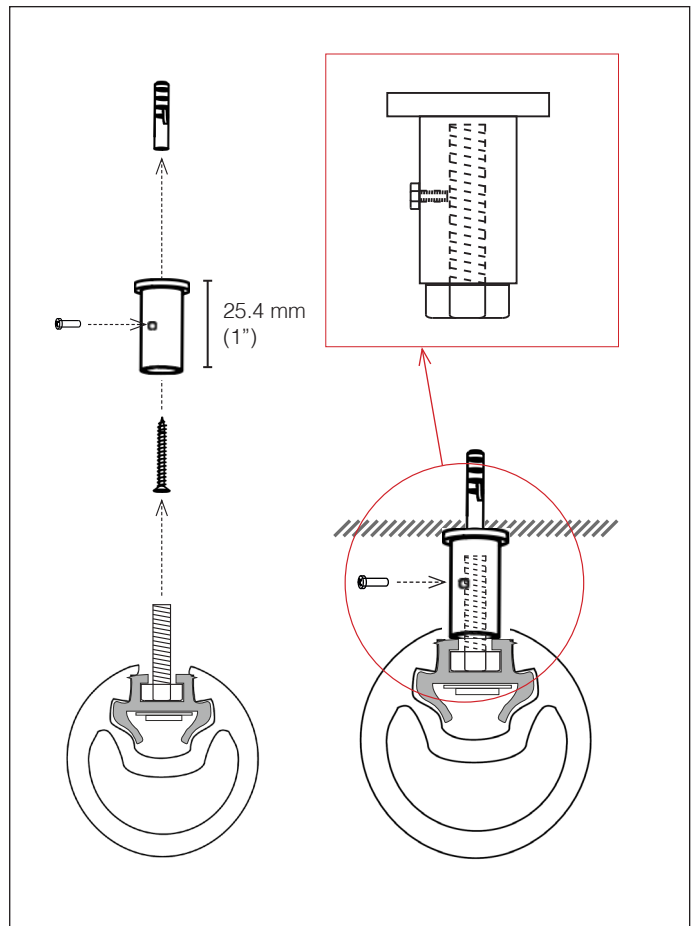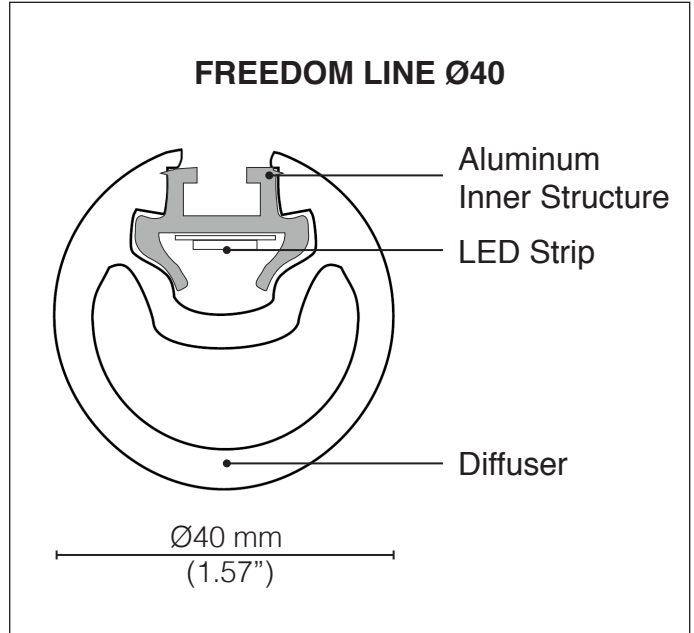

SPECIFICATION SHEET


# FREEDOM LINE SYSTEM™

CEILING


TYPE:

PROJECT NAME:

## INSTALLATION


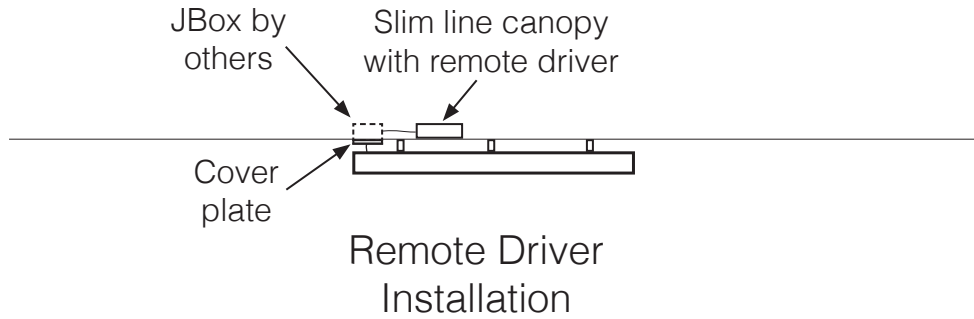


**SLIM LINE CANOPY  
WITH REMOTE DRIVER**  
L56LINED2



**D2 REMOTE DRIVER CANOPY**

Ø120mm  
(4.72")



SPECIFICATION SHEET

# FREEDOM LINE SYSTEM™


CEILING

TYPE:

PROJECT NAME:


## FREEDOM LINE L60

L56LINECL60




## FREEDOM LINE L200

L56LINECL200




## FREEDOM LINE L120

L56LINECL120



## FREEDOM LINE L250

L56LINECL250



SPECIFICATION SHEET

	Light Source [W]	Lum. flux of light source [lm] (3000K)	Code
Freedom Line L60	9W	1080 lm	L56LINECL60
Freedom Line L120	18W	2160 lm	L56LINECL120
Freedom Line L200	29W	3600 lm	L56LINECL200
Freedom Line L250	36W	4500 lm	L56LINECL250


# FREEDOM LINE SYSTEM™

TYPE:


CEILING

PROJECT NAME:

**FREEDOM LINE R100-90°**  
L56LINECR10090D




**FREEDOM LINE R75-90°**  
L56LINECR7590D




**FREEDOM LINE R40-90°**  
L56LINECR4090D



**FREEDOM LINE R150-22.5°**  
L56LINECR15022D

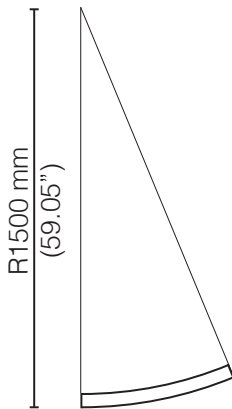


**FREEDOM LINE R75-45°**  
L56LINECR7545D



**FREEDOM LINE R40-60°**  
L56LINECR4060D



**FREEDOM LINE 90°**  
L56LINECR6090D



	Light Source [W]	Lum. flux of light source [lm] (3000K)	Code
Freedom Line R100-90°	23W	2827 lm	L56LINECR10090D
Freedom Line R75-90°	17W	2120 lm	L56LINECR7590D
Freedom Line R40-90°	9W	1130 lm	L56LINECR4090D
Freedom Line R150-22.5°	8.5W	1060 lm	L56LINECR15022D
Freedom Line R75-45°	8.5W	1060 lm	L56LINECR7545D
Freedom Line R40-60°	4.5W	753 lm	L56LINECR4060D
Freedom Line 60-90°	18W	2160 lm	L56LINECR6090D

SPECIFICATION SHEET

# FREEDOM LINE SYSTEM™

CEILING


TYPE:

PROJECT NAME:


## CONFIGURATION SHEET

The FREEDOM LINE system can be designed in multiple configurations by using the different modules below. Please use the modules to create your own unique preliminary design, and submit to Luminart for engineering and quotation.


**CL60** (9W)




**CL120** (18W)



**CL200** (29W)



**CL250** (36W)



■ **D1 INTEGRATED DRIVER CANOPY**


● **D2 REMOTE DRIVER CANOPY**

A new feed-drop is necessary every time power consumption exceeds the maximum power capacity (90W) of the driver.


**CR150-22.5°** (8.5W)




**CR75-45°** (8.5W)




**CR40-60°** (4.5W)



**CR100-90°** (23W)




**CR75-90°** (17W)



**CR40-90°** (9W)



**CR60-90°** (18W)



SPECIFICATION SHEET

# FREEDOM LINE SYSTEM™


CEILING

TYPE:

PROJECT NAME:

## SYSTEM EXAMPLE

A new feed-drop is necessary every time power consumption exceeds the maximum power capacity (90W / driver) of the driver.

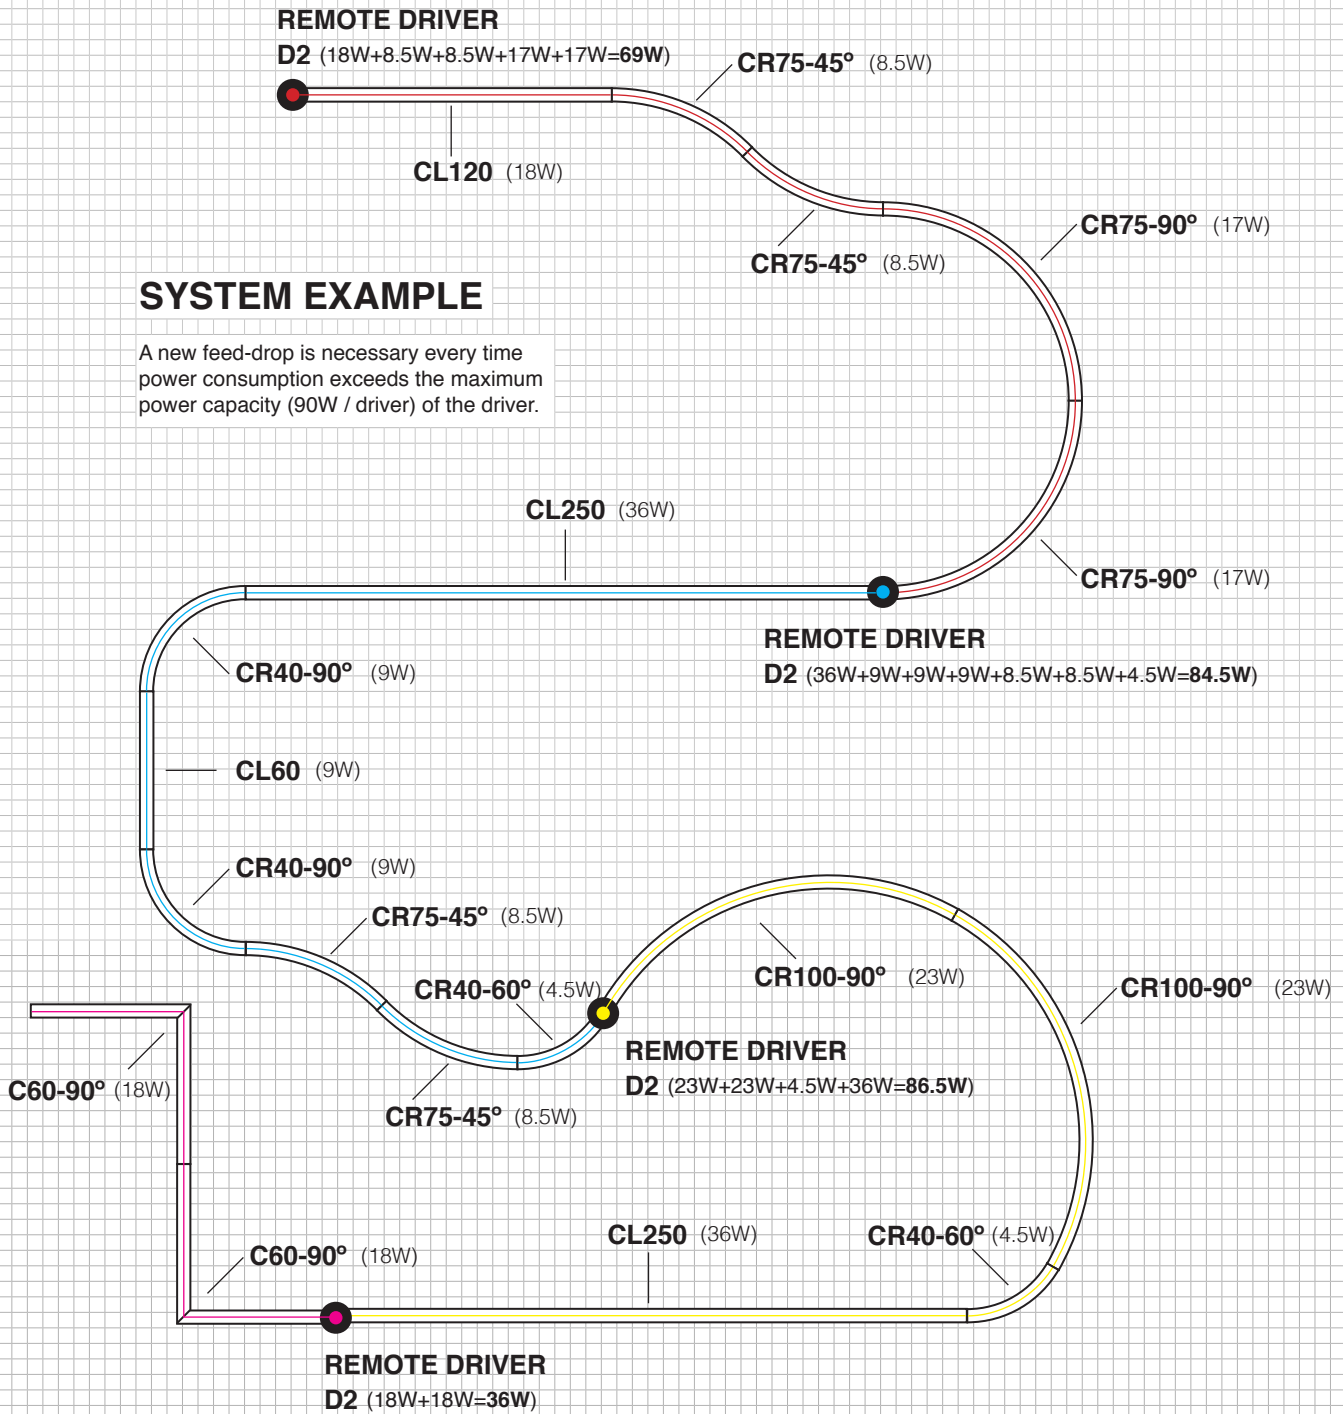

SPECIFICATION SHEET

# FREEDOM LINE SYSTEM™

CEILING

TYPE:

PROJECT NAME:

## CONFIGURATION SHEET

The FREEDOM LINE system can be designed in multiple configurations by using the different modules.  
Please use the modules to create your own unique preliminary design, and submit to Luminart for engineering and quotation.

SPECIFICATION SHEET

