FREEDOM SQUARE™
SUSPENSION

FREEDOM SQUARE™
SUSPENSION

The Freedom Square is a square shape pendant LED luminaire. The different sizes is well-suited to provide lighting for both residential and hospitality settings.

Light Source: 70-104W

Lum. flux of light source: 6480-8100 lm

IP: 20

Material: Double-layered plastic profile with the outside layer from a material resistant to UV radiation

Mounting:
Supplied with 80" (2000mm) long suspension aircraft cable (standard) and canopy. To be installed on a standard 4" octogonal junction box.
Custom cable length on request (Please specify).

FREEDOM SQUARE

Aluminum Inner Structure
LED Strip
Diffuser

40 x 40 mm
(1.57" x 1.57")

Ceiling
Aircraft cable
LED Strip
Diffuser

INSTALLATION OPTIONS

Surface mount canopy with driver

Slim line canopy with remote driver

Cover plate

Remote driver

Integrated Driver Installation

Remote Driver Installation

Luminart®

WWW.LUMINARTLIGHTING.COM

FREEDOM SQUARE™

SUSPENSION

FREEDOM SQARE
120 x 120
L56SQ120120

FREEDOM SQARE
180 x 180
L56SQ180180
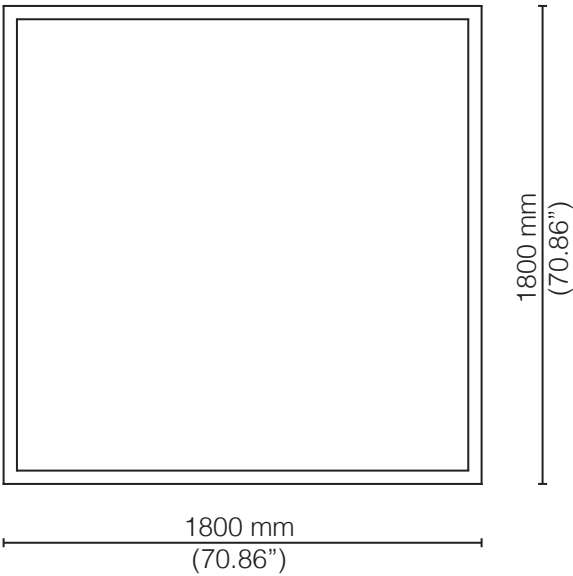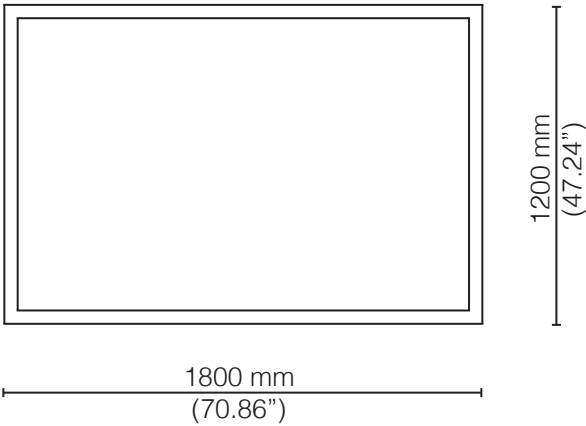
1200 mm
(47.24")

1200 mm
(47.24")

1800 mm
(70.86")

1800 mm
(70.86")

FREEDOM SQARE
120 x 180
L56SQ120180

1200 mm
(47.24")

1800 mm
(70.86")

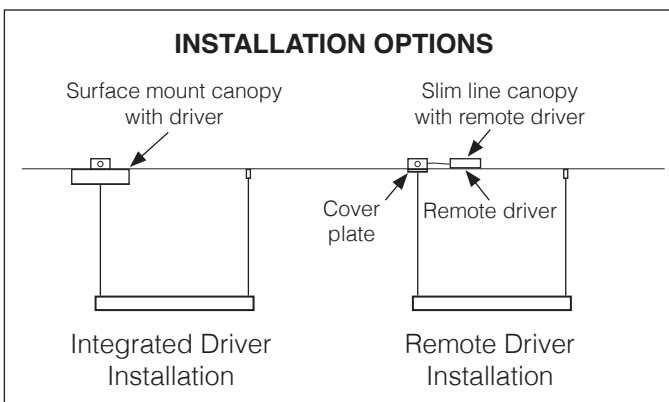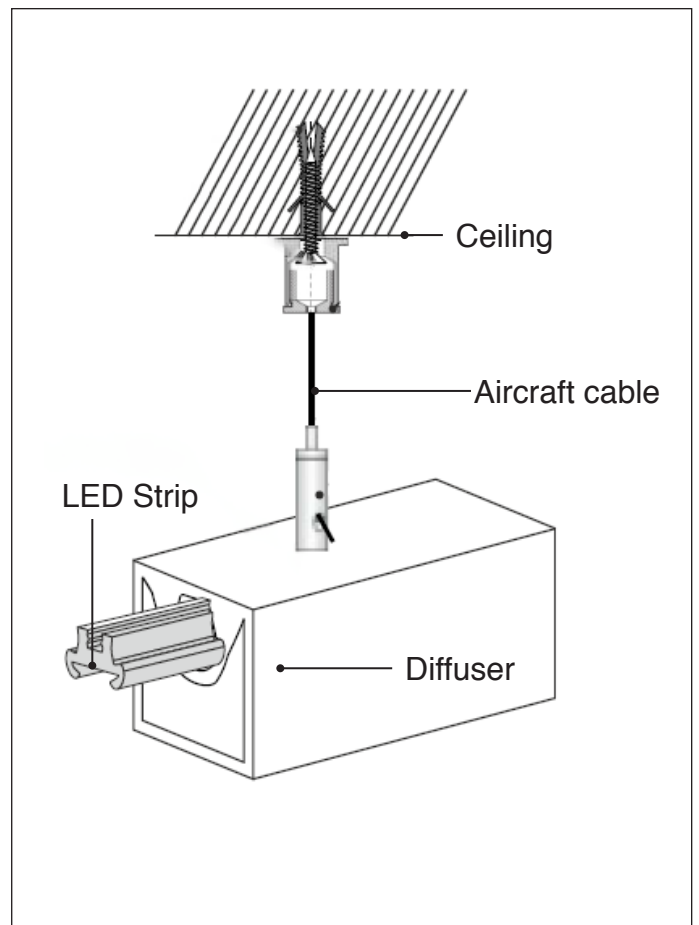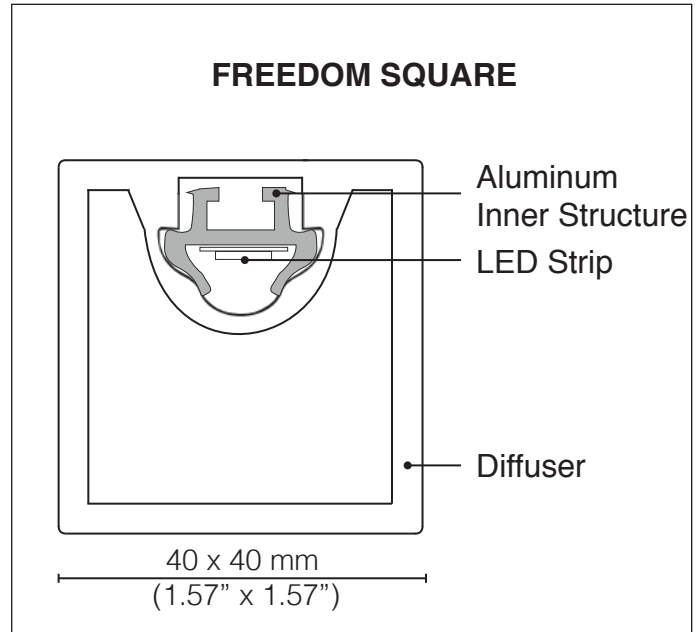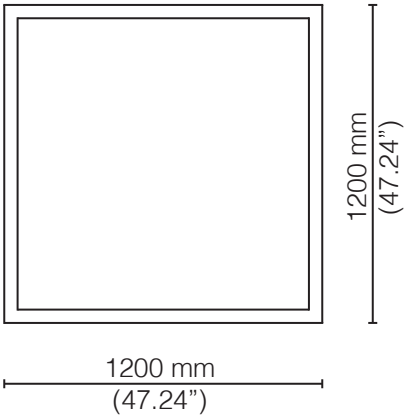# FREEDOM SQUARE™
SUSPENSION

TYPE:

PROJECT NAME:

FREEDOM SQARE
120 x 120
L56SQ120120

1200 mm
(47.24")

2000 mm
(78.74")

1200 mm
(47.24")
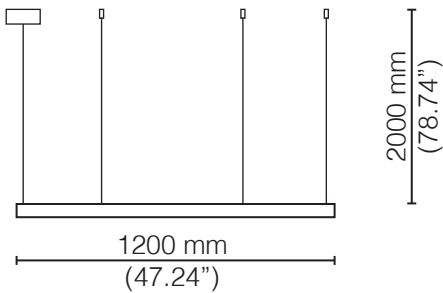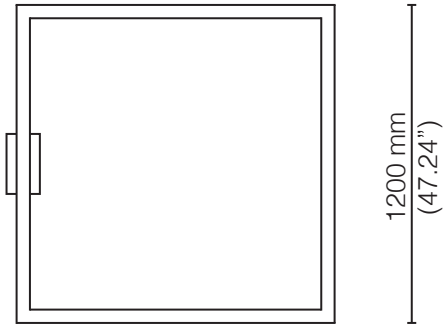
Light Source: 70W LED

Lum. flux of light source: 6480 lm

FREEDOM SQARE
180 x 180
L56SQ180180

1800 mm
(70.86")

2000 mm
(78.74")

1800 mm
(70.86")
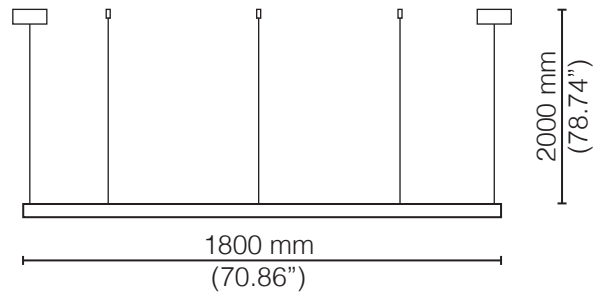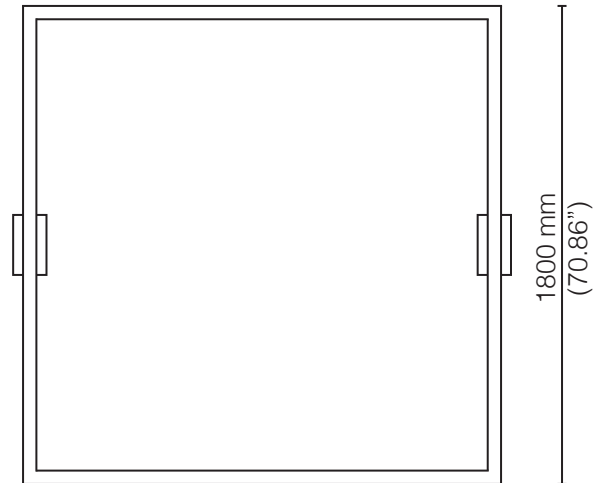
Light Source: 104W LED

Lum. flux of light source: 9720 lm

SPECIFICATION SHEET

ORDERING INFO

Model (Order Code)	LED	Installation Options	Driver Options
○ L56SQ120120	○ 27: 2700K	○ RM: Slim line canopy with remote driver	○ 120V LTE
○ L56SQ180180	○ 30: 3000K	○ IT: Surface mount canopy with integrated driver	○ 120V-277V 0-10V
	○ 35: 3500K		
	○ 40: 4000K		

ETL
Intertek

FREEDOM SQUARE™
SUSPENSION

TYPE:

PROJECT NAME:

FREEDOM SQARE
120 x 180
L56SQ120180

FREEDOM SQARE CUSTOM SIZE
A x B
L56SQAB

1200 mm
(47.24")

2000 mm
(78.74")

1800 mm
(70.86")

B

2000 mm
(78.74")

A
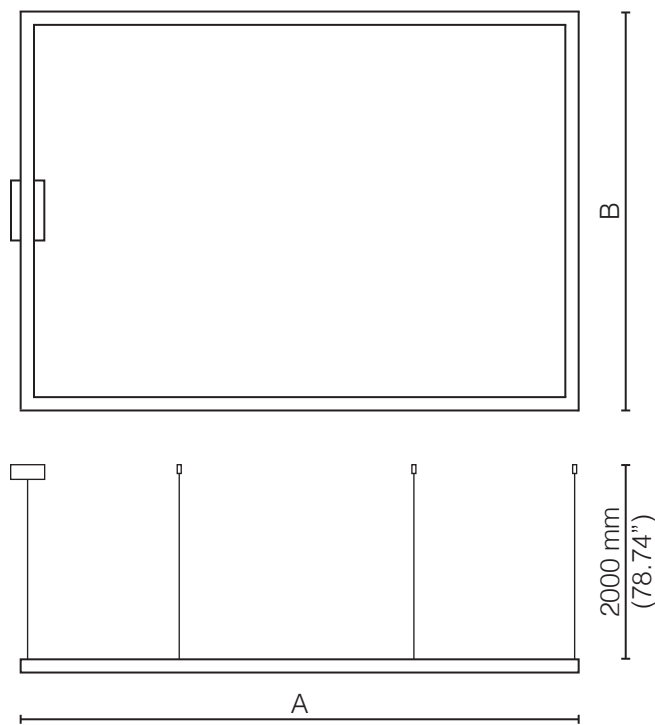
Light Source: 86W LED

Lum. flux of light source: 8100 lm

ORDERING INFO

Model (Order Code)	LED	Installation Options	Driver Options
◯ L56SQ120180	◯ 27: 2700K	◯ RM: Slim line canopy with remote driver	◯ 120V LTE
◯ L56SQAB	◯ 30: 3000K	◯ IT: Surface mount canopy with integrated driver	◯ 120V-277V 0-10V
(Please fill in the Length: A and width: B)	◯ 35: 3500K		
	◯ 40: 4000K		

ETL
Intertek

Luminart®

WWW.LUMINARTLIGHTING.COM