

FREEDOM SQUARETM


TYPE:

SUSPENSION

PROJECT NAME:

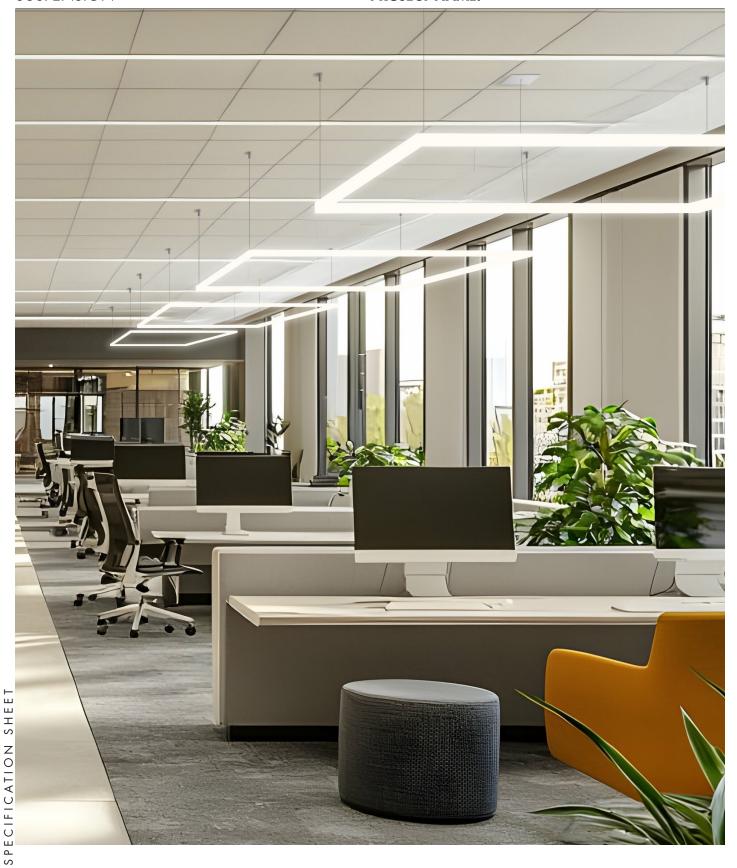

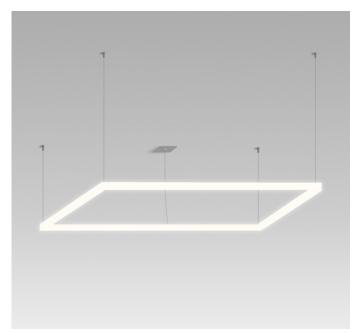



Light Source: 70-104W

Lum. flux of light source: 6480-8100 lm


IP: 20


Material: Double-layered plastic profile with the outside layer from a material resistant to UV radiation


Mounting:

Supplied with 80" (2000mm) long suspension aircraft cable (standard) and canopy. To be installed on a standard 4" octogonal junction box.

Custom cable length on request (Please specify).

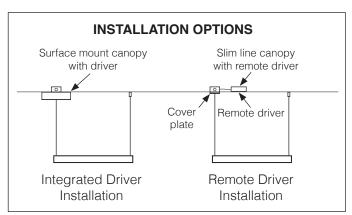


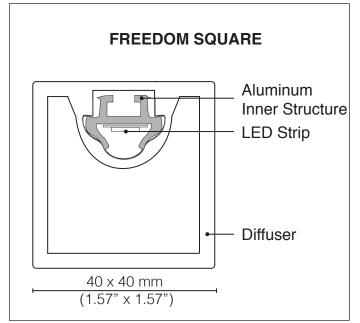

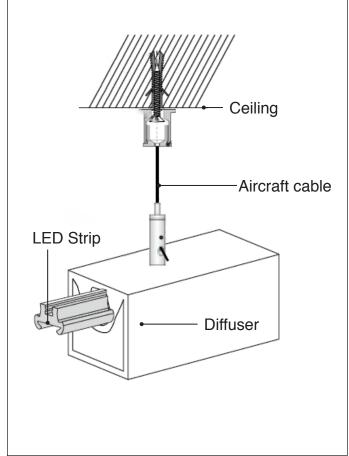


FREEDOM SQARE 120 x 120

L56SQ120120




FREEDOM SQARE 180 x 180

L56SQ180180



FREEDOM SQARE 120 x 180

L56SQ120180



FREEDOM SQUARETM


TYPE:

SUSPENSION


PROJECT NAME:


FREEDOM SQARE 120 x 120

L56SQ120120



L56SQ180180

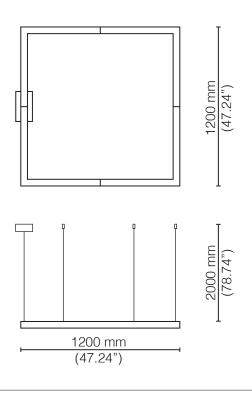

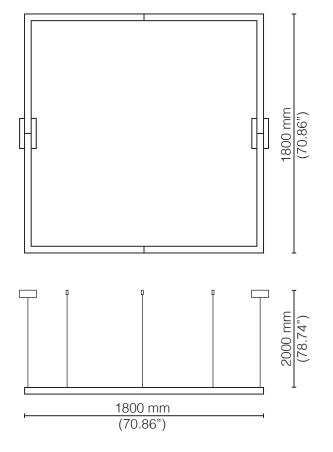

Light Source: 70W LED

Lum. flux of light source: 6480 lm

Light Source: 104W LED

Lum. flux of light source: 9720 lm

ORDERING INFO	_	_	_
Model (Order Code)	LED	Installation Options	Driver Options
○ L56SQ120120	○27: 2700K	RM: Slim line canopy with remote driver	○ 120V LTE
) L56SQ180180	30: 3000K35: 3500K40: 4000K	OIT: Surface mount canopy with integrated driver	○ 120V-277V 0-10V
	C 10. 10001K		Intert



FREEDOM SQUARETM

TYPE:

SUSPENSION


PROJECT NAME:

FREEDOM SQARE 120 x 180

A x B L56SQAB

FREEDOM SQARE CUSTOM SIZE

L56SQ120180

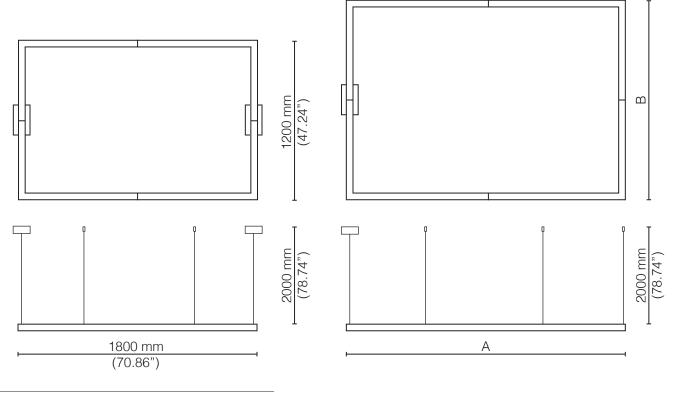

Light Source: 86W LED

Lum. flux of light source: 8100 lm

Model (Order Code)

SHEET **ORDERING INFO**

LED

OL56SQ120180 ○ 27: 2700K ○ L56SQAB ○30: 3000K

(Please fill in the Length: A and width: B) ○35: 3500K ○40: 4000K Installation Options

 \bigcirc RM: Slim line canopy with remote driver

OIT: Surface mount canopy with integrated driver

Driver Options

○ 120V LTE O 120V-277V 0-10V



