

KYKLO

CEILING

TYPE:

PROJECT NAME:




KYKLO – 40

CODE NO.	L981241.24V
LAMP	LED
COLOR TEMPERATURE	3K [3000K] / 4K [4000K]
NOMINAL LUMEN	1000
REAL LUMEN OUTPUT	750
WATTAGE	10W

IP

IP 65

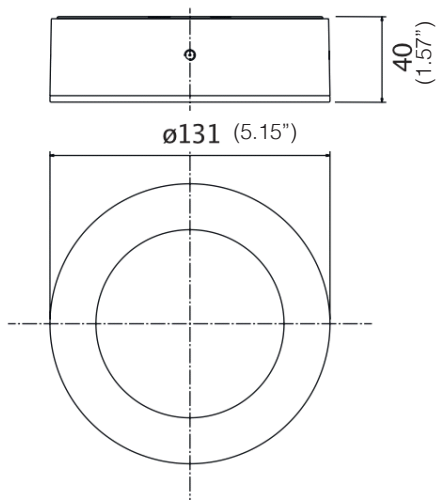

add 12 to the code




standard



add 90 to the code



honeycomb
add HC to the code



Outdoor luminaire for ceiling installation.
Lamp body, base and glass holder frame in primary anti-corrosion aluminum with low copper content.
Transparent tempered glass diffuser.
LED light source, CRI 80.
Four light beam openings via LED optics with incorporated parabola: 12 ° (option) / 40 ° (standard) / 90 ° (option) / HC (honeycomb - option)
L80B20 led life guaranteed 60,000 hours with subsequent max decay of 20%. Other LED tones on request.
Double varnished finish after pickling, trivalent chromic passivation, epoxy primer and polyester powder coating.

ORDERING INFO

Model (Order Code)

Finish

LED

Integral Driver Options

- ☐ Anthracite
☐ Aluminum Grey
☐ White

- ☐ 3000K
☐ 4000K

- ☐ 120V Phase Dimming



Luminart®

WWW.LUMINARTLIGHTING.COM

SPECIFICATION SHEET

KYKLO

CEILING

TYPE:

PROJECT NAME:



KYKLO – 40 – OPAL

CODE NO.	L981242.24V
LAMP	LED
COLOR TEMPERATURE	3K [3000K] / 4K [4000K]
NOMINAL LUMEN	1000
REAL LUMEN OUTPUT	500
WATTAGE	10W

IP

IP 65   

Outdoor luminaire for ceiling installation.

Lamp body, base and glass holder frame in primary anti-corrosion aluminum with low copper content.


LED light source, CRI 80.

Opal diffuser with 120° opening angle through incorporated LED optic.

L80B20 led life guaranteed 60,000 hours with subsequent max decay of 20%.

Other LED tones on request.

Double varnished finish after pickling, trivalent chromic passivation, epoxy primer and polyester powder coating.

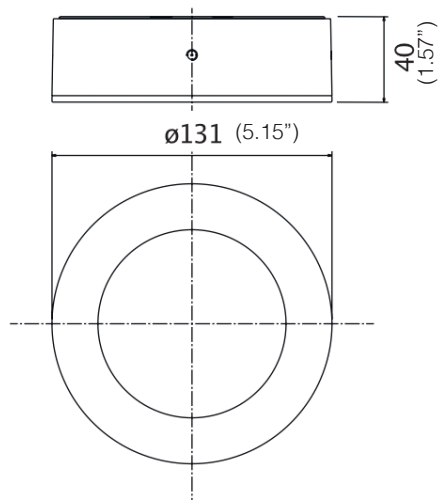

ORDERING INFO

Model (Order Code)

Finish

LED

Integral Driver Options

- ☐ Anthracite
☐ Aluminum Grey
☐ White

- ☐ 3000K
☐ 4000K

- ☐ 120V Phase Dimming



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM