

ORION™ D

BOLLARD

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

ORION™ D

BOLLARD

TYPE:

PROJECT NAME:



Fixture Specifications

Protection . IP 65 - IK 08

Body Pole . Extruded aluminium alloy

Body/Base . Die-cast aluminium alloy

Screen . Frosted glass

Seals . Closed-cell EPDM rubber

Screws . Stainless steel A2

Paint / Finishing . Anti-corrosive UV stabilised polyester powder

Finishes



PURE WHITE
RAL 9016



BLACK
RAL 9005



WHITE
RAL 9010



BRONZE



RUST



ANTHRACITE



SLATE GREY



GREY
RAL 9006

Assembly

Ground connection system with anchoring brackets to be ordered separately. The orientation is independent of the layout of the ground fixing holes.

Application



Residential areas




Cycle
Pedestrian paths



Access areas



Parks
Gardens

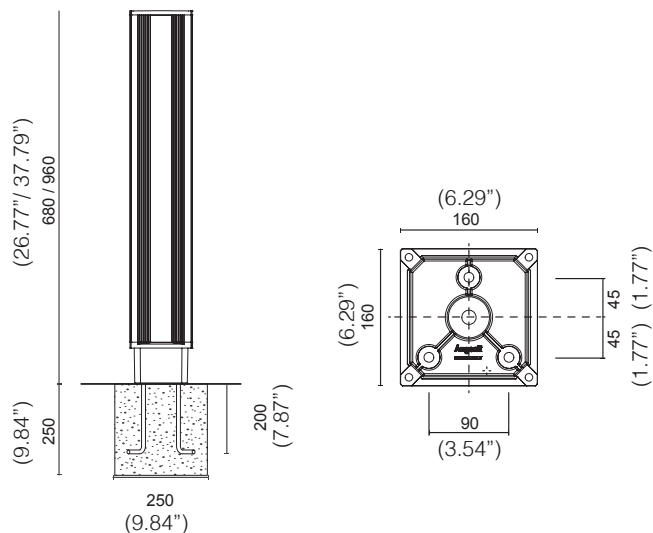



ORION™ D 680

BOLLARD


TYPE:

PROJECT NAME:

beam	class	W	source	fixture	CCT LED	CRI
 360°	I	14W	1880 lm	1120 lm	3000 K	80
 360°	I	14W	2020 lm	1200 lm	4000 K	80



Diffuse Emission 360°
Frosted Glass

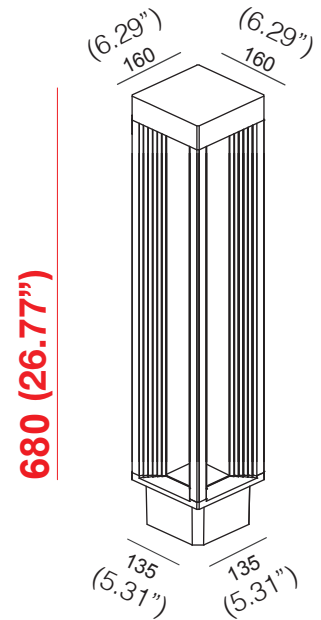

Assembly / Usage
Ground installation

Ground connection system with
anchoring brackets to be
ordered separately

ORDERING INFO

Model (Order Code)	Finish Options	Accessories	LED	Dimming Options
☐ L90560F1	☐ 00: Pure White ☐ 10: White ☐ 24: Bronze ☐ 25: Rust ☐ 01: Black ☐ 30: Anthracite ☐ 35: Slate Grey ☐ 40: Grey	☐ G: Ground Anchoring Bracket	☐ 30: 3000K ☐ 40: 4000K	☐ 120V LTE ☐ 120V-277V 0-10V (Universal Voltage)



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM



ORION™ D 960

BOLLARD


TYPE:

PROJECT NAME:

beam	class	W	source	fixture	CCT LED	CRI
 360°	I	14W	1880 lm	1120 lm	3000 K	80
 360°	I	14W	2020 lm	1200 lm	4000 K	80



Diffuse Emission 360°
Frosted Glass

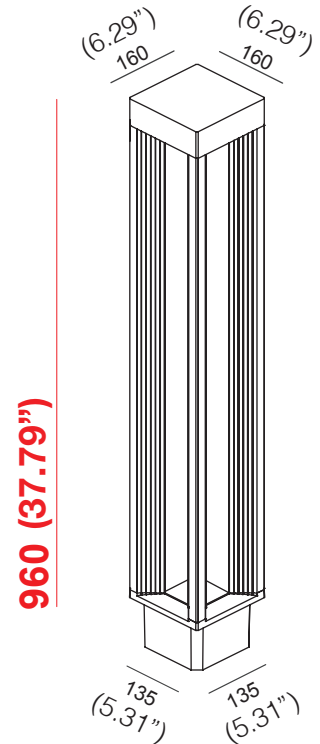

Assembly / Usage
Ground installation

Ground connection system with
anchoring brackets to be
ordered separately

ORDERING INFO

Model (Order Code)	Finish Options	Accessories	LED	Dimming Options
☐ L90560F2	☐ 00: Pure White ☐ 10: White ☐ 24: Bronze ☐ 25: Rust ☐ 01: Black ☐ 30: Anthracite ☐ 35: Slate Grey ☐ 40: Grey	☐ G: Ground Anchoring Bracket	☐ 30: 3000K ☐ 40: 4000K	☐ 120V LTE ☐ 120V-277V 0-10V (Universal Voltage)



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM