

ORION™ D

POLES

TYPE:

PROJECT NAME:



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM

ORION™ D

POLES

TYPE:

PROJECT NAME:



Fixture Specifications

Protection . IP 65 - IK 08

Body Pole . Extruded aluminium alloy

Body/Base . Die-cast aluminium alloy

Screen . Frosted glass

Seals . Closed-cell EPDM rubber

Screws . Stainless steel A2

Paint / Finishing . Anti-corrosive UV stabilised polyester powder

Finishes



PURE WHITE
RAL 9016



BLACK
RAL 9005



WHITE
RAL 9010



BRONZE



RUST



ANTHRACITE



SLATE GREY



GREY
RAL 9006

Assembly

Ground connection system with anchoring brackets to be ordered separately. The orientation is independent of the layout of the ground fixing holes.

Application



Residential areas





Cycle
Pedestrian paths



Access areas



Parks
Gardens

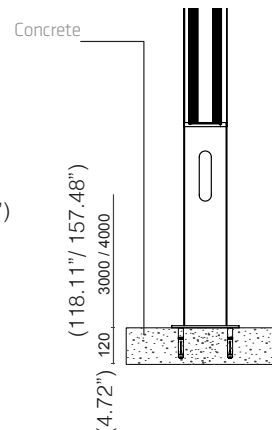

SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM



ORION™ D 3000

POLES

TYPE:

PROJECT NAME:


beam	class	W	source	fixture	CCT LED	CRI
 360°	I	35W	4720 lm	2800 lm	3000 K	80
 360°	I	35W	5000 lm	2980 lm	4000 K	80

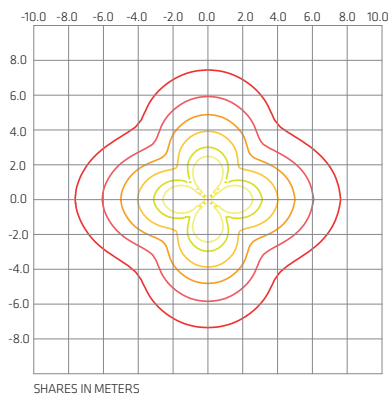

4000K - 35W
H 3000 mm

- 60 lux
- 40 lux
- 20 lux
- 10 lux
- 5 lux
- 2 lux

3000 (118.11")

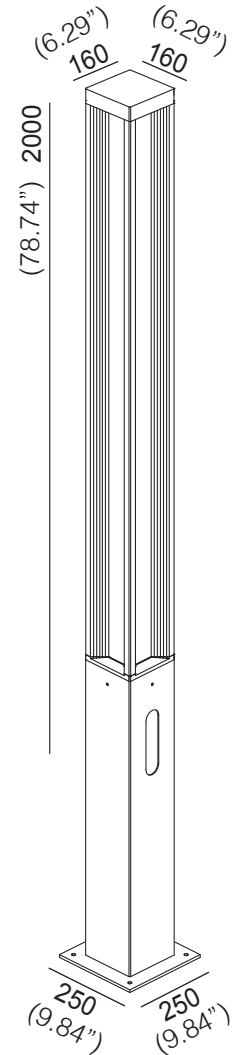

ORDERING INFO

Model (Order Code)	Finish Options	Accessories	LED	Dimming Options
☐ L90570F2	☐ 00: Pure White ☐ 10: White ☐ 24: Bronze ☐ 25: Rust ☐ 01: Black ☐ 30: Anthracite ☐ 35: Slate Grey ☐ 40: Grey	☐ G: Ground Anchoring Bracket	☐ 30: 3000K ☐ 40: 4000K	☐ 120V LTE ☐ 120V-277V 0-10V (Universal Voltage)



SPECIFICATION SHEET

Luminart®

WWW.LUMINARTLIGHTING.COM



ORION™ D 4000

POLES


TYPE:

PROJECT NAME:

beam	class	W	source	fixture	CCT LED	CRI
 360°	I	35W	4720 lm	2800 lm	3000 K	80
 360°	I	35W	5000 lm	2980 lm	4000 K	80

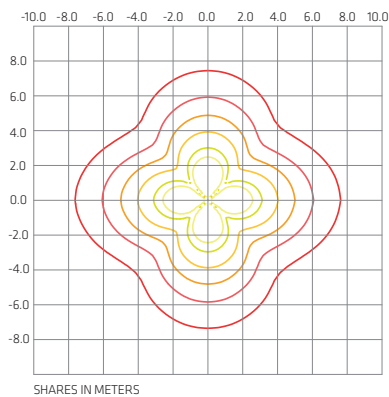

4000 (157.48")

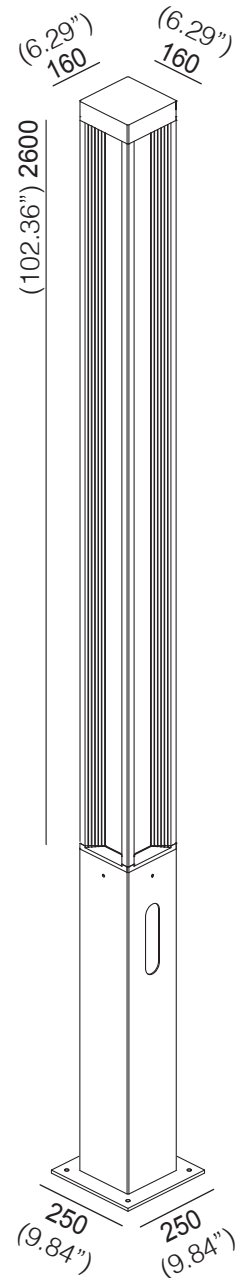

SPECIFICATION SHEET

ORDERING INFO

ORION D 4000

G

Model (Order Code)

Finish Options

Accessories

LED

Dimming Options

☐ L90570F4

- ☐ 00: Pure White
- ☐ 10: White
- ☐ 24: Bronze
- ☐ 25: Rust
- ☐ 01: Black
- ☐ 30: Anthracite
- ☐ 35: Slate Grey
- ☐ 40: Grey

☐ G: Ground Anchoring Bracket

- ☐ 30: 3000K
- ☐ 40: 4000K

- ☐ 120V LTE
- ☐ 120V-277V 0-10V (Universal Voltage)



Luminart®

WWW.LUMINARTLIGHTING.COM